FISEVIER

Contents lists available at ScienceDirect

Construction and Building Materials

journal homepage: www.elsevier.com/locate/conbuildmat



Corrigendum



Corrigendum to "Embraced wood: Circular construction method for composite long-span beams from unprocessed reclaimed timber, fibers and clay" [Constr. Build. Mater. 416 (2024) 135096]

Pelin Asa ^{a,b,d,*}, Christelle El Feghali ^b, Christian Steixner ^b, Yasaman Tahouni ^{b,e}, Hans Jakob Wagner ^{b,e}, Jan Knippers ^{c,e}, Achim Menges ^{b,e}

- ^a Department of Biomaterials, Max Planck Institute of Colloids and Interfaces, Potsdam, Germany
- ^b Institute for Computational Design and Construction (ICD), University of Stuttgart, Stuttgart, Germany
- ^c Institute of Building Structures and Structural Design (ITKE), University of Stuttgart, Stuttgart, Germany
- ^d Cluster of Excellence Matters of Activity (MoA), Humboldt-Universität zu Berlin, Berlin, Germany
- ^e Cluster of Excellence Integrative Design and Construction for Architecture (IntCDC), University of Stuttgart, Stuttgart, Germany

The authors regret the missing Graph 4 and Reference [10] J. Kalcher, G. Praxmarer, and A. Teischinger, "Quantification of future availabilities of recovered wood from Austrian residential buildings," Resour. Conserv. Recycl., vol. 123, pp. 143–152, Aug. 2017, doi: 10.1016/j.resconrec.2016.09.001


The authors would like to apologise for any inconvenience caused.

Graph 4. Emission tests results after 24 h. The lower the dip at the wavelength reading at 3300 nm represents the higher presence of organic compounds in the environment.

E-mail address: pelin.asa@mpikg.mpg.de (P. Asa).

DOI of original article: https://doi.org/10.1016/j.conbuildmat.2024.135096.

^{*} Correspondence to: Department of Biomaterials, Max Planck Institute of Colloids and Interfaces, Potsdam Science Park, Am Mühlenberg 1, Potsdam 14476, Germany

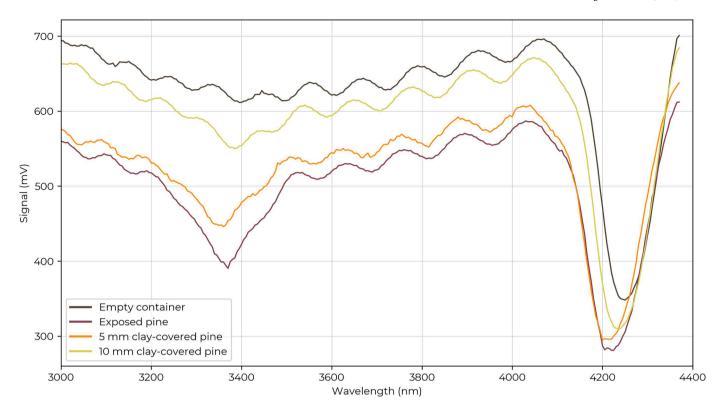

DOI of original article: 10.1016/j.conbuildmat.2024.135096