

This discussion paper is/has been under review for the journal Atmospheric Chemistry and Physics (ACP). Please refer to the corresponding final paper in ACP if available.

Vehicle emissions of greenhouse gases and related tracers from a tunnel study: CO : CO₂, N₂O : CO₂, CH₄ : CO₂, O₂ : CO₂ ratios, and the stable isotopes ¹³C and ¹⁸O in CO₂ and CO

M. E. Popa¹, M. K. Vollmer², A. Jordan³, W. A. Brand³, S. L. Pathirana¹,
M. Rothe³, and T. Röckmann¹

¹Institute for Marine and Atmospheric research Utrecht, Utrecht University, Princetonplein 5, 3508TA Utrecht, the Netherlands

²Empa, Swiss Federal Laboratories for Materials Testing and Research, Laboratory for Air Pollution and Environmental Technology, Überlandstrasse 129, 8600 Dübendorf, Switzerland

³Max-Planck Institute for Biogeochemistry, Hans-Knöll-Str. 10, 07745 Jena, Germany

Received: 7 August 2013 – Accepted: 15 August 2013 – Published: 6 September 2013

Correspondence to: M. E. Popa (epopa2@yahoo.com)

Published by Copernicus Publications on behalf of the European Geosciences Union.

23549

Abstract

Measurements of CO₂, CO, N₂O and CH₄ mole fractions, O₂/N₂ ratios and the stable isotopes ¹³C and ¹⁸O in CO₂ and CO have been performed in air samples from the highway tunnel Islisberg (Switzerland). The CO : CO₂ ratios, with an average of (4.15 ± 0.34) ppb : ppm, are lower than reported by previous studies, pointing to a reduction in CO emissions from traffic. The ¹³C in CO₂ reflects the isotopic composition of the fuel. ¹⁸O in CO₂ is slightly depleted compared to the ¹⁸O in atmospheric O₂, and shows significant variability. In contrast, the δ¹³C values of CO show that significant fractionation takes place during CO destruction in the catalytic converter. ¹³C in CO is enriched by 3 ‰ compared to the ¹³C in the fuel burnt, while the ¹⁸O content is similar to that of atmospheric O₂. We compute a fractionation constant of (−2.7 ± 0.7) ‰ for ¹³C during CO destruction. The N₂O : CO₂ average ratio (1.8 ± 0.2) × 10^{−2} ppb : ppm is significantly lower than in past studies, showing a reduction in N₂O emissions likely related to improvements in the catalytic technology. We also observed small CH₄ emissions, with an average CH₄ : CO₂ ratio of (4.6 ± 0.2) × 10^{−2} ppb : ppm. The O₂ : CO₂ ratios of (−1.47 ± 0.01) ppm : ppm are very close to the expected, theoretically calculated values.

1 Introduction

In densely populated areas, traffic emissions are a significant source of trace gases and pollutants. The main product of fuel burning is CO₂, but a wide series of other gases are emitted concurrently. Some of these are short lived and have mainly local health and environmental effects. Long lived gases, like CO₂, CH₄, N₂O, CO, and H₂ are (indirect) greenhouse gases and have global effects on atmospheric chemistry and climate.

CO₂ emissions from traffic can be computed fairly accurately from fuel consumption statistics. The emissions of other gases are more difficult to estimate and depend

23550

strongly on technology, vehicle type and driving conditions. The introduction of catalytic converters led to a strong decrease in the emissions of some gases, and emissions further decreased with each generation of emission standards. For example, the accepted CO emission for Euro 3 passenger gasoline vehicles was 2.3 g km^{-1} , and the Euro 4 standard decreased the limit to 1 g km^{-1} . Other relevant gases, like for example H_2 and N_2O , are not controlled by the existing vehicle emission standards, while CH_4 is usually only included in the total hydrocarbon category. However, vehicle emissions of N_2O and CH_4 have to be estimated and included in annual reports by the UNFCCC partners. These estimations are based on traffic statistics and emission factors, thus it is important that emission factors reflect the actual real-life emissions.

Because of the relatively fast evolution of vehicle technology and emission standards, emissions can change significantly on time scales of several years. Besides this, different composition and age of the car fleet lead to large regional differences in emissions.

Vehicle emission rates (or factors) are used together with traffic statistics to estimate traffic emissions at various scales. Emission rates are often obtained in laboratory setup by dynamometer studies, but it has been shown that the results do not always represent the real-life emissions (Ropkins et al. (2009) and references therein). Tunnel measurements proved to be very useful for estimating real-world fleet-wide emission rates (see Ropkins et al. (2009) for a review of emission estimation methods). The obvious advantage of a tunnel setup is that it allows observing real-life traffic emissions while keeping out other possible sources. Tunnel studies have, however, some limitations, for example they are mostly representative for fluent traffic conditions and not for urban driving with frequent stops and accelerations. Thus tunnel measurements have to be complemented by other types of measurements in order to obtain a complete picture.

The Islisberg-2011 measurement campaign took place in June–July 2011 at the Islisberg highway tunnel located near Zürich, Switzerland, with the intention to update (where older estimates exist) or quantify emissions and isotopic signatures of several

23551

important long lived trace gases, characteristic to the actual West-European vehicle fleet.

The purpose of the present paper is as follows:

- to quantify $\text{CO}:\text{CO}_2$, $\text{N}_2\text{O}:\text{CO}_2$ and $\text{CH}_4:\text{CO}_2$ emission ratios for the present vehicle fleet;
- to determine the present isotopic signatures of traffic-emitted CO_2 and CO ;
- to verify the theoretically calculated $\text{O}_2:\text{CO}_2$ ratios of traffic emissions.

Results on the $\text{H}_2:\text{CO}$ emission ratios and H_2 isotopic signatures will be presented in a different publication.

The remainder of the paper is organized as follows. Section 1.1 contains background information on each species dealt with in the paper – we considered necessary to include this information, but it can be skipped by the expert reader. Section 2 presents the sampling and measurement methods. Section 3 starts with a general description of the data acquired and continues with a detailed discussion on the $\text{CO}:\text{CO}_2$ ratios and the isotopic composition of CO_2 and CO , followed by $\text{N}_2\text{O}:\text{CO}_2$, $\text{CH}_4:\text{CO}_2$ and $\text{O}_2:\text{CO}_2$ ratios. Section 4 contains a summary of our findings. The supplementary material includes a more detailed description of the CO mole fraction measurements at IMAU, and the main numerical data used in the paper.

1.1 Background on the investigated species

1.1.1 $\text{CO}:\text{CO}_2$ ratios

CO is an atmospheric trace gas that results from incomplete oxidation of carbon. Anthropogenic emissions are responsible for a large part of the global CO ; in Europe anthropogenic sources account for about 70 % of the total sources (Pfister et al., 2004).

CO is important for the atmospheric chemistry, mainly due to its reaction with OH radicals. CO is also a toxic gas and, because some of its largest sources are associ-

23552

ated with human agglomerations, it is a concern for human (and animal) health. Thus most urban air quality monitoring programs include CO. Besides these, CO is a good tracer for detecting and quantifying anthropogenic emissions from burning processes, since it is a product of incomplete burning. For example, the ratio between atmospheric variations of CO and CO₂ (the CO : CO₂ ratio) has been used to quantify the fossil fuel contribution to the CO₂ variability, and the CO₂ fossil fuel fluxes (e.g. Gamnitzer et al., 2006; Levin and Karstens, 2007; Rivier et al., 2006; Turnbull et al., 2006, 2011; Zondervan and Meijer, 1996). The CO : CO₂ ratios are higher for poorer burning (e.g. forest fires), thus these ratios can be used to distinguish between different burning processes or to determine the burning efficiency (Andreae and Merlet, 2001; Röckmann et al., 2010; Suntharalingam et al., 2004; Wang et al., 2010).

Anthropogenic emissions of CO have been decreasing over the last two decades according to various inventories (see e.g. Granier et al., 2011) and the decrease in emissions is reflected in decreasing atmospheric mole fractions in urban areas, background areas and in the atmospheric column (Angelbratt et al., 2011; von Schneidemesser et al., 2010; Worden et al., 2013; Zellweger et al., 2009); for Europe, the decreasing trends are larger than the global ones.

In populated regions like Europe one of the major sources of CO₂ and CO is road traffic. The CO₂ emission rate is relatively constant, as it depends directly on the quantity of fuel burnt. Emissions of CO, on the other hand, are strongly dependent on vehicle technology and thus on fleet composition. Emission standards gradually decreased the limits of allowed CO from Euro 1 to Euro 4. A gradual decrease in emissions from pre-Euro to Euro 4 cars has been confirmed by real-world measurements (e.g. Rhys-Tyler et al., 2011). The stricter vehicle emission standards and the mandatory introduction of catalytic converters in new cars at the beginning of the 1990s are partly responsible for the decrease in emissions.

It is expected that traffic CO emissions will continue to decrease while older vehicles are replaced by new ones. It is also likely that the overall anthropogenic emissions of CO in Europe (and in consequence the CO : CO₂ ratios) will continue to decrease with

23553

the evolution towards cleaner technologies, under the pressure of pollution reduction policies. Periodically updating the information on CO : CO₂ emission ratios for different sources will reduce uncertainties in CO emission inventories. This will on one hand improve the possibility to use these ratios for CO₂ source discrimination. On the other hand, for vehicle emissions, where CO₂ is relatively well known from fuel consumption, known CO : CO₂ ratios can help determining CO emissions, which is important for example for assessment and control of pollution in populated areas.

1.1.2 CO₂ stable isotopes ¹³C and ¹⁸O

Numerous studies have used the isotopic composition of atmospheric CO₂ in order to constrain various aspects of the carbon cycle (e.g. Battle et al., 2000; Gruber and Keeling, 2001; Yakir and Sternberg, 2000; Yakir and Wang, 1996). In general, the isotopic composition of atmospheric CO₂ is linked to the biosphere-atmosphere exchange and, in case of ¹⁸O, to the water cycle (Farquhar et al., 1993; Francey and Tans, 1987; Mills and Urey, 1940). However, especially in highly populated areas like Europe, a significant part of the CO₂ emitted originates from fossil fuel burning. Good knowledge on the isotopic composition of the fossil fuel derived CO₂ can in principle help interpreting atmospheric measurements and partitioning sources and sinks at local and regional level (e.g. Meijer et al., 1996; Pataki et al., 2003, 2006, 2007; Zimnoch et al., 2004; Zondervan and Meijer, 1996).

In modeling studies so far, the ¹⁸O isotopic ratio of combustion derived CO₂ is considered to be equal to the ¹⁸O isotopic ratio of atmospheric O₂ (e.g. Ciais et al., 1997; Cuntz et al., 2003). This assumes that atmospheric O₂ is consumed without fractionation; however, this has been questioned by some recent studies. For example, Affek and Eiler (2006), Horvath et al. (2012) and Schumacher et al. (2011) found the ¹⁸O in vehicle exhaust CO₂ to be significantly different from the ¹⁸O in atmospheric O₂; combustion of other materials has been shown to suffer fractionation processes affecting

23554

¹⁸O in CO₂ as well. More work appears thus necessary for better defining the source signatures of CO₂ resulting from different burning processes.

1.1.3 CO stable isotopes ¹³C and ¹⁸O

Stable isotopes have been used as a tool to distinguish between CO emission sources, for example to distinguish between traffic and wood combustion (Saurer et al., 2009), to identify large scale pollution from forest fires (Röckmann et al., 2002) and to identify various anthropogenic emissions (e.g. Tarasova et al., 2007). Also, modeling studies that included ¹³C and ¹⁸O provided more robust results than when considering CO mole fractions alone (Bergamaschi et al., 2000; Manning et al., 1997). For these uses, however, the source specific isotopic signatures have to be known. It has been shown that the ¹³C and ¹⁸O isotopic signatures of CO from combustion sources are not necessarily the same as the ¹³C of the material burnt and the ¹⁸O in the atmospheric O₂, due to fractionation during the burning process (e.g. Kato et al., 1999a, b; Tsunogai et al., 2003). Relatively few estimates exist on the isotopic signatures of different CO sources, and in particular on traffic CO, although in some areas traffic emissions account for a large proportion of anthropogenic CO sources.

There are two main types of studies regarding the isotopic composition of CO emitted by traffic, which are complementary. One consists of fleet integrated measurements, with results representative for the real-world average traffic emissions. Only few such studies exist worldwide (Kato et al., 1999a; Stevens et al., 1972; Tsunogai et al., 2003); the most recent measurements in Europe were performed in 1997 by Kato et al. (1999a).

The other category of studies focuses on measuring emissions of individual vehicles or engines (e.g. Huff and Thiemens, 1998; Kato et al., 1999a; Tsunogai et al., 2003); upscaling their results to fleet level is not always straightforward, but these studies are particularly useful for understanding the factors controlling the emissions and the phenomena behind. As revealed by the studies above, the isotopic composition of exhaust

23555

CO is strongly dependent on vehicle technology. ¹³C in CO in exhaust gas is approximately similar to that in the fuel for old vehicles without a catalyst, and it is enriched for gasoline vehicles with catalyst and for diesel vehicles. ¹⁸O is enriched relative to atmospheric O₂ for gasoline vehicles with catalyst, and is depleted for old gasoline vehicles without catalyst and for diesel vehicles. The driving regime and the temperature of the catalyst have been observed to affect the isotopic composition of emitted CO as well.

The above implies that the isotopic composition of traffic CO should change in time with the change in technology, increasing proportion of catalyst vehicles and changing shares for different fuel types. Such evolution is already clear when comparing the results of old and new estimates, and it is expected that the CO isotopic composition will continue to change and will have to be re-evaluated periodically (Tsunogai et al., 2003).

1.1.4 N₂O : CO₂ ratios

N₂O is an important greenhouse gas, considered to be responsible for about 6 % of the anthropogenic radiative forcing (NOAA – AGGI, 2011); besides this, following the reduction of CFCs, N₂O is expected to become the most important ozone depleting gas (Ravishankara et al., 2009). Atmospheric N₂O has increased from 270 ppb in preindustrial times to 324 ppb in 2011 (Fluckiger et al., 2002; WMO, 2012), the main anthropogenic sources responsible for this increase being the use of nitrogen fertilizer, biomass burning, fossil fuel combustion and industrial production of adipic and nitric acids. For NW Europe, road transport emissions are estimated to account for about 2.6 % of the total anthropogenic N₂O (UNFCCC, 2013).

It is known that vehicles equipped with a three-way catalyst have higher N₂O emission rates than old vehicles without a catalyst, as N₂O is formed inside the catalyst as an intermediary during NO reduction (Berges et al., 1993; Cant et al., 1998; Dasch, 1992). In the beginning of the 1990s, it was predicted that N₂O emissions from vehicles would continue to increase with the increasing proportion of catalyst-fitted vehicles.

23556

Berges et al. (1993) estimated that, if the entire car fleet would be equipped with the then-current type of catalysts, the global N₂O emissions from traffic could double and become responsible for 6–32 % of the atmospheric growth rate. However, later studies suggested that N₂O traffic emissions had been decreasing (e.g. Becker et al., 2000), possibly due to improvement in catalytic technology.

Emissions of N₂O, including the ones from traffic, have to be estimated, for example for reporting to the UNFCCC. The total N₂O emitted from traffic is difficult to estimate in a bottom-up way because, at vehicle level, the N₂O emission rate depends on a multitude of factors: presence, technology and age of catalyst; driving regime and catalyst temperature (largest emissions for cold catalyst); type of fuel, presence of sulfur in fuel etc (for a detailed discussion see Lipman and Delucchi, 2002). Studies of real-world traffic that integrate emissions from a large number of vehicles are particularly useful in such a case.

1.1.5 CH₄ : CO₂ ratios

CH₄ is the second most important greenhouse gas, being responsible for about 20 % of the anthropogenic radiative forcing (Forster et al., 2007), and it is also of major importance for atmospheric chemistry. CH₄ is a good candidate for greenhouse gases emission reduction measures, in the sense that its relatively short atmospheric lifetime of about 9 yr allows observing effects of such measures on time scales of several years.

Atmospheric CH₄ increased over the past centuries from a preindustrial level of about 700 ppb to the present level of 1800 ppb (Etheridge et al., 1998; WMO, 2012), mostly due to anthropogenic emissions from rice paddies, landfills, ruminants, biomass burning and energy production. Vehicle emissions are known as a minor or even insignificant source on global scale (Nam et al., 2004). It has been shown, however, that locally, in areas with high traffic density, they can account for a larger proportion, reaching even 30 % of the total emissions (Nakagawa et al., 2005). CH₄ vehicle emissions have to be estimated and included in annual reports by the UNFCCC partners.

23557

1.1.6 O₂ : CO₂ ratios

During any burning process that produces CO₂, atmospheric O₂ is consumed, often in a fixed proportion. CO₂ and O₂ are also exchanged between the biosphere and atmosphere during photosynthesis and respiration, with a stoichiometric O₂ : CO₂ ratio assumed to be approximately –1.1 mol : mol. The O₂ : CO₂ ratios of fossil fuel burning (including road transport) and of land biosphere – atmosphere gas exchange have been used to estimate the partitioning of CO₂ uptake between land biosphere and ocean, to determine the geographical distribution of the CO₂ sink based on N-S gradients, and to distinguish contributions of various sources to short term atmospheric signals (e.g. Battle et al., 2000; Bender et al., 2005; Keeling and Shertz, 1992; Keeling et al., 1993, 1996; Manning and Keeling, 2006; Stephens et al., 2003).

The global O₂ : CO₂ ratio for fossil fuel burning was first computed by Keeling (1988) based on the chemical composition and the relative contribution of various fuel types, and updated by several other studies for different time periods; the resultant global O₂ : CO₂ ratio was around –1.4 mol : mol in all estimates. The fuel composition however may vary in space and time, and a global average cannot account for this. Manning and Keeling (2006) noted that improved estimates of the O₂ : CO₂ ratios of the source fuels are necessary for better constraining the land and oceanic carbon sinks. Recently, Steinbach et al. (2011) created a global database of O₂ : CO₂ ratios from fossil fuel burning (COFFEE) calculated from fuel composition and updated production proportions; COFFEE is an hourly resolution dataset with a grid of 1° × 1° and covers the years 1999–2008.

We are only aware of one study that aimed to determine the fossil fuel O₂ : CO₂ ratio experimentally (Keeling, 1988), through atmospheric measurements in an urban environment influenced by vehicle emissions. Our estimation of O₂ : CO₂ ratios for the road traffic is the first one based on actual measurements of traffic signals isolated from other sources or sinks, and is useful for verifying the theoretically calculated ratios and to estimate the potential variability on short time scales of hours to days.

23558

2 Methods

The Islisberg-2011 campaign had two components: (1) continuous, in-situ measurements of CO and H₂ mole fractions, and (2) flask sampling for laboratory analysis of CO₂, CO, CH₄, N₂O, SF₆, H₂, O₂/N₂, Ar/N₂, ¹³C and ¹⁸O in CO₂, ¹³C and ¹⁸O in CO, and D in H₂. The results reported here are based on the flask sample measurements.

2.1 Site description

The Islisberg highway tunnel is relatively new (2009); it is 4.6 km long and has separated tubes for the two traffic directions, each with two lanes. In normal situations it has no active ventilation, which means that the air movement through the tunnel is controlled by traffic. The average traffic through the tunnel is about 25 000–30 000 vehicles per day in each direction (slightly lower during weekend); about 85 % are personal vehicles. The speed limit is 100 km h⁻¹.

Our measurements took place in the tunnel bore that leads towards Zürich. Given the location of the tunnel it is likely that most vehicles were already warmed up, with the catalytic converters operating at optimal temperature.

Hourly traffic count data per vehicle category were obtained from the automatic traffic count network of FEDRO (Federal Roads Office) (data downloaded from www.portal-stat.admin.ch/sasvz/files/fr/03.xml).

2.2 Air sampling

Air was sampled in parallel at two locations in the same tunnel bore, close to each end of the tunnel. The “Entrance” sampling site was located inside the tunnel, about 80 m from the tunnel entrance; the “Exit” site was also inside the tunnel, about 50 m from the exit. The sampling equipment was installed in the maintenance spaces located below the traffic level. At each location, air was drawn from the traffic level via 14 mm OD, about 10 m long PTFE tubes, at a flow rate higher than 15 L min⁻¹. Air for flask

23559

samples was drawn from this main air stream via a glass distributor located before the main sampling compressor (thus the sample air did not pass through this compressor), with a flow of approx 2 L min⁻¹. The other outlets of the distributor were used for our in-situ measurements of H₂ and CO, and for other measurements made by WWEA (Office of Waste, Water, Energy and Air).

At the end of the campaign, after the WWEA measurements had ended, we removed the glass distributor and filled several flasks with air drawn directly from the tunnel without dividing the stream; this was done for testing the influence of the distributor on the O₂/N₂ values, as it is known that air stream divisions (e.g. a tee-junction) can lead to oxygen fractionation (Keeling et al., 2004). No significant difference was found between the flask sampled with and without the glass distributor.

2.3 Flask sampling

The two flask samplers that were employed used 1/4” Synflex tubing and KNF Neuberger N86 diaphragm pumps. Air was dried using stainless steel traps (20 cm long, 1” OD) filled with magnesium perchlorate, which was changed every one or two samplings. We used glass flasks equipped with PCTFE seals, made by Normag, Ilmenau: one set of 1 L flasks from IMAU (referred to in what follows as *imau*-flasks), one set of 1 L flasks from MPI-BGC (*mpi*-flasks) and one set of 2 L flasks from EMPA (*empa*-flasks).

The standard sampling procedure was as follows. At the entrance site, two flasks were installed in series, one *mpi* and one *imau* flask (the *mpi* flask was always the first after the pump). At the exit site, three flasks were filled: *mpi*, *imau* and *empa*, in this order. The flushing time was 15 min, at a flow rate of 2 L min⁻¹ and a pressure of 1.7 bar abs; the pressure was kept constant through the sampling time. The normal sampling action involved sampling at both entrance and exit site in parallel, with a delay of 15 min for the exit site. Unless otherwise specified, our analysis is based on the difference between the exit and the entrance flasks sampled in parallel. A total

23560

of 133 flask samples were filled, most of them during a 30 hours intensive sampling period on 21–22 June 2011.

2.4 Flask measurements

Different measurements were performed on the flask samples at MPI-BGC and IMAU. The *mpi* flasks were analyzed at MPI-BGC for CO₂, CH₄, N₂O, SF₆, H₂, CO, O₂/N₂, Ar/N₂, and the stable isotopes ¹³C and ¹⁸O in CO₂. The *imau* flasks were analyzed at IMAU for CO, H₂, ¹³C and ¹⁸O in CO, and D in H₂. The *empa* flasks travelled to MPI-BGC and IMAU and were analyzed for all species. The results for H₂ and its isotopic composition are not discussed in this paper.

2.4.1 Flask measurements at MPI-BGC

Two sets of flasks (the *mpi* and *empa* flasks) were analyzed at MPI-BGC as mentioned above. MPI-BGC routinely performs flask sample analyses following well established methods (Jordan and Brand, 2003; Jordan and Steinberg, 2011), thus we will only give a summary here.

CH₄, CO₂, N₂O and SF₆ were analyzed using Agilent gas chromatographs with flame ionization (FID) and electron capture detectors (ECD). Typical precisions are on the order of 0.075 % for CH₄, 0.017 % for CO₂, 0.05 % for N₂O and 0.4 % for SF₆. The mole fractions reported are traceable to WMO calibration scales (CO₂: NOAA2007 scale, CH₄: NOAA2004 scale, N₂O: NOAA2006A scale, SF₆: NOAA2006 scale). Out of the 70 flask samples analyzed, CO₂ mole fraction was above the range set by the WMO laboratory calibration standards in 38 samples and N₂O mole fraction in 9 samples. No significant extrapolation error is assumed for these extrapolated data as for CO₂ the FID is very linear, whereas N₂O mole fractions (detected with the more non-linear ECD) were not much above the calibrated range.

CO was analyzed (together with H₂) using a Reduction Gas Analyzer (RGA3, Trace Analytical), with a typical CO precision of 0.2%. CO results are traceable to the

23561

NOAA2004 scale. The calibration range covered by WMO tertiary standards at MPI-BGC extends up to 484 ppb. From the total of 70 flasks, 24 had CO mole fractions above the cut-off range of the instrument, thus could not be analyzed. Additionally, 17 flask samples had mole fractions above the calibrated range; due to the significant non-linearity of the RGA instruments, the results of these flasks are possibly affected by large errors and will not be used here.

O₂/N₂ and Ar/N₂ were analyzed with a mass spectrometric method (Brand, 2005), with a typical precision of 2 per meg for O₂/N₂ and 5 per meg for Ar/N₂ (“per meg” definition is given in Sect. 2.5). O₂/N₂ results are traceable to the SIO (Scripps Institute of Oceanography) calibration scale. Ar/N₂ results were only used in our work as a quality check, in order to detect eventual problems that could have led to O₂ fractionation (Battle et al., 2006; Keeling et al., 2004). Following this check, the results of two flasks that showed abnormal Ar/N₂ ratios were excluded from further analysis for O₂/N₂.

¹³C and ¹⁸O in CO₂ were analyzed with a mass spectrometric method (Brand et al., 2009; Ghosh et al., 2005; Werner et al., 2001), with a typical precision of 0.013 ‰ for ¹³C and 0.025 ‰ for ¹⁸O. The results are reported by MPI-BGC on the VPDB scale in case of $\delta^{13}\text{C}$ and on the VPDB-CO₂ scale in case of $\delta^{18}\text{O}$, using JRAS air as the principle anchor to the VPDB scale (JRAS = Jena Reference Air Set, Wendeborg et al., 2013). In this paper, for direct comparison with previous works and with the CO results, we converted the ¹⁸O in CO₂ data to the VSMOW scale considering that $\delta^{18}\text{O}$ (VPDB-CO₂, VSMOW) = + 41.5 ‰.

2.4.2 Flask measurements at IMAU

Two sets of flasks (the *empa* and *imau* flasks) were analyzed at IMAU for CO (and H₂) mole fractions and the stable isotopes ¹³C and ¹⁸O in CO.

CO mole fractions were measured (together with H₂) with a Peak Performer 1 RGA, using synthetic air as a carrier gas. The CO results are traceable to the NOAA2004 scale. 40 out of the 75 flasks measured had CO mole fractions above the cut-off range

23562

of the instrument and were diluted with CO-free synthetic air in order to make the analysis possible. A dilution series was produced in order to calibrate the RGA instrument over the whole measurement range (up to approx. 1000 ppb for CO), and to correct for the instrument non-linearity. Typical repeatability of the instrument, when measuring a constant gas with mole fraction in the normal atmospheric range, is better than 1% for CO. The overall uncertainty that we assigned to the CO mole fractions, accounting for the dilution and calibration errors, is 5%. Further details on the CO mole fraction measurements at IMAU are given in the Supplementary material.

^{13}C and ^{18}O in CO were measured with a continuous flow mass spectrometry system, which is described in detail in Pathirana et al. (2013). $\delta^{13}\text{C}$ and $\delta^{18}\text{O}$ values were calibrated against one calibration cylinder with a known isotopic composition (Brenninkmeijer, 1993), and are reported on the VPDB and VSMOW international scales respectively. These measurements were performed after the CO mole fraction measurements, thus after the flasks with very high CO mole fractions had been already diluted. The analytical precision (repeatability) during these measurements was estimated at 0.12‰ for $\delta^{13}\text{C}$ and 0.16‰ for $\delta^{18}\text{O}$. Additionally, based on the drift observed in the reference gas measurements, we assume a possible systematic error of the results of up to 0.2‰ in $\delta^{13}\text{C}$ and 0.1‰ in $\delta^{18}\text{O}$.

2.5 Units, conventions and calculations

Atmospheric mole fractions are given in the commonly used units of ppm (parts per million) and ppb (parts per billion); these are equivalent to the “official” $\mu\text{mol mol}^{-1}$ and nmol mol^{-1} units.

We report variations in atmospheric O_2 in terms of $\delta\text{O}_2/\text{N}_2$, as defined by Keeling and Shertz (1992):

$$\delta\text{O}_2/\text{N}_2 = \left(\frac{(\text{O}_2/\text{N}_2)_{\text{sample}}}{(\text{O}_2/\text{N}_2)_{\text{reference}}} - 1 \right)$$

23563

$\delta\text{O}_2/\text{N}_2$ values are given on the SIO scale in “per meg” units, with 1 per meg = 10^{-6} . For comparing to CO_2 on a mol mol basis, we converted the variations of O_2/N_2 ratios to ppm units, considering that a variation of 4.8 per meg is equivalent to 1 ppm.

We express all isotopic data using the common δ definition:

$$\delta X = \left(\frac{R_{\text{sample}}}{R_{\text{reference}}} - 1 \right)$$

where X is the heavy isotope of interest (^{13}C or ^{18}O), R_{sample} is the ratio between the heavy and the lightest isotopes of the species (e.g. $^{13}\text{C}/^{12}\text{C}$) in the sample air, and $R_{\text{reference}}$ is the same ratio for the reference material specific to the scale considered. The δ values are multiplied by 1000 and expressed in ‰ (permil) units. $\delta^{18}\text{O}$ values in both CO_2 and CO are given on the international scale VSMOW (Vienna Standard Mean Ocean Water). $\delta^{13}\text{C}$ values in CO_2 and CO are given on the VPDB scale (Vienna Pee Dee Belemnite).

The isotopic fractionation factor (α) for ^{13}C during CO destruction is defined as:

$$\alpha = k_{13\text{C}}/k_{12\text{C}}$$

where $k_{12\text{C}}$ and $k_{13\text{C}}$ are the rate constants for the reaction of ^{12}CO respectively ^{13}CO during the removal process. The fractionation constant (ε) is defined as:

$$\varepsilon = \alpha - 1.$$

With this definition, negative ε means that ^{13}C reacts slower than ^{12}C . In this paper we express ε in ‰ units.

The $\text{CO}:\text{CO}_2$, $\text{N}_2\text{O}:\text{CO}_2$, $\text{CH}_4:\text{CO}_2$ and $\text{O}_2:\text{CO}_2$ ratios were computed for each group of entrance – exit flasks as follows. First, for each sampling action, “entrance” and “exit” mole fractions were computed for each species, as averages of all available results from entrance respectively exit (1 to 3 results). The ratio was then computed for

23564

each sampling action as a slope of the line defined by the two points corresponding to the entrance and exit. The error for each ratio result was computed by standard error propagation at $1-\sigma$ (68 % confidence) level. Keeling plot intercepts for ^{13}C and ^{18}O in CO_2 were computed in a similar way (δ values were averaged weighted by the corresponding mole fractions).

The \pm intervals reported for the mean results are 68 % confidence intervals (CI) assuming the data normally distributed; CI are computed as one standard deviation divided by the square root of the number of data points minus one.

3 Results and discussion

3.1 Data overview

Most samples were collected during an intensive sampling period on 21–22 June, and on 25 July 2011. For an impression on data variability, we show in Fig. 1 the measurement results of the flasks sampled during 21–22 June 2011 (plots a-i), together with the traffic characteristics during the same time interval (plot j). For the quantitative results in the later sections we also include the data from 25 July. The flask data from the entrance site are shown in blue, the ones from the exit site are shown in red and, for CO, the measurement results from MPI-BGC are shown by green dots. (CO in most samples exceeded the instrument range at MPI-BGC; the IMAU dataset is more complete because the samples were diluted prior to measurement and thus they could all be analyzed).

As expected for working days, traffic peaks were observed during the morning and evening, with a total vehicle count of around 2000 vehicles per hour (Fig. 1j). These traffic peaks are due to the personal vehicles, which account for most of the traffic (about 85 %) through the day. The heavy transport has a different evolution, with relatively constant intensity over the day and a decrease around 16:00 local time, just at the start of the evening peak.

23565

The exit samples show for CO_2 , CO and N_2O much higher values and higher variability than the entrance samples, thus we can consider for these species that all the variability at the exit site is due to the traffic inside the tunnel. (The traffic influences the mole fractions both through emissions and by controlling the air flow through the tunnel.) For CO_2 and N_2O , the exit site mole fractions and the difference between the exit and entrance data seem to follow a diurnal variation, with lower values during night. This feature is not that obvious in CO mole fractions, except for the largest peak at 10:00 on 22 June. $\delta\text{O}_2/\text{N}_2$ values are as expected anti-correlated to CO_2 . Unlike the mole fractions, the isotopic composition does show a significant variability at the entrance site, which in case of ^{18}O in CO is even larger than the variability at the exit site. ^{13}C and ^{18}O in CO_2 are depleted at the exit site compared to the entrance site, while both isotopes are enriched in CO at the exit compared to the entrance. For CH_4 , most of the exit data are slightly higher than the corresponding entrance data, but the difference is small compared to the overall variability in mole fractions. This is discussed in more detail in a following paragraph. No significant traffic influence was found in the SF_6 data, thus this species is not shown and not discussed further.

The mole fractions at the exit are somewhat correlated to the traffic intensity, in the sense that they are higher during day when the traffic is more intense. Apart from this, there is no finer correlation, the mole fractions do not seem to follow the hourly evolution of traffic. For example the mole fractions do not drop at midday between the morning and evening traffic peaks, but instead a large peak can be observed in CO_2 , CO and N_2O mole fractions, with corresponding variations in O_2/N_2 and in CO_2 isotopes. None of the tracers we describe in detail in the rest of this paper showed any significant correlation with the traffic count or with the proportion of heavy duty vehicles. The explanation could be in the fact that more intense traffic results not only in higher emissions, but also in faster air flow through the tunnel, which in turn leads to a stronger dilution of emitted gases and thus partly counteracts the effect of higher emissions on the mole fractions.

23566

One issue that must be mentioned is the following. The air in the tunnel is not perfectly and instantaneously mixed, which, corroborated with the large emissions, leads to large spatial gradients, and, when sampling at a fixed point, to large temporal variations even over seconds to minutes. One consequence of this is that the air in two or three flasks installed in series and sampled at the same time is not identical, because each flask contains a different weighted average of the incoming air during the sampling time, with increasing smoothing towards the last flask. A second consequence is that this variability will introduce additional “noise” when comparing flasks sampled in parallel at the entrance and the exit of the tunnel. This noise is expected to have however a normal distribution and it should not affect the average results.

During the night, the CH₄ mole fractions at the entrance were actually higher than the ones at the exit. A possible scenario to explain this observation is that under low traffic conditions, the flow of air through the tunnel slowed down and the entrance site was influenced by the accumulation of CH₄ in the shallow night time boundary layer (outside tunnel) of gases from other sources. This influence apparently did not reach the exit site. In these conditions the entrance site could not be considered as “background” for the exit site, thus we excluded the data from this period from further analysis for all species.

3.2 CO : CO₂ emission ratios

The $\Delta\text{CO} : \Delta\text{CO}_2$ results for each parallel sampling action are plotted in Fig. 2 against time of day. CO : CO₂ emission ratios range approximately between 2 and 6 ppb : ppm, with an average of (4.15 ± 0.34) ppb : ppm. This is significantly lower than previously measured ratios for traffic, and than the overall CO : CO₂ emission ratio reported for fossil fuel combustion. Table 1 lists reported CO : CO₂ ratios for traffic emissions and for fossil fuel combustion from previous studies. Of particular interest is a comparison of our results with the ones of Vollmer et al. (2007), who performed measurements in 2004–2005 in another highway tunnel in the same region of Switzerland. Our CO : CO₂ ratios are roughly half the value of those from 2004. Although other factors may have

23567

a small contribution (differently sloping tunnels; different seasons), the observed difference in CO : CO₂ ratios shows a significant decrease in vehicle CO emissions which likely reflects the technological improvement of vehicles in the actual fleet over 7 yr.

It has been shown that gasoline vehicles emit much larger quantities of CO during the cold start phase (when the catalyst is not yet working at optimal temperature), and that these cold start emissions and the CO : CO₂ ratios strongly increase for very low ambient temperatures (Weilenmann et al., 2009). Our estimate is representative for fluent highway traffic, and does not include cold start conditions, or other driving regimes where CO : CO₂ ratios could be different, likely higher. The same applies, however, to the results of Vollmer et al. (2007), thus we can safely compare the results and conclude that CO : CO₂ ratios have been decreasing between 2004 and 2011. For an overall estimate of traffic related CO : CO₂ ratios, other traffic conditions must be taken into account.

3.3 CO₂ isotopes

CO₂ isotopic ratios are clearly anti-correlated to the CO₂ mole fractions, and both ¹³C and ¹⁸O are depleted at the tunnel exit compared to the entrance (Fig. 1). ¹³C and ¹⁸O of CO₂ at the exit are a mixture of the isotopic composition of the traffic emitted CO₂ and the isotopic composition of the “background” CO₂ (typical values for $\delta^{18}\text{O}$ and $\delta^{13}\text{C}$ in background CO₂ are +41 ‰ VSMOW and –8 ‰ VPDB respectively). In order to estimate the isotopic signature of the fuel derived CO₂ and its variability, we employed the Keeling plot approach for each entrance-exit pair of results, that is, we computed the slope of the isotopic variation versus variation in the inverse of CO₂ mole fraction ($1/\text{CO}_2$). The resulting isotope signatures are shown in Fig. 3 versus time of day; samples from different days are distinguished by color.

The average isotopic signature is (-28.49 ± 0.04) ‰ for $\delta^{13}\text{C}$ and $(+23.57 \pm 0.13)$ ‰ for $\delta^{18}\text{O}$. By computing a Keeling plot intercept separately for each sampling action (and not for all data together) we minimize the influence of

23568

isotopic variability of the air entering the tunnel, which is otherwise not negligible (see Fig. 1).

The ^{13}C signature has to represent the average isotopic composition of the fuel burnt, since fuel is the major source of C in CO_2 , and almost all C in fuel is combusted to CO_2 .

5 The average $\delta^{18}\text{O}$ value is close to the $\delta^{18}\text{O}$ of atmospheric O_2 ($+23.88 \pm 0.02$)‰ VSMOW, Barkan and Luz, 2005). The small difference of 0.3‰ is significant at the 3% confidence level. The range of variability in our $\delta^{18}\text{O}$ signature values is relatively large, and larger than the computed uncertainty in the individual Keeling plot intercept values. Taking into account that each of our data
10 points represents the integrated influence of many vehicles, we can assume that the variability of $\delta^{18}\text{O}$ in CO_2 from individual emitters is even larger.

Several recent studies suggested that CO_2 emitted from vehicles could have a different isotopic composition than atmospheric O_2 . Affek and Eiler (2006) sampled tail pipe and exhaust air from two vehicles, and found an average $\delta^{18}\text{O}$ signature of $+29.9$ ‰,
15 which is by 6‰ enriched compared to the atmospheric O_2 . They explained this value by isotopic equilibration between CO_2 and water vapor at a temperature of 200°C . Schumacher et al. (2011) analyzed the exhaust of several vehicles and obtained variable $\delta^{18}\text{O}$ values in the range $+22.2$ to $+29.6$ ‰, thus both depleted and enriched relative to the atmospheric O_2 . Horvath et al. (2012) analyzed the exhaust CO_2 of
20 one gasoline vehicle, and found a 9‰ enrichment in $^{18}\text{O}\text{-CO}_2$ compared to the atmospheric O_2 ; they suggest the cause could be isotopic exchange between CO_2 and liquid or gaseous water.

Partial equilibration of CO_2 with water in the tail pipe at different temperatures is possibly one of the causes of variability in the $\delta^{18}\text{O}$ of CO_2 emitted. Two of the studies
25 mentioned above suggested that CO_2 thermodynamically equilibrates with water in the vehicle catalyst or exhaust. However, the thermodynamic equilibration would always lead to ^{18}O enrichment in CO_2 compared to water (Friedman and O'Neil, 1977 and references therein). When the only oxygen source for both water and CO_2 is atmospheric O_2 , and the supplied oxygen is consumed completely (most modern vehicle

23569

are set to run near the stoichiometric equilibrium), enrichment of CO_2 relative to water implies enrichment in CO_2 relative to the source oxygen. We do not observe a systematic enrichment in our CO_2 results relative to the atmospheric O_2 , which suggests that the thermodynamic equilibration of CO_2 with water is not the dominant process
5 that influences the final CO_2 isotopic composition. As the catalytic chemistry is quite complex, it is possible that other reactions involving oxygen influence the final $\delta^{18}\text{O}$ in CO_2 , depending on catalyst type, temperature, other chemical species present etc.

The studies mentioned above show a large variability in the $\delta^{18}\text{O}$ of CO_2 from individual vehicles, and our results (which represent the integrated signals of a large
10 number of emitters) are consistent with this. It follows that the results from only one or several vehicles cannot be considered to represent the general behavior of ^{18}O in traffic emitted CO_2 . Such studies are useful for understanding the processes, while our approach leads to results that are more representative for the integrated traffic emissions to the atmosphere. In summary, we find a large variability in the $\delta^{18}\text{O}$ of traffic
15 CO_2 , and only a small average deviation of 0.3‰ relative the $\delta^{18}\text{O}$ of atmospheric O_2 .

3.4 CO isotopes

In the case of CO, the mole fractions at the tunnel exit are a few tens of times larger than the ones at the entrance, thus we can consider that essentially all CO observed
20 at the exit is produced by traffic. In this case we estimate the traffic signature directly from the exit site data, without using the Keeling plot approach. Figure 4 shows the $\delta^{13}\text{C}$ and $\delta^{18}\text{O}$ in CO, with the entrance and exit data shown in different colors. In the absence of fractionation, the ^{13}C isotopic composition should be the one of the fuel burnt, and the ^{18}O isotopic composition should derive from atmospheric O_2 .

$\delta^{13}\text{C}$ in CO at the tunnel exit is consistently enriched compared to the $\delta^{13}\text{C}$ value of the fuel of (-28.49 ± 0.06) ‰ as estimated from the $\delta^{13}\text{C}$ in CO_2 (assuming that ^{13}C in
25 CO_2 represents the composition of the fuel, see previous section). The average $\delta^{13}\text{C}$ in CO for the exit site is (-25.6 ± 0.2) ‰.

23570

For $\delta^{13}\text{C}$ there is a subset of data that stands out of the general trend, with CO more enriched in ^{13}C . These are the data with the lowest CO mole fractions from the tunnel exit. This suggests that the enrichment in ^{13}C in CO could take place not during the CO formation, but during its subsequent destruction. Fig. 5 shows $\delta^{13}\text{C}$ in CO at the exit site, averaged for each sampling action, plotted against the CO : CO₂ ratio of the same groups of flasks. Although quite noisy, a tendency is evident of higher $\delta^{13}\text{C}$ values for flasks that have a lower CO : CO₂ ratio.

^{13}C enrichment during CO destruction has been observed before by Tsunogai et al. (2003), who tested individual engines in various running and idling conditions. A similar phenomenon is documented for other gas species emitted by vehicles with catalyst, like N₂O (Toyoda et al., 2008), CH₄ (Chanton et al., 2000; Nakagawa et al., 2005) and H₂ (Vollmer et al., 2010). Although CO destruction takes place both in the engine and in the catalyst, it is most likely that the ^{13}C enrichment mainly happens in the catalyst, since it has not been observed in case of vehicles without a catalyst (Tsunogai et al., 2003).

Our data allow estimating a Rayleigh fractionation constant for the supposed CO destruction. We assume for this that CO is produced in the engine with a constant CO : CO₂ ratio $R_{\text{CO-CO}_2}$, thus we can compute for each sampling action the CO produced (CO_{prod}) as:

$$\text{CO}_{\text{prod}} = \Delta\text{CO}_2 \times R_{\text{CO-CO}_2},$$

where ΔCO_2 is the difference between the CO₂ at the entrance and at the exit of the tunnel. The ratio between the CO we measured and the calculated CO_{prod} is then the CO fraction remaining after removal by the catalyst. For removal with isotopic fractionation constant ε of CO, the following equation is valid:

$$\ln(1 + \delta^{13}\text{C}) = \varepsilon \times \ln\left(\frac{\text{CO}_{\text{meas}}}{\text{CO}_{\text{prod}}}\right) + \text{const}$$

23571

The fractionation constant ε can be computed as a slope of $\ln(1 + \delta^{13}\text{C})$ versus $\ln(\text{CO}_{\text{meas}}/\text{CO}_{\text{prod}})$, as shown in Fig. 5b. We obtained a fractionation constant ε of $(-2.7 \pm 0.7)\text{‰}$, equivalent to a fractionation factor α of 0.9973. The result does not significantly depend on the $R_{\text{CO-CO}_2}$ ratios that we consider. Note that our assumption of constant CO : CO₂ ratios after combustion in the engine is quite strong, thus this fractionation result should be taken with caution. However, our result is surprisingly close to the one of Tsunogai et al. (2003), who calculated a fractionation constant of -2.6‰ for gasoline vehicles equipped with catalyst (their calculation implies the same assumption of constant CO : CO₂ produced).

$\delta^{18}\text{O}$ in CO values at the exit site, shown in Fig. 4b, are quite variable, similarly to ^{18}O in CO₂, and have an average of $(+24.1 \pm 0.2)\text{‰}$. This value is not statistically different from the $\delta^{18}\text{O}$ of atmospheric O₂ ($+23.88\text{‰}$), considering the 0.2‰ random error and the potential systematic error of 0.1‰ in our ^{18}O in CO measurements (as mentioned in Sect. 2.4). ^{18}O in CO seems however slightly enriched compared to the ^{18}O in CO₂ ($+23.57\text{‰}$). Unlike the $\delta^{13}\text{C}$, the exit site $\delta^{18}\text{O}$ values do not depend on CO mole fractions, thus they are not significantly affected during the CO destruction in the catalytic converter.

Previous studies reported enrichment in ^{18}O in CO for gasoline vehicles with a functioning catalyst, and depletion in ^{18}O for vehicles without a catalyst, for vehicles with catalyst during a cold start (when the catalyst is not yet functioning efficiently), and for diesel vehicles (e.g. Huff and Thiemens, 1998; Kato et al., 1999a; Tsunogai et al., 2003). Our result integrates the emissions of many vehicles with potentially contrary effects, and the large variability in ^{18}O results show that individual emitters could have very different signatures.

In summary, our fleet averaged results show net enrichment in ^{13}C relative to fuel, and no significant difference in ^{18}O relative to atmospheric O₂. For comparison, we show in Fig. 6 our results together with results of several previous studies that reported CO isotopic composition for the entire fleet, and separately for gasoline and diesel vehicles.

23572

Part of the differences in ^{13}C among studies can probably be explained by the different isotopic composition of the fuel. The results of our study and of Tsunogai et al. (2003) (Japan fleet, 2000) are similar and show the highest $\delta^{13}\text{C}$ values for fleet averages; in addition, both studies find a ^{13}C enrichment phenomenon during catalytic CO destruction. This could be thus a characteristic of modern vehicles and could probably be related to the efficiency of catalytic destruction. Our ^{18}O results are very close to the ones of Tsunogai et al. (2003) and Stevens et al. (1972) (world average, 1971), but differ significantly from the estimate of Kato et al. (1999a) (German fleet, 1997).

As gasoline and diesel vehicles were reported to emit CO with very different isotopic signatures, the isotope values measured for the entire fleet could in principle be used to determine the relative emissions from gasoline and diesel vehicles. In the two studies shown in Fig. 6 that include separate estimates per fuel type, the fleet averages tend to be closer to the gasoline signatures, which show a larger share of gasoline emissions in the total CO. It would be useful to determine the share of gasoline and diesel CO emissions for the present fleet, if data on isotopic signatures of recent vehicles became available.

Modeling studies that include the isotopic composition of CO (Bergamaschi et al., 2000; Manning et al., 1997) have used until now, for the traffic emitted CO, the $\delta^{13}\text{C}$ and $\delta^{18}\text{O}$ values of fuel respectively atmospheric O_2 . Our study adds to the already existing evidence that significant fractionation can occur during the formation and subsequent destruction of CO, and that the traffic signatures can vary with time and place. Better characterizing these signatures through additional measurements, and updating the information used in models would help constraining the CO budget.

3.5 $\text{N}_2\text{O} : \text{CO}_2$ emission ratios

Figure 7 shows the $\Delta\text{N}_2\text{O} : \Delta\text{CO}_2$ ratios for the mole fraction differences of groups of exit-entrance flasks sampled at the same time; the average ratio is $(1.8 \pm 0.2) \times 10^{-2}$ ppb : ppm (equivalent for $\text{N}_2\text{O} : \text{CO}_2$ to mg : g). The results exhibit a

23573

wide spread, with an upper limit of about 3×10^{-2} ppb : ppm. The $\text{N}_2\text{O} : \text{CO}_2$ ratios seem to vary with the time of day and it is interesting to note that samples taken on different dates at about the same hour tend to give comparable results. However no significant correlation was found with any of the traffic parameters available.

Table 2 summarizes results of traffic $\text{N}_2\text{O} : \text{CO}_2$ emission ratios from several previous studies. Our results are obviously lower than all the previous ones, and it can be observed that the $\text{N}_2\text{O} : \text{CO}_2$ ratios in Europe decreased monotonously over the past 20 yr. Since in general the emission of CO_2 per kilometer decreased, the N_2O emission rate per kilometer traveled has decreased even more during this period than the $\text{N}_2\text{O} : \text{CO}_2$ ratio.

After the introduction of catalytic converters, it had been observed that vehicles fitted with a catalyst emitted more N_2O than older vehicles without a catalyst. N_2O is formed at relatively low catalyst temperatures as an intermediate in nitrogen oxides reduction. The concern appeared that the quantity of N_2O emitted by traffic would increase with the increasing proportion of catalyst vehicles (e.g. Berges et al., 1993; Dasch, 1992). Our study clearly does not support this concern, on the contrary we find for the present fleet significantly lower $\text{N}_2\text{O} : \text{CO}_2$ emission ratios than reported in the past. This is in line with the decreasing trend already observed from the study of Becker et al. (2000), when compared to the older ones. We assume that with improving catalytic technology, less N_2O is produced and a larger proportion of N_2O is completely reduced.

The following issue may affect our $\text{N}_2\text{O} : \text{CO}_2$ emission ratio estimate. N_2O can be formed inside containers from NO_x , in the presence of water and SO_2 , with a time constant for N_2O formation on the order of hours; for dried samples the effect is smaller but is still present (Muzio et al., 1989). Since NO_x , SO_2 and water are present in vehicle emissions and consequently increased in the tunnel atmosphere, it is possible that part of the N_2O excess we observed is not directly emitted by vehicles, but formed later either in the tunnel or inside the glass flasks during the few months' storage. In this case our estimate is a sum of direct and indirect traffic emissions in tunnel conditions.

23574

If N_2O resulted from NO_x makes a significant proportion, then in open air conditions the total traffic resulted N_2O may be even lower than our estimate.

3.6 CH_4 : CO_2 emission ratios

As already mentioned, the variability in the CH_4 mole fractions of the air entering the tunnel is large compared to the traffic signal (see Fig. 1). Thus, for the ΔCH_4 : ΔCO_2 ratios, we only used the afternoon data, when the CH_4 variability at the entrance was smallest, because we considered that the other data would give unreliable CH_4 : CO_2 emission ratio results. This leaves us with only seven data points for the CH_4 : CO_2 emission ratios (not shown in figures); the average ΔCH_4 : ΔCO_2 ratio is $(4.6 \pm 0.2) \times 10^{-2}$ ppb : ppm.

It is general knowledge that vehicles emit small quantities of methane, and (indirect) measurements of methane are included in certification vehicle testing, but we are not aware of comprehensive studies focusing on the recent European vehicle fleet. We can compare our results to the ones of Nam et al. (2004), who performed measurements on US vehicles of model years 1995 to 1999. For hot running vehicles, they obtained an average ΔCH_4 : ΔCO_2 ratio of 3.8×10^{-2} ppb : ppm, which is close to our result. Their overall result that includes cold start emissions is much larger (14×10^{-2} ppb : ppm); this supports that, for estimating the overall traffic CH_4 : CO_2 emission ratios, other traffic conditions must be taken into account.

Nakagawa et al. (2005) estimated the contribution of traffic emissions to the total CH_4 fluxes to be up to 30 % in a Japanese large urban area (based on isotope measurements). In our case it is obvious that the mole fraction increase due to traffic emissions (represented by the difference between the tunnel exit and entrance) is small compared to the overall variability, thus the traffic emissions account for a much smaller proportion of the total CH_4 fluxes.

23575

3.7 O_2 : CO_2 ratios

As obvious in Fig. 1, variations in O_2/N_2 ratios are anti-correlated to the CO_2 variations. Figure 8 shows the ΔO_2 : ΔCO_2 ratios computed from groups of exit-entrance flasks sampled in parallel. All ΔO_2 : ΔCO_2 ratios lie within the narrow interval -1.48 to -1.46 , with an average of -1.47 ± 0.01 ppm : ppm.

Overall our ΔO_2 : ΔCO_2 results are similar to the ratios of approximately -1.5 calculated theoretically based on fuel composition by Steinbach et al. (2011) for this region. We note that the oxidative ratios from Steinbach et al. (2011) include other fossil fuel burning processes, not only road traffic.

Interestingly, our ΔO_2 : ΔCO_2 ratios are also very close to the average reduction level (or oxidative ratio) of the fuel burnt of 1.5 ± 0.06 obtained by Keeling (1988), based on O_2 and CO_2 simultaneous measurements in an urban atmosphere dominated by traffic. For determining the reduction level, Keeling (1988) corrected the measured ΔO_2 : ΔCO_2 ratios assuming that a proportion of $(8.5 \pm 8.5)\%$ of the carbon in fuel is emitted as CO. With the actual technology in Europe, a much smaller proportion of the fuel is burnt to CO (see section 3.2), thus we can consider that the ΔO_2 : ΔCO_2 ratios we obtained directly represent the reduction level of the fuel burnt, without a correction being necessary.

4 Summary and final remarks

The main results of our paper can be summarized as follows.

- a. The $\text{CO}:\text{CO}_2$ emission ratios, with an average of (4.15 ± 0.34) ppb : ppm, are lower than the ratios presently available from databases and used in models, and than older experimental estimates. This is probably due to the evolution of the vehicle fleet associated to the evolution of vehicle emission standards. The $\text{CO}:\text{CO}_2$ emission ratio is likely to continue decreasing in the future, as older ve-

23576

ehicles are replaced by new ones, thus it will have to be continuously updated if used for estimating the fossil fuel CO₂.

- 5 b. According to our measurements, the $\delta^{18}\text{O}$ in traffic emitted CO₂ has an average value of +23.6‰, and thus is depleted by 0.3‰ relative to the atmospheric O₂. The variability of our $\delta^{18}\text{O}$ -CO₂ data suggests the possibility that individual vehicles do emit CO₂ with different $\delta^{18}\text{O}$ signatures, which is in line with measurements of individual vehicles in other studies. However, our results do not show a large systematic deviation in $\delta^{18}\text{O}$ -CO₂ at fleet level.
- 10 c. $\delta^{13}\text{C}$ in CO is enriched by 3‰ compared to the isotopic composition of the fuel, and its variability seems to be dominated by a destruction phenomenon in the catalyst, with highest $\delta^{13}\text{C}$ values associated to low CO : CO₂ emission ratios. For $\delta^{13}\text{C}$ we compute a fractionation constant ϵ of (-2.7 ± 0.7) ‰ for the catalytic CO oxidation. $\delta^{18}\text{O}$ in CO is similar within the uncertainty to the isotopic composition of atmospheric O₂, and, unlike $\delta^{13}\text{C}$, is not correlated to the CO : CO₂ emission ratios. A potential application of integrated fleet measurements of CO isotopic composition is to estimate the relative contribution of emissions from gasoline and diesel vehicles; for this, more knowledge on the isotopic signature of CO emitted from recent vehicles is necessary.
- 15 d. The N₂O : CO₂ emission ratios of $(1.8 \pm 0.2) \times 10^{-2}$ ppb : ppm are lower than older estimates, suggesting a decrease in N₂O emissions with improving technology. The concern that N₂O emissions will increase with the proportion of vehicles fitted with catalyst converters is not supported by our results. It is possible that the technological improvements will lead to an even further decrease in traffic N₂O emissions.
- 20 e. We find an average CH₄ : CO₂ emission ratio of $(4.6 \pm 0.2) \times 10^{-2}$ ppb : ppm. Our results confirm that the traffic CH₄ source is small compared to the other emissions.
- 25

23577

- f. The ΔO_2 : ΔCO_2 ratios from traffic emissions of (-1.47 ± 0.01) ppm : ppm are very close to previous theoretical and experimental estimates.

The main limitations of our study are: (1) The fleet composition in the Isisbergtunnel during our campaign may be different from the fleet composition in other locations in Europe, and not fully representative for the overall European fleet. Thus our results may not be representative for different places and times, and an upscaling of our results to the entire West Europe must be done with caution. (2) The tunnel has a highway driving regime and the traffic was fluent during our measurement campaign. In different traffic conditions, like in urban areas or during traffic jams, emissions and the ratios between the emitted species are likely to be different. Emission rates reported for such cases are usually higher.

5

10

We recommend:

- a periodical update of CO : CO₂ emission ratios if they are to be used for quantifying fossil fuel contributions;
- 15 – further studies on the possibility of using CO isotopes to distinguish between emission sources, and the possibilities of combining this with other tracers; for this purpose more information is needed on the isotopic signatures of CO sources and sinks;
- more studies characterizing the isotopic signature of traffic (and other fossil fuel) derived CO₂ to address the discrepancy between modeling studies that assume that burning processes occur without significant fractionation, and measurements that find fractionation induced alterations of CO₂ isotopic signatures;
- 20 – complementary studies for estimating traffic emissions in different conditions that are necessary to complete the picture: locations with different fleet composition, traffic type (e.g. city or traffic jams), and atmospheric conditions (e.g. different temperatures during winter);
- 25

23578

- increasing the number of atmospheric oxygen measurements and testing new possibilities to use oxygen data for distinguishing between sources and sinks, making use of the well defined O₂ : CO₂ ratios for certain combustion processes.

Supplementary material related to this article is available online at

5 <http://www.atmos-chem-phys-discuss.net/13/23549/2013/acpd-13-23549-2013-supplement.zip>.

Acknowledgements. The authors would like to thank for support during sampling and measurements to the following colleagues: Michel Bolder and Carina van der Veen (IMAU), Matz Hill (EMPA), Bert Steinberg and Juergen Richter (MPI-BGC).

10 We thank Urs Schaufelberger and Markus Meier (AWEL/WWEA) for sharing their sampling lines and for general support.

The travel of M. E. Popa to Switzerland for the sampling campaign has been financially supported by the European Science Foundation (ESF), in the framework of the Research Networking Programme TTORCH. The measurements of flask samples at MPI-BGC were funded by the
15 FP6 project IMECC, Transnational Access Activity TA1. This work has received additional support from the NWO projects 053.61.026 and 865.07.001 and from the EU project INTRAMIF.

We thank Hans Coops for useful comments on the manuscript.

References

- Affek, H. P. and Eiler, J. M.: Abundance of mass 47 CO₂ in urban air, car exhaust, and human
20 breath, *Geochim. Cosmochim. Ac.*, 70, 1–12, doi:10.1016/j.gca.2005.08.021, 2006.
- Andreae, M. O. and Merlet, P.: Emission of trace gases and aerosols from biomass burning, *Global Biogeochem. Cy.*, 15, 955–966, doi:10.1029/2000GB001382, 2001.
- Angelbratt, J., Mellqvist, J., Simpson, D., Jonson, J., Blumenstock, T., Borsdorff, T., Duchatelet, P., Forster, F., Hase, F., and Mahieu, E.: Carbon monoxide (CO) and ethane (C₂H₆)

23579

- trends from ground-based solar FTIR measurements at six European stations, comparison and sensitivity analysis with the EMEP model, *Atmos. Chem. Phys.*, 11, 9253–9269, doi:10.5194/acp-11-9253-2011, 2011.
- Barkan, E. and Luz, B.: High precision measurements of ¹⁷O/¹⁶O and ¹⁸O/¹⁶O ratios in H₂O,
5 *Rapid Commun. Mass Sp.*, 19, 3737–3742, doi:10.1002/rcm.2250, 2005.
- Battle, M., Bender, M. L., Tans, P. P., White, J. W. C., Ellis, J. T., Conway, T., and Francey, R. J.: Global carbon sinks and their variability inferred from atmospheric O₂ and δ¹³C, *Science*, 287, 2467–2470, doi:10.1126/science.287.5462.2467, 2000.
- Battle, M., Fletcher, S. M., Bender, M. L., Keeling, R. F., Manning, A. C., Gruber, N., Tans, P. P.,
10 Hendricks, M. B., Ho, D. T., and Simonds, C.: Atmospheric potential oxygen: New observations and their implications for some atmospheric and oceanic models, *Global Biogeochem. Cy.*, 20, GB1010, doi:10.1029/2005GB002534, 2006.
- Becker, K. H., Lörzer, J. C., Kurtenbach, R., Wiesen, P., Jensen, T. E., and Wallington, T. J.: Contribution of vehicle exhaust to the global N₂O budget, *Chemosphere – Global Change Sci.*, 2, 387–395, doi:10.1016/S1465-9972(00)00017-9, 2000.
- Bender, M. L., Ho, D. T., Hendricks, M. B., Mika, R., Battle, M. O., Tans, P. P., Conway, T. J., Sturtevant, B., and Cassar, N.: Atmospheric O₂/N₂ changes, 1993–2002: Implications for the partitioning of fossil fuel CO₂ sequestration, *Global Biogeochem. Cy.*, 19, GB4017, doi:10.1029/2004GB002410, 2005.
- 20 Bergamaschi, P., Hein, R., Brenninkmeijer, C. A. M., and Crutzen, P. J.: Inverse modeling of the global CO cycle, 2. Inversion of ¹³C/¹²C and ¹⁸O/¹⁶O isotope ratios, *J. Geophys. Res.*, 105, 1929–1946, doi:10.1029/1999JD900819, 2000.
- Berges, M. G. M., Hofmann, R. M., Scharffe, D., and Crutzen, P. J.: Nitrous oxide emissions from motor vehicles in tunnels and their global extrapolation, *J. Geophys. Res. Atmos.*, 98, 18527–18531, doi:10.1029/93jd01637, 1993.
- 25 Bishop, G. A. and Stedman, D. H.: A decade of on-road emissions measurements, *Environ. Sci. Technol.*, 42, 1651–1656, doi:10.1021/es702413b, 2008.
- Bradley, K. S., Brooks, K. B., Hubbard, L. K., Popp, P. J., and Stedman, D. H.: Motor vehicle fleet emissions by OP-FTIR, *Environ. Sci. Technol.*, 34, 897–899, doi:10.1021/es9909226, 2000.
- 30 Brand, W. A.: O₂/N₂ storage aspects and open split mass spectrometric determination, in: Proceedings of the 12th IAEA/WMO meeting of CO₂ experts, Toronto, Sept. 2003, edited by: Worthy, D. and Huang, L., WMO-GAW Report 161, 146–151, 2005.

23580

- Brand, W. A., Huang, L., Mukai, H., Chivulescu, A., Richter, J. M., and Rothe, M.: How well do we know VPDB? Variability of $\delta^{13}\text{C}$ and $\delta^{18}\text{O}$ in CO_2 generated from NBS19-calcite., *Rapid Commun. Mass Sp.*, 23, 915–926, doi:10.1002/rcm.3940, 2009.
- Brenninkmeijer, C. A. M.: Measurement of the abundance of ^{14}C in the atmosphere and the $^{13}\text{C}/^{12}\text{C}$ and $^{18}\text{O}/^{16}\text{O}$ ratio of atmospheric CO with applications in New Zealand and Antarctica, *J. Geophys. Res.*, 98, 10595–10614, 0148-0227/93/93JD-00587, 1993.
- Cant, N. W., Angove, D. E., and Chambers, D. C.: Nitrous oxide formation during the reaction of simulated exhaust streams over rhodium, platinum and palladium catalysts, *Appl. Catal. B-Environ.*, 17, 63–73, doi:10.1016/S0926-3373(97)00105-7, 1998.
- Chanton, J. P., Rutkowski, C. M., Schwartz, C. C., Ward, D. E., and Boring, L.: Factors influencing the stable carbon isotopic signature of methane from combustion and biomass burning, *J. Geophys. Res.- Atmos.*, 105, 1867–1877, doi:10.1029/1999jd900909, 2000.
- Ciais, P., Denning, A. S., Tans, P. P., and Berry, J. A.: A three-dimensional synthesis study of in atmospheric CO_2 , *J. Geophys. Res.*, 102, 5857–5872, doi:10.1029/96JD02360, 1997.
- Cuntz, M., Ciais, P., Hoffmann, G., and Knorr, W.: A comprehensive global three-dimensional model of $\delta^{18}\text{O}$ in atmospheric CO_2 : 1. Validation of surface processes, *J. Geophys. Res.- Atmos.*, 108, doi:10.1029/2002jd003153, 2003.
- Dasch, J. M.: Nitrous Oxide Emissions from Vehicles, *J. Air Waste Manage.*, 42, 63–67, doi:10.1080/10473289.1992.10466971, 1992.
- Etheridge, D. M., Steele, L. P., Francey, R. J., and Langenfelds, R. L.: Atmospheric methane between 1000 A.D. and present: Evidence of anthropogenic emissions and climatic variability, *J. Geophys. Res.- Atmos.*, 103, 15979-15993, doi:10.1029/98jd00923, 1998.
- Farquhar, G. D., Lloyd, J., Taylor, J. A., Flanagan, L. B., Syvertsen, J. P., Hubick, K. T., Wong, S. C., and Ehleringer, J. R.: Vegetation effects on the isotope composition of oxygen in atmospheric CO_2 , *Nature*, 363, 439–443, doi:10.1038/363439a0, 1993.
- Flückiger, J., Monnin, E., Stauffer, B., Schwander, J., Stocker, T. F., Chappellaz, J., Raynaud, D., and Barnola, J. M.: High-resolution Holocene N_2O ice core record and its relationship with CH_4 and CO_2 , *Global Biogeochem. Cy.*, 16, 1010, doi:10.1029/2001GB001417, 2002.
- Forster, P., Ramaswamy, V., Artaxo, P., Berntsen, T., Betts, R., Fahey, D. W., Haywood, J., Lean, J., Lowe, D. C., Myhre, G., Nganga, J., Prinn, R., Raga, G., Schultz, M., and Van Dorland, R.: Changes in Atmospheric Constituents and in Radiative Forcing, in: *Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*, edited by: Solomon, S., Qin, D.,

23581

- Manning, M., Chen, Z., Marquis, M., Averyt, K. B., Tignor, M., and Miller, H. L., Cambridge University Press, Cambridge, UK, 2007.
- Francey, R. J. and Tans, P. P.: Latitudinal variation in oxygen-18 of atmospheric CO_2 , *Nature*, 327, 495–497, doi:10.1038/327495a0, 1987.
- Friedman, I. and O'Neil, J. R.: *Compilation of stable isotope fractionation factors of geochemical interest*, USGPO, 1977.
- Gamnitzer, U., Karstens, U., Kromer, B., Neubert, R. E. M., Meijer, H. A. J., Schroeder, H., and Levin, I.: Carbon monoxide: A quantitative tracer for fossil fuel CO_2 ?, *J. Geophys. Res.- Atmos.*, 111, D22302, doi:10.1029/2005jd006966, 2006.
- Ghosh, P., Patecki, M., Rothe, M., and Brand, W. A.: Calcite- CO_2 mixed into CO_2 -free air: a new CO_2 -in-air stable isotope reference material for the VPDB scale., *Rapid Commun. Mass Sp.*, 19, 1097–1119, 2005.
- Granier, C., Bessagnet, B., Bond, T., D'Angiola, A., Denier van der Gon, H., Frost, G., Heil, A., Kaiser, J., Kinne, S., Klimont, Z., Kloster, S., Lamarque, J.-F., Lioussé, C., Masui, T., Meleux, F., Mieville, A., Ohara, T., Raut, J.-C., Riahi, K., Schultz, M., Smith, S., Thompson, A., Aardenne, J., Werf, G., and Vuuren, D.: Evolution of anthropogenic and biomass burning emissions of air pollutants at global and regional scales during the 1980–2010 period, *Clim. Change*, 109, 163–190, doi:10.1007/s10584-011-0154-1, 2011.
- Graven, H. D., Stephens, B. B., Guilderson, T. P., Campos, T. L., Schimel, D. S., Campbell, J. E., and Keeling, R. F.: Vertical profiles of biospheric and fossil fuel-derived CO_2 and fossil fuel CO_2 : CO ratios from airborne measurements of $\Delta^{14}\text{C}$, CO_2 and CO above Colorado, USA, *Tellus B*, 61, 536–546, doi:10.1111/j.1600-0889.2009.00421.x, 2009.
- Gruber, N., and Keeling, C. D.: An improved estimate of the isotopic air-sea disequilibrium of CO_2 : Implications for the oceanic uptake of anthropogenic CO_2 , *Geophys. Res. Lett.*, 28, 555–558, doi:10.1029/2000GL011853, 2001.
- Horvath, B., Hofmann, M. E. G., and Pack, A.: On the triple oxygen isotope composition of carbon dioxide from some combustion processes, *Geochim. Cosmochim. Ac.*, 95, 160–168, doi:10.1016/j.gca.2012.07.021, 2012.
- Huff, A. K. and Thiemens, M. H.: $^{17}\text{O}/^{16}\text{O}$ and $^{18}\text{O}/^{16}\text{O}$ isotope measurements of atmospheric carbon monoxide and its sources, *Geophys. Res. Lett.*, 25, 3509–3512, doi:10.1029/98GL02603, 1998.
- Jimenez, J. L., McManus, J. B., Shorter, J. H., Nelson, D. D., Zahniser, M. S., Koplów, M., McRae, G. J., and Kolb, C. E.: Cross road and mobile tunable infrared laser measurements

23582

- of nitrous oxide emissions from motor vehicles, *Chemosphere – Global Change Sci.*, 2, 397–412, doi:10.1016/S1465-9972(00)00019-2, 2000.
- Jordan, A. and Brand, W. A.: Technical Report: MPI-BGC, Germany, in: Proceedings of the 11th IAEA/WMO meeting of CO₂ experts, Tokyo, Sept. 2001, edited by: Toru, S., WMO-GAW Report 148, 149–153, 2003.
- Jordan, A. and Steinberg, B.: Calibration of atmospheric hydrogen measurements, *Atmos. Meas. Tech.*, 4, 509–521, doi:10.5194/amt-4-509-2011, 2011.
- Kato, S., Akimoto, H., Braunlich, M., Rockmann, T., and Brenninkmeijer, C. A. M.: Measurements of stable carbon and oxygen isotopic compositions of CO in automobile exhausts and ambient air from semi-urban Mainz, Germany, *Geochem. J.*, 33, 73–77, 10.2343/geochemj.33.73, 1999a.
- Kato, S., Akimoto, H., Rockmann, T., Braunlich, M., and Brenninkmeijer, C. A. M.: Stable isotopic compositions of carbon monoxide from biomass burning experiments, *Atmos. Environ.*, 33, 4357–4362, doi:10.1016/S1352-2310(99)00243-5, 1999b.
- Keeling, R. F.: Measuring Correlations between Atmospheric Oxygen and Carbon Dioxide Mole Fractions: a Preliminary Study in Urban Air, *J. Atmos. Chem.*, 7, 153–176, doi:10.1007/Bf00048044, 1988.
- Keeling, R. F. and Shertz, S. R.: Seasonal and interannual variations in atmospheric oxygen and implications for the global carbon cycle, *Nature*, 358, 723–727, doi:10.1038/358723a0, 1992.
- Keeling, R. F., Najjar, R. P., Bender, M. L., and Tans, P. P.: What atmospheric oxygen measurements can tell us about the global carbon cycle, *Global Biogeochem. Cy.*, 7, 37–67, doi:10.1029/92gb02733, 1993.
- Keeling, R. F., Piper, S. C., and Heimann, M.: Global and hemispheric CO₂ sinks deduced from changes in atmospheric O₂ concentration, *Nature*, 381, 218–221, doi:10.1038/381218a0, 1996.
- Keeling, R. F., Blaine, T., Paplawsky, B., Katz, L., Atwood, C., and Brockwell, T.: Measurement of changes in atmospheric Ar/N₂ ratio using a rapid-switching, single-capillary mass spectrometer system, *Tellus B*, 56, 322–338, doi:10.1111/j.1600-0889.2004.00117.x, 2004.
- Levin, I. and Karstens, U.: Inferring high-resolution fossil fuel CO₂ records at continental sites from combined ¹⁴C and CO observations, *Tellus B*, 59, 245–250, doi:10.1111/j.1600-0889.2006.00244.x, 2007.

23583

- Lipman, T. E. and Delucchi, M. A.: Emissions of nitrous oxide and methane from conventional and alternative fuel motor vehicles, *Clim. Change*, 53, 477–516, doi:10.1023/A:1015235211266, 2002.
- Manning, A. C. and Keeling, R. F.: Global oceanic and land biotic carbon sinks from the Scripps atmospheric oxygen flask sampling network, *Tellus B*, 58, 95–116, doi:10.1111/j.1600-0889.2006.00175.x, 2006.
- Manning, M. R., Brenninkmeijer, C. A. M., and Allan, W.: Atmospheric carbon monoxide budget of the southern hemisphere: Implications of ¹³C/¹²C measurements, *J. Geophys. Res. Atmos.*, 102, 10673–10682, doi:10.1029/96jd02743, 1997.
- Meijer, H. A. J., Smid, H. M., Perez, E., and Keizer, M. G.: Isotopic characterisation of anthropogenic CO₂ emissions using isotopic and radiocarbon analysis, *Physics and Chemistry of the Earth*, 21, 483–487, doi:10.1016/S0079-1946(97)81146-9, 1996.
- Mills, G. A., and Urey, H. C.: The kinetics of isotopic exchange between carbon dioxide, bicarbonate ion, carbonate ion and water, *J. Am. Chem. Soc.*, 62, 1019–1026, doi:10.1021/Ja01862a010, 1940.
- Muzio, L. J., Teague, M. E., Kramlich, J. C., Cole, J. A., McCarthy, J. M., and Lyon, R. K.: Errors in Grab Sample Measurements of N₂O from Combustion Sources, *JAPCA*, 39, 287–293, doi:10.1080/08940630.1989.10466528, 1989.
- Nakagawa, F., Tsunogai, U., Komatsu, D. D., Yamada, K., Yoshida, N., Moriizumi, J., Nagamine, K., Iida, T., and Ikebe, Y.: Automobile exhaust as a source of ¹³C- and D-enriched atmospheric methane in urban areas, *Org. Geochem.*, 36, 727–738, doi:10.1016/j.orggeochem.2005.01.003, 2005.
- Nam, E. K., Jensen, T. E., and Wallington, T. J.: Methane Emissions from Vehicles, *Environ. Sci. Technol.*, 38, 2005–2010, doi:10.1021/es034837g, 2004.
- NOAA – AGGI 2011: <http://www.esrl.noaa.gov/gmd/aggi> (last access: March 2013), 2011.
- Pataki, D., Xu, T., Luo, Y., and Ehleringer, J.: Inferring biogenic and anthropogenic carbon dioxide sources across an urban to rural gradient, *Oecologia*, 152, 307–322, doi:10.1007/s00442-006-0656-0, 2007.
- Pataki, D. E., Bowling, D. R., and Ehleringer, J. R.: Seasonal cycle of carbon dioxide and its isotopic composition in an urban atmosphere: Anthropogenic and biogenic effects, *J. Geophys. Res. Atmos.*, 108, 4735, doi:10.1029/2003jd003865, 2003.

23584

- Pataki, D. E., Bowling, D. R., Ehleringer, J. R., and Zobitz, J. M.: High resolution atmospheric monitoring of urban carbon dioxide sources, *Geophys. Res. Lett.*, 33, L03813, doi:10.1029/2005GL024822, 2006.
- Pathirana, S. L and Röckmann, T.: An analytical system for studying the stable isotopes of carbon monoxide using Continuous Flow – Isotope Ratio Mass Spectroscopy (CF-IRMS), in preparation, 2013.
- Pfister, G., Pétron, G., Emmons, L. K., Gille, J. C., Edwards, D. P., Lamarque, J. F., Attie, J. L., Granier, C., and Novelli, P. C.: Evaluation of CO simulations and the analysis of the CO budget for Europe, *J. Geophys. Res.-Atmos.*, 109, D19304, doi:10.1029/2004jd004691, 2004.
- Ravishankara, A., Daniel, J. S., and Portmann, R. W.: Nitrous oxide (N₂O): The dominant ozone-depleting substance emitted in the 21st century, *Science*, 326, 123–125, doi:10.1126/science.1176985, 2009.
- Rhys-Tyler, G. A., Legassick, W., and Bell, M. C.: The significance of vehicle emissions standards for levels of exhaust pollution from light vehicles in an urban area, *Atmos. Environ.*, 45, 3286–3293, doi:10.1016/j.atmosenv.2011.03.035, 2011.
- Rivier, L., Ciais, P., Hauglustaine, D. A., Bakwin, P., Bousquet, P., Peylin, P., and Klonicki, A.: Evaluation of SF₆, C₂Cl₄, and CO to approximate fossil fuel CO₂ in the Northern Hemisphere using a chemistry transport model, *J. Geophys. Res.*, 111, D16311, doi:10.1029/2005JD006725, 2006.
- Röckmann, T., Gómez Álvarez, C. X., Walter, S., Veen, C. v., Wollny, A. G., Gunthe, S. S., Helas, G., Pöschl, U., Keppler, F., Greule, M., and Brand, W. A.: The isotopic composition of H₂ from wood burning – dependency on combustion efficiency, moisture content and δD of local precipitation, *J. Geophys. Res.*, 115, D17308, doi:10.1029/2009JD013188, 2010.
- Röckmann, T., Jöckel, P., Gros, V., Bräunlich, M., Possnert, G., and Brenninkmeijer, C. A. M.: Using ¹⁴C, ¹³C, ¹⁸O and ¹⁷O isotopic variations to provide insights into the high northern latitude surface CO inventory, *Atmos. Chem. Phys.*, 2, 147–159, doi:10.5194/acp-2-147-2002, 2002.
- Ropkins, K., Beebe, J., Li, H., Daham, B., Tate, J., Bell, M., and Andrews, G.: Real-World Vehicle Exhaust Emissions Monitoring: Review and Critical Discussion, *Crit. Rev. Environ. Sci. Technol.*, 39, 79–152, doi:10.1080/10643380701413377, 2009.
- Saurer, M., Prévôt, A. S. H., Dommen, J., Sandradewi, J., Baltensperger, U., and Siegwolf, R. T. W.: The influence of traffic and wood combustion on the stable isotopic composition of carbon monoxide, *Atmos. Chem. Phys.*, 9, 3147–3161, doi:10.5194/acp-9-3147-2009, 2009.

23585

- Schumacher, M., Werner, R. A., Meijer, H. A. J., Jansen, H. G., Brand, W. A., Geilmann, H., and Neubert, R. E. M.: Oxygen isotopic signature of CO₂ from combustion processes, *Atmos. Chem. Phys.*, 11, 1473–1490, doi:10.5194/acp-11-1473-2011, 2011.
- Steinbach, J., Gerbig, C., Rodenbeck, C., Karstens, U., Minejima, C., and Mukai, H.: The CO₂ release and Oxygen uptake from Fossil Fuel Emission Estimate (COFFEE) dataset: effects from varying oxidative ratios, *Atmos. Chem. Phys.*, 11, 6855–6870, doi:10.5194/acp-11-6855-2011, 2011.
- Stephens, B. B., Keeling, R. F., and Paplawsky, W. J.: Shipboard measurements of atmospheric oxygen using a vacuum-ultraviolet absorption technique, *Tellus B*, 55, 857–878, doi:10.1046/j.1435-6935.2003.00075.x, 2003.
- Stevens, C. M., Krout, L., Walling, D., Venters, A., Engelkemeir, A., and Ross, L. E.: The isotopic composition of atmospheric carbon monoxide, *Earth Planet. Sci. Lett.*, 16, 147–165, doi:10.1016/0012-821X(72)90183-5, 1972.
- Suntharalingam, P., Jacob, D. J., Palmer, P. I., Logan, J. A., Yantosca, R. M., Xiao, Y. P., Evans, M. J., Streets, D. G., Vay, S. L., and Sachse, G. W.: Improved quantification of Chinese carbon fluxes using CO₂/CO correlations in Asian outflow, *J. Geophys. Res.-Atmos.*, 109, D18S18, doi:10.1029/2003jd004362, 2004.
- Tarasova, O. A., Brenninkmeijer, C. A. M., Assonov, S. S., Elansky, N. F., Röckmann, T., and Sofiev, M. A.: Atmospheric CO along the Trans-Siberian Railroad and River Ob: source identification using isotope analysis, *J. Atmos. Chem.*, 57, 135–152, doi:10.1007/s10874-007-9066-x, 2007.
- Toyoda, S., Yamamoto, S., Arai, S., Nara, H., Yoshida, N., Kashiwakura, K., and Akiyama, K.: Isotopomeric characterization of N₂O produced, consumed, and emitted by automobiles, *Rapid Commun. Mass Sp.*, 22, 603–612, doi:10.1002/rcm.3400, 2008.
- Tsunogai, U., Hachisu, Y., Komatsu, D. D., Nakagawa, F., Gamo, T., and Akiyama, K.: An updated estimation of the stable carbon and oxygen isotopic compositions of automobile CO emissions, *Atmos. Environ.*, 37, 4901–4910, doi:10.1016/j.atmosenv.2003.08.008, 2003.
- Turnbull, J. C., Karion, A., Fischer, M. L., Faloona, I., Guilderson, T., Lehman, S. J., Miller, B. R., Miller, J. B., Montzka, S., and Sherwood, T.: Assessment of fossil fuel carbon dioxide and other anthropogenic trace gas emissions from airborne measurements over Sacramento, California in spring 2009, *Atmos. Chem. Phys.*, 11, 705–721, doi:10.5194/acp-11-705-2011, 2011.

23586

- Turnbull, J. C., Miller, J. B., Lehman, S. J., Tans, P. P., Sparks, R. J., and Southon, J.: Comparison of $^{14}\text{CO}_2$, CO, and SF₆ as tracers for recently added fossil fuel CO₂ in the atmosphere and implications for biological CO₂ exchange, *Geophys. Res. Lett.*, 33, L01817, doi:10.1029/2005GL024213, 2006.
- 5 UNFCCC, Greenhouse Gas Inventory Data: http://unfccc.int/ghg_data/ghg_data_unfccc/items/4146.php (last access: June 2013), 2013.
- Vollmer, M. K., Juergens, N., Steinbacher, M., Reimann, S., Weilenmann, M., and Buchmann, B.: Road vehicle emissions of molecular hydrogen (H₂) from a tunnel study, *Atmos. Environ.*, 41, 8355–8369, doi:10.1016/j.atmosenv.2007.06.037, 2007.
- 10 Vollmer, M. K., Walter, S., Bond, S. W., Soltic, P., and Röckmann, T.: Molecular hydrogen (H₂) emissions and their isotopic signatures (H/D) from a motor vehicle: implications on atmospheric H₂, *Atmos. Chem. Phys.*, 10, 5707–5718, doi:10.5194/acp-10-5707-2010, 2010.
- von Schneidemesser, E., Monks, P. S., and Plass-Duelmer, C.: Global comparison of VOC and CO observations in urban areas, *Atmos. Environ.*, 44, 5053–5064, doi:10.1016/j.atmosenv.2010.09.010, 2010.
- 15 Wang, Y., Munger, J., Xu, S., McElroy, M., Hao, J., Nielsen, C., and Ma, H.: CO₂ and its correlation with CO at a rural site near Beijing: implications for combustion efficiency in China, *Atmos. Chem. Phys.*, 10, 8881–8897, doi:10.5194/acp-10-8881-2010, 2010.
- Weilenmann, M., Favez, J.-Y., and Alvarez, R.: Cold-start emissions of modern passenger cars at different low ambient temperatures and their evolution over vehicle legislation categories, *Atmos. Environ.*, 43, 2419–2429, doi:10.1016/j.atmosenv.2009.02.005, 2009.
- Wendeberg, M., Richter, J. M., Rothe, M., and Brand, W. A.: Jena Reference Air Set (JRAS): a multi-point scale anchor for isotope measurements of CO₂ in air, *Atmos. Meas. Tech.*, 6, 817–822, doi:10.5194/amt-6-817-2013, 2013.
- 25 Werner, R. A., Rothe, M., and Brand, W. A.: Extraction of CO₂ from air samples for isotopic analysis and limits to ultra high precision $\delta^{18}\text{O}$ determination in CO₂ gas, *Rapid Commun. Mass Sp.*, 15, 2152–2167, doi:10.1002/rcm.487, 2001.
- WMO: WMO Greenhouse Gas Bulletin No. 8, ISSN 2078-0796, 2012.
- Worden, H. M., Deeter, M. N., Frankenberg, C., George, M., Nichitiu, F., Worden, J., Aben, I., Bowman, K. W., Clerbaux, C., and Coheur, P.-F.: Decadal record of satellite carbon monoxide observations, *Atmos. Chem. Phys.*, 13, 837–850, doi:10.5194/acp-13-837-2013, 2013.
- 30 Yakir, D. and Sternberg, L. d. S.: The use of stable isotopes to study ecosystem gas exchange, *Oecologia*, 123, 297–311, doi:10.1007/s004420051016, 2000.

23587

- Yakir, D. and Wang, X.-F.: Fluxes of CO₂ and water between terrestrial vegetation and the atmosphere estimated from isotope measurements, *Nature*, 380, 515–517, doi:10.1038/380515a0, 1996.
- 5 Zellweger, C., Hüglin, C., Klausen, J., Steinbacher, M., Vollmer, M., and Buchmann, B.: Inter-comparison of four different carbon monoxide measurement techniques and evaluation of the long-term carbon monoxide time series of Jungfraujoch, *Atmos. Chem. Phys.*, 9, 3491–3503, doi:10.5194/acp-9-3491-2009, 2009.
- Zimnoch, M., Florkowski, T., Necki, J. M., and Neubert, R. E.: Diurnal variability of $\delta^{13}\text{C}$ and $\delta^{18}\text{O}$ of atmospheric CO₂ in the urban atmosphere of Kraków, Poland, *Isotop. Environ. Health Stud.*, 40, 129–143, doi:10.1080/10256010410001670989, 2004.
- 10 Zondervan, A. and Meijer, H. A. J.: Isotopic characterisation of CO₂ sources during regional pollution events using isotopic and radiocarbon analysis, *Tellus B*, 48, 601–612, doi:10.1034/j.1600-0889.1996.00013.x, 1996.

23588

Table 1. CO : CO₂ ratios for traffic and fossil fuel emissions. Results from Europe are shown in bold.

Reference	CO : CO ₂ (ppb : ppm)	Location	Measurement year
CO : CO ₂ traffic			
Bradley et al., 2000	50 ± 4 ^a	Denver, CO, USA	1997
Bishop and Stedman, 2008	9.3 . . . 18.4	US cities	2005–2007
Vollmer et al. (2007)	9.19 ± 3.74	Gubrist tunnel, Switzerland	2004
This study	4.15 ± 0.34	Islisberg tunnel, Switzerland	2011
CO : CO ₂ fossil fuel			
Graven et al. (2009)	18.6 ± 2.7 ^b	flights US	2004
Turnbull et al. (2011)	14 ± 2	Sacramento, US (flight)	2009
Meijer et al. (1996)	7.8 ± 1.5^c	Kollumerwaard, Netherlands	1994–1996
Gamnizer et al. (2006)	11.0 ± 1.1^d	Heidelberg, Germany	2002

^a OP-FTIR measurements;

^b average of the 5 data points given in Graven et al. (2009);

^c average of the 8 data points given in Meijer et al. (1996);

^d event sample measurements.

23589

Table 2. Traffic emission N₂O : CO₂ ratios from various studies. The bold text shows the studies concerning European traffic.

Reference	N ₂ O : CO ₂ (g : g) × 10 ⁵	Location	Measurement year
Berges et al. (1993)	14 ± 9	Klaratunnel, Sweden	1992
Berges et al. (1993)	6 ± 3	Elbtunnel, Germany	1992
Jimenez et al. (2000)	8.8 ± 2.8	Los Angeles, USA	1996
Jimenez et al. (2000)	12.8 ± 0.3	Manchester, NH, USA	1998
Becker et al. (2000)	4.1 ± 1.2	Kiesbergtunnel, Germany	1997
Becker et al., 2000	4.3 ± 1.2	Ford Research Laboratory (USA)	1996–1998
Bradley et al., 2000	18.7 ± 1.3	Denver, CO, USA	1997
This study	1.8 ± 0.2	Islisbergtunnel, Switzerland	2011

23590

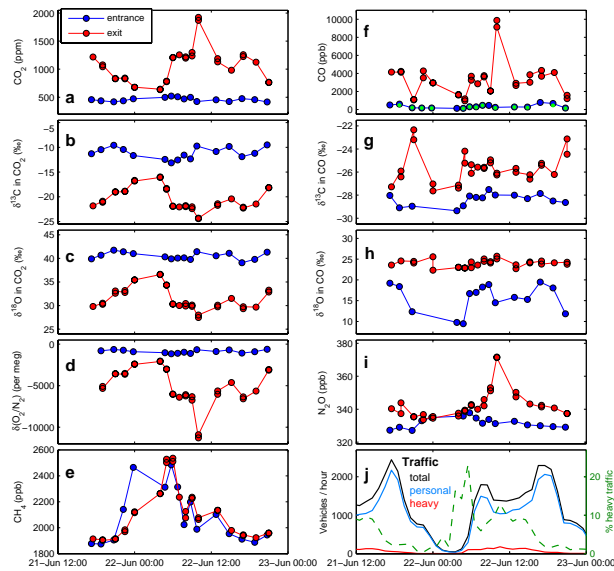


Fig. 1. (a)–(i) Results of the flasks sampled during 21–22 June 2011 (the intensive flask sampling campaign). O_2/N_2 , CO_2 , ^{13}C and ^{18}O in CO_2 , N_2O and CH_4 were measured by MPI-BGC. ^{13}C and ^{18}O in CO were measured at IMAU. CO mole fractions were measured both at MPI-BGC and IMAU; the green dots show the results from MPI. **(j)** Traffic count hourly data during the same time interval showing separately the personal vehicle category and the “heavy traffic” category (which includes all large vehicles: trailers, trucks and busses). The dotted green line shows the proportion of heavy traffic (right hand axis).

23591

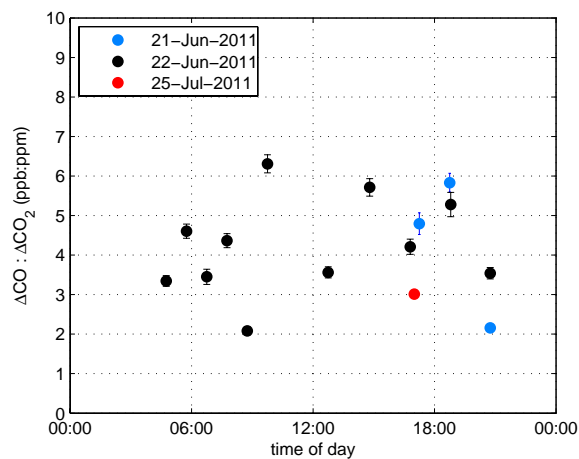


Fig. 2. $\Delta CO : \Delta CO_2$ ratios for groups of exit – entrance flasks sampled in parallel, shown against time of day. Different colors indicate different sampling dates.

23592

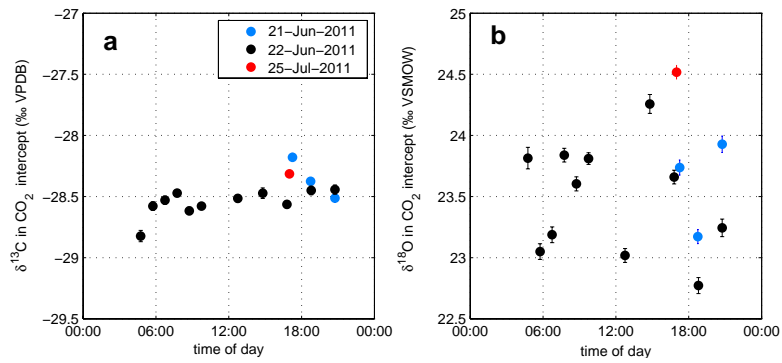


Fig. 3. Intercepts of Keeling plots for ^{13}C in CO_2 (**a**) and ^{18}O in CO_2 (**b**) for groups of entrance-exit flasks, plotted versus time of day. Different colors indicate different sampling dates. The error bars show the error of the intercept.

23593

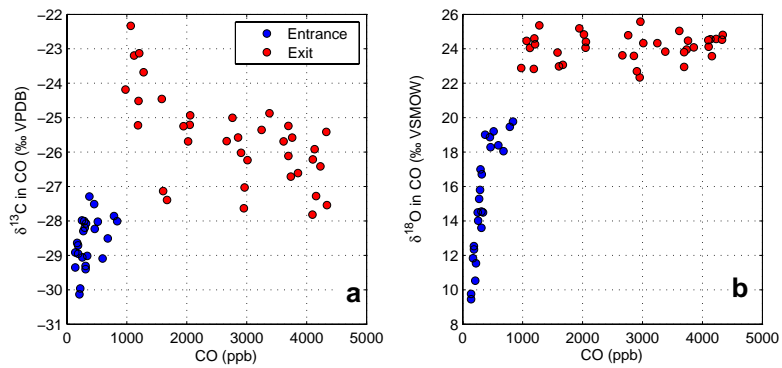


Fig. 4. $\delta^{13}\text{C}$ in CO (**a**) and $\delta^{18}\text{O}$ in CO (**b**), with entrance and exit data shown in blue respectively red colors. Two data points with CO around 10 000 ppb are not shown.

23594

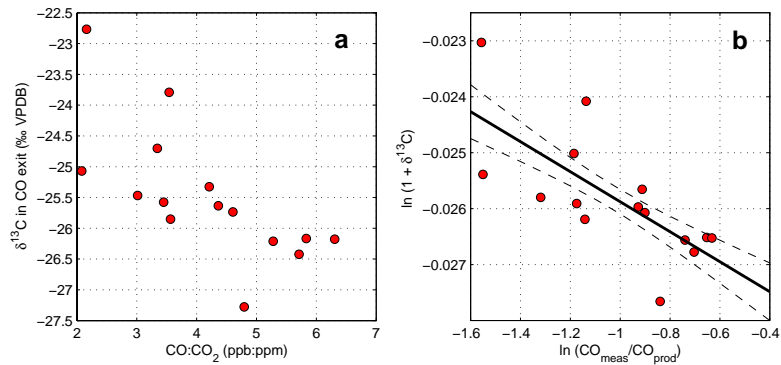


Fig. 5. (a) $\delta^{13}\text{C}$ in CO at the exit site, averaged for each sampling action, plotted against the CO : CO₂ ratios computed for the same sampling action. (b) Rayleigh plot used to determine the fractionation during CO destruction. The slope of the linear fit gives the fractionation constant ϵ . The dashed lines represent the 68 % confidence bounds for the linear function.

23595

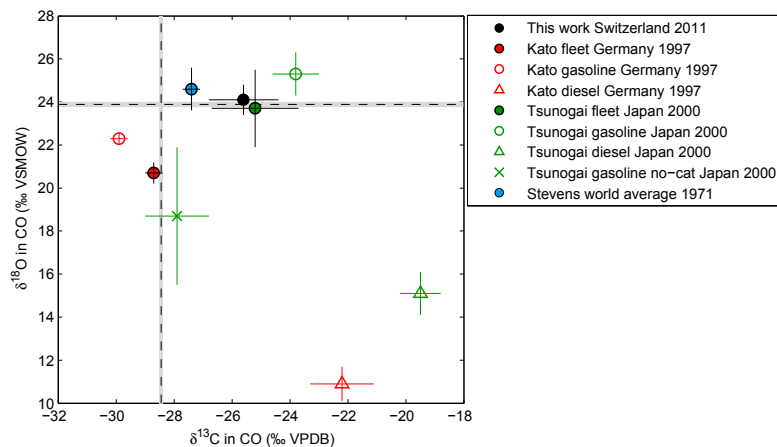


Fig. 6. $\delta^{18}\text{O}$ versus $\delta^{13}\text{C}$ in traffic CO from our work and previous studies: Kato et al. (1999a) (Kato); Tsunogai et al. (2003) (Tsunogai); Stevens et al. (1972) (Stevens). The year shown in legend is the year when measurements were done. The dotted black lines indicate the $\delta^{18}\text{O}$ in atmospheric oxygen (Barkan and Luz, 2005) and the average $\delta^{13}\text{C}$ value of the fuel in our study, as estimated from the $\delta^{13}\text{C}$ value of CO₂; the shades indicate their standard errors, and their intersection shows the hypothetical CO isotopic composition in the absence of fractionation. The CO isotopic composition of gasoline vehicles from Kato et al. (1999a) is based on vehicles without a catalyst and one vehicle with catalyst functioning with cold engine.

23596

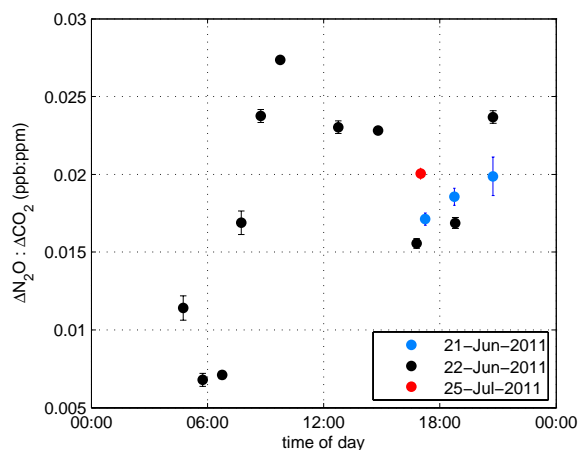


Fig. 7. $\Delta N_2O : \Delta CO_2$ ratios for groups of exit – entrance flasks sampled in parallel, shown against time of day. Different colors indicate different sampling dates.

23597

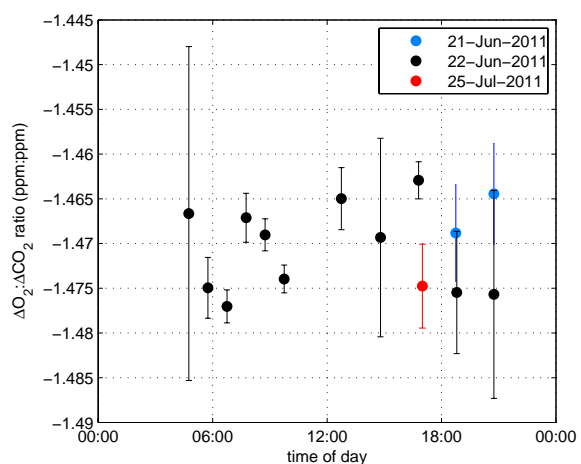


Fig. 8. $\Delta O_2 : \Delta CO_2$ ratios for groups of exit – entrance flasks sampled in parallel, shown against time of day. Different colors indicate different sampling dates. The negative ratios are due to the fact that O_2 is consumed while CO_2 is produced.

23598