

A Breezing Proof of the KMW Bound

CORINNA COUPETTE, MPI for Informatics and Saarbrücken Graduate School of Computer Science, Germany

CHRISTOPH LENZEN, MPI for Informatics, Germany

In their seminal paper from 2004, Kuhn, Moscibroda, and Wattenhofer (KMW) proved a hardness result for several fundamental graph problems in the LOCAL model: For any (randomized) algorithm, there are input graphs with n nodes and maximum degree Δ on which $\Omega(\min\{\sqrt{\log n/\log \log n}, \log \Delta/\log \log \Delta\})$ (expected) communication rounds are required to obtain polylogarithmic approximations to a minimum vertex cover, minimum dominating set, or maximum matching. Via reduction, this hardness extends to symmetry breaking tasks like finding maximal independent sets or maximal matchings. Today, more than 15 years later, there is still no proof of this result that is easy on the reader. Setting out to change this, in this work, we provide a fully self-contained and *simple* proof of the KMW lower bound. The key argument is algorithmic, and it relies on an invariant that can be readily verified from the generation rules of the lower bound graphs.

CCS Concepts: • **Theory of computation** → **Distributed algorithms**; • **Computing methodologies** → **Distributed algorithms**; • **Mathematics of computing** → *Graph theory*.

Additional Key Words and Phrases: LOCAL model, lower bounds, indistinguishability

1 INTRODUCTION AND RELATED WORK

A key property governing the complexity of distributed graph problems is their *locality*: the distance up to which the nodes running a distributed algorithm need to explore the graph to determine their local output. Under the assumption that nodes have unique identifiers, the locality of any task is at most D , the diameter of the graph. However, many problems of interest have locality $o(D)$, and understanding the locality of such problems has been a main objective of the distributed computing community since the inception of the field.

A milestone in these efforts is the 2004 article by Kuhn, Moscibroda, and Wattenhofer, which proves a lower bound of $\Omega(\min\{\sqrt{\log n/\log \log n}, \log \Delta/\log \log \Delta\})$ on the locality of several basic graph problems [19], where n is the number of nodes and Δ is the maximum degree of the input graph. The bound holds under both randomization and approximation, and it was the first result of this generality beyond the classic $\Omega(\log^* n)$ bound on 3-coloring cycles [25]. Linial’s bound has received much attention, with various extensions [10, 15, 16, 24, 26] and alternative proofs [23, 30]. A recent wave of major results [3, 8, 9], based on what has been termed *round elimination*, can be seen as generalizing Linial’s technique further.

Despite its significance, apart from an early extension to maximum matching by the same authors [20], the KMW lower bound has not inspired follow-up results. One reason might be that the result is not as well-understood. History itself appears to drive this point home: In a 2010 arXiv article [21], an improvement to $\Omega(\min\{\sqrt{\log n}, \log \Delta\})$ was claimed, which was refuted in 2016 by Bar-Yehuda et al. [7]. 2016 was also the year when finally a journal article covering the lower bound was published [22]—over a decade after the initial construction! In the journal article, the technical core of the proof spans six pages and involves fairly convoluted notation. While there is no objective measure of simplicity, we believe that a more digestible proof is highly desirable.

Authors’ addresses: Corinna Coupette, coupette@mpi-inf.mpg.de, MPI for Informatics, Saarland Informatics Campus, Saarbrücken, 66123, Saarbrücken Graduate School of Computer Science, Saarland Informatics Campus, Saarbrücken, 66123, Germany; Christoph Lenzen, clenzen@mpi-inf.mpg.de, MPI for Informatics, Saarland Informatics Campus, Saarbrücken, 66123, Germany.

Our Contribution

In this work, we present a novel proof of the KMW bound. Our main contribution is to replace the heart of the argument, showing that certain nodes have indistinguishable k -hop neighborhoods, with a proof based on an algorithmic invariant. Our algorithm constructs the graph isomorphism between the nodes’ neighborhoods, where the key observation is that a simple invariant is sufficient to overcome the main obstacle, referred to by Kuhn et al. as the “critical path.” This results in a much shorter and more straightforward argument proving the intuition that the respective graph is crafted “just right” to ensure that the relevant nodes’ views are indistinguishable up to distance k . Our second contribution is a fully self-contained and easily accessible presentation of the proof. Ideally, a single pass through the paper should suffice to understand the full reasoning, without reliance on statements shown elsewhere. We hope that this provides a solid foundation for future work that may extend the KMW result.

Further Related Work

The KMW bound applies to fundamental graph problems that are locally checkable in the sense of Naor and Stockmeyer [26]. Balliu et al. give an overview of the known time complexity classes for such problems [4, 5], extending a number of prior works [12–14], and Suomela surveys the state of the art attainable via constant-time algorithms [29]. Bar-Yehuda et al. provide algorithms that compute $(2 + \varepsilon)$ -approximations to minimum (weighted) vertex cover and maximum (weighted) matching in $O(\log \Delta / \varepsilon \log \log \Delta)$ and $O(\log \Delta / \log \log \Delta)$ deterministic rounds, respectively [6, 7], demonstrating that the KMW bound is tight when parametrized by Δ even for constant approximation ratios. For symmetry breaking tasks, the classic algorithm by Panconesi and Rizzi [27] to compute maximal matchings and maximal independent sets in $O(\log^* n + \Delta)$ deterministic rounds has recently been shown to be optimal for a wide range of parameters [3].

Overview

After introducing basic graph theoretical concepts and notation in Section 2, we define the lower bound graphs in Section 3.1. We infer their order and maximum degree in Section 3.2, and prove the indistinguishability of certain nodes assuming high girth in Section 3.3. To ensure that lower bound graphs with high girth exist, we construct such graphs with low girth in Section 4.1 and lift them to high girth in Section 4.3 with the help of regular graphs introduced in Section 4.2. We derive the KMW bound for polylogarithmic approximations to a minimum vertex cover in Section 5. The appendix provides extensions to minimum dominating set, maximum matching, maximal matching, and maximal independent set.

2 PRELIMINARIES

The basic graph theoretic notation used in this work is summarized in Appendix A.1 (p. 17); all our graphs are finite and simple. For completeness, Appendix A.2 (p. 17) defines the LOCAL model and formalizes the notion of a k -round distributed algorithm.

The key concept used to show that a graph problem is difficult to solve (exactly or approximately) for a k -round distributed algorithm in the LOCAL model is the k -hop *indistinguishability* of nodes’ neighborhoods. In the following, we formalize this notion.

Definition 2.1 (k -hop neighborhood $\Gamma_G^k(v)$). The k -hop neighborhood of a node v in G is the set of nodes at distance at most k from v , i.e., $\Gamma^k(v) := \{w \in V(G) \mid d(v, w) \leq k\}$.

A k -round algorithm needs to decide at node v based on the following topology.

Definition 2.2 (k -hop subgraph $G^k(v)$). The k -hop subgraph of a node v in G is the subgraph induced by v and its k -hop neighborhood, restricted to the edges at distance at most k from v : $G^k(v) = G[\Gamma^k(v)] \setminus \{\{w, u\} \in E(G) \mid \min\{d(v, w), d(v, u)\} \geq k\}$.

Two nodes in a graph are indistinguishable to a k -round distributed algorithm if and only if these nodes see identical topologies within k hops (including identical inputs).

Definition 2.3 (k -hop indistinguishability in G). Two nodes v and w in G are indistinguishable to a k -round distributed algorithm (k -hop indistinguishable) if and only if there exists an isomorphism $\phi : V(G^k(v)) \rightarrow V(G^k(w))$ with $\phi(v) = w$.

3 CLUSTER TREES

The Cluster Tree (CT) is the main gadget in the derivation of the KMW bound. For $k \in \mathbb{N}$, it consists of a *Cluster Tree skeleton* CT_k and *Cluster Tree graphs* G_k :

Definition 3.1 (Cluster Tree skeleton). For $k \in \mathbb{N}$, a cluster tree skeleton (*CT skeleton*) is a tree $CT_k = (C_k, \mathcal{A}_k)$, rooted at $C_0 \in C_k$, that formulates connectivity requirements for graphs. A *cluster* $C \in C_k$ in CT_k requires an independent set of nodes in the graph. An *arc* between clusters C_i and C_j has the form $\langle (C_i, x_i), (C_j, x_j) \rangle = \langle (C_j, x_j), (C_i, x_i) \rangle$ for $x_i, x_j \in \mathbb{N}$, indicating that the clusters C_i and C_j must be connected as a biregular bipartite graph, where nodes from cluster C_i (C_j) have x_i (x_j) neighbors in C_j (C_i).

Definition 3.2 (Cluster Tree graph). For $k \in \mathbb{N}$, a graph is called a cluster tree graph (*CT graph*), denoted G_k , if it satisfies the connectivity requirements of the CT skeleton CT_k .

3.1 Construction of Cluster Tree Skeletons

Definitions 3.1 and 3.2 (p. 3) fix the relationship between CT skeletons and CT graphs without detailing the structure CT_k . To specify this structure, we use the following terminology:

Definition 3.3 (Cluster position). A cluster C in CT_k has position *internal* if $\delta(C) > 1$ (*internal cluster*) and position *leaf* if $\delta(C) = 1$ (*leaf cluster*).

Definition 3.4 (Cluster level). The *level* of a cluster C in CT_k , denoted $l(C)$, is its distance to the cluster C_0 , with $l(C_0) = 0$. The smaller the distance to C_0 , the *lower* the level.

Definition 3.5 (Parent cluster). For a cluster C in CT_k with $l(C) > 0$, its *parent cluster* is its unique neighboring cluster C' with $l(C') < l(C)$ in CT_k .

Definition 3.6 (Outgoing label). Given $CT_k = (C_k, \mathcal{A}_k)$, we say that a cluster C_i is connected to a cluster C_j via *outgoing label* x_i if there exists an x_j such that $\langle (C_i, x_i), (C_j, x_j) \rangle \in \mathcal{A}_k$.

Given $\beta \geq 2(k+1)$,¹ the structure of CT_k is now defined inductively. The base case of the construction is CT_1 , which consists of four clusters and three arcs:

Definition 3.7 (Base case CT_1). $CT_1 = (C_1, \mathcal{A}_1)$, where $C_1 := \{C_0, C_1, C_2, C_3\}$ and $\mathcal{A}_1 := \{\langle (C_0, \beta^0), (C_1, \beta^1) \rangle, \langle (C_0, \beta^1), (C_2, \beta^2) \rangle, \langle (C_1, \beta^0), (C_3, \beta^1) \rangle\}$.

¹In [19, 22], β is referred to as δ . We avoid δ because it is often used to denote the degree of a node.

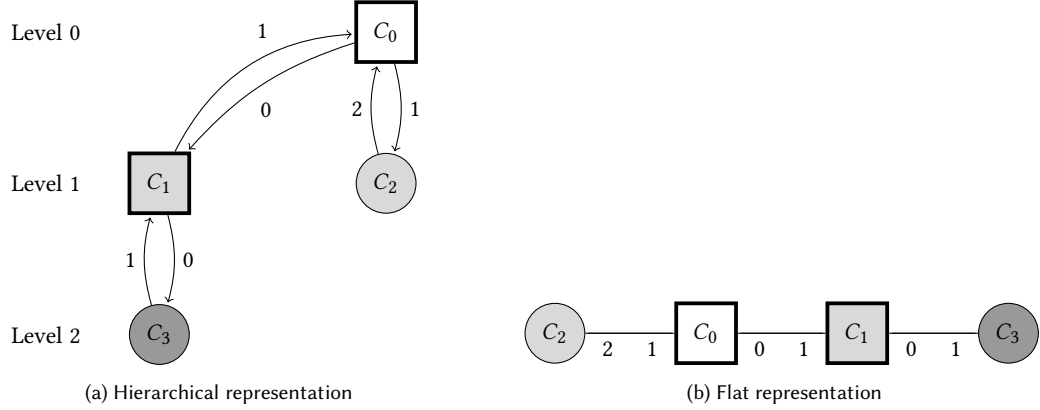


Fig. 1. Representations of CT_1 (shaded by cluster sizes; darker means smaller). Cluster shapes indicate cluster position (*internal* or *leaf*); core clusters depicted with bold frame. Arc labels are exponents of the parameter β , indicating how many neighbors nodes in one cluster have in another.

Our indistinguishability argument for CT graphs will focus on nodes in the internal clusters of CT_1 , which we call the *core clusters*:

Definition 3.8 (Core clusters). The internal clusters of CT_1 , C_0 and C_1 , are *core clusters*.

Based on CT_{k-1} , for $k \geq 2$, CT_k is grown as follows.

Definition 3.9 (Growth rules for CT_k given CT_{k-1}).

- (1) To each internal cluster C_i in CT_{k-1} , attach a new neighboring cluster C'_i via an arc $\langle (C_i, \beta^k), (C'_i, \beta^{k+1}) \rangle$. We call such added leaf clusters *branch instantiation clusters*.
- (2) To each leaf cluster C_i in CT_{k-1} that is connected to its parent cluster via outgoing label β^q , add k neighboring clusters C'_i with arcs $\langle (C_i, \beta^p), (C'_i, \beta^{p+1}) \rangle$ for all $p \in [k]_0 \setminus \{q\}$. We call such added leaf clusters *branch consolidation clusters*.

Figure 1 (p. 4) shows CT_1 in its hierarchical and flat representations, and flat representations of CT_2 and CT_3 are given in Figure 2 (p. 5) to illustrate the growth process.² In all figures, we write x for an arc label β^x (i.e., we represent arc labels by their base β logarithms) to reduce visual clutter, and in the flat representations, arc labels are depicted like port numbers on the undirected edges incident to the clusters that are connected by the arc.

3.2 Order and Maximum Degree of Cluster Tree Graphs

The CT skeleton CT_k constrains the number of nodes in a CT graph G_k in several ways:

OBSERVATION 3.10 (ORDER CONSTRAINTS FOR G_k FROM CT_k).

- (1) For $k > 1$, the number of nodes in a cluster of CT_k on level $k + 1$ must be at least β^k , since there is always at least one branch instantiation cluster C' on level $k + 1$, and nodes in the parent cluster of C' have β^k neighbors in C' .

²The labels of the arcs connecting leaf clusters in CT_3 to the rest of CT_3 are omitted in the drawing. They are such that every internal cluster has outgoing labels $\{\beta^i \mid i \in [3]_0\}$, and if a leaf cluster C is connected to an internal cluster C' with label β^i outgoing from C' , then C has outgoing label β^{i+1} .

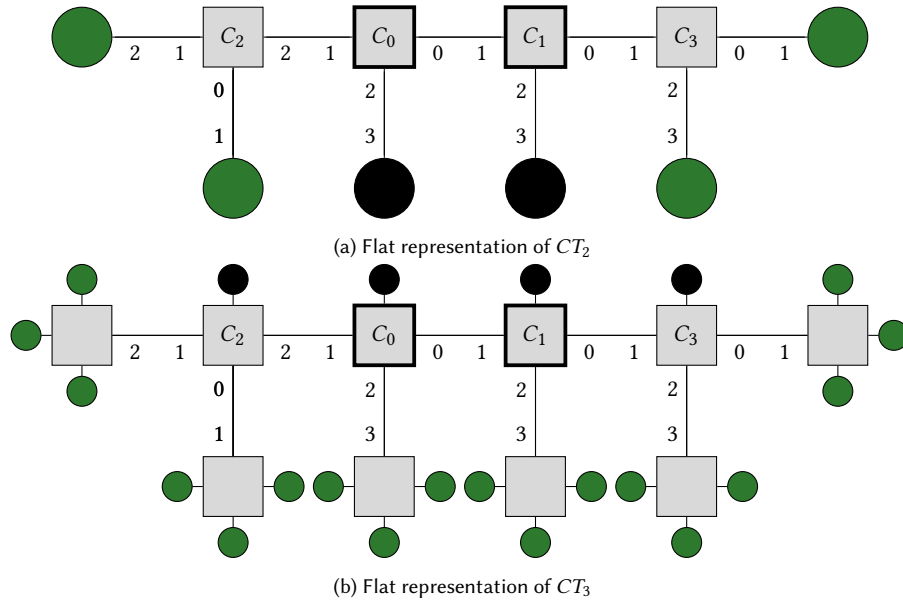


Fig. 2. Representations of CT_2 and CT_3 (colored by cluster types; grey: internal, green: branch consolidation, black: branch instantiation). Cluster shapes correspond to cluster position (*internal* or *leaf*); core clusters depicted with bold frame. Arc labels are exponents of the parameter β , indicating how many neighbors nodes in one cluster have in another.

- (2) To ensure that the arc labels (β^i, β^{i+1}) define feasible biregular bipartite graphs for all $i \in [k]_0$, the number of nodes in a single cluster must fall by a factor of β per level.
- (3) For $k > 1$, in the smallest graph G_k satisfying CT_k , clusters on level l have β^{2k-l+1} nodes, e.g., a cluster on level $k + 1$ has β^k nodes, and C_0 has β^{2k+1} nodes.

PROOF. Follows immediately from the connectivity structure prescribed by CT_k . □

Further, we can determine the number of clusters on each level of CT_k :

THEOREM 3.11 (ORDER OF CT SKELETONS BY LEVEL). For $k \in \mathbb{N}$, the number of clusters n_C on level $l \in \mathbb{N}_0$ in CT_k is³

$$n_C(k, l) = \begin{cases} 1 & l = 0 \\ \frac{k!}{(k-l+1)!} \cdot (k-l+2) & 1 \leq l \leq k+1 \\ 0 & l > k+1. \end{cases}$$

PROOF. For $l = 1$, $\frac{k!}{(k-l+1)!} \cdot (k-l+2) = k+1$. We proceed by induction on k . For $k = 1$, we have one cluster on the zeroth level, two clusters on the first level, and one cluster on the second level, cf. Figure 1 (p. 4). Since $n_C(1, 0) = 1$, $n_C(1, 1) = \frac{1!}{1!} \cdot 2 = 2$, $n_C(1, 2) = \frac{1!}{0!} \cdot 1 = 1$, and $n_C(1, l) = 0$ for all $l > 2$, the claim holds for the base case, i.e., for $k = 1$ and all l .

Therefore, assume that the claim holds for some k , i.e., in CT_k , the number of clusters on level l is given by $n_C(k, l)$. Due to Definition 3.9 (p. 4), which enforces that all new leaf clusters lie on the level above their parent clusters, the

³Following widespread conventions, we set $0! := 1$.

number of clusters on the zeroth level always remains one. This level-0 cluster is an internal cluster in CT_1 and hence also in CT_k . By growth rule 1, exactly one cluster is added on the level above the zeroth level when transitioning to CT_{k+1} . Therefore, if CT_k has $k + 1$ clusters on the first level, CT_{k+1} has $k + 2$ clusters on the first level. Furthermore, new clusters are added only on levels at most one above already existing clusters, so if CT_k has no clusters on levels above $k + 1$, CT_{k+1} has no clusters on levels above $k + 2$. With these observations, for $l = 0$, $l = 1$, and $l > k + 1$, the number of clusters on level l in CT_{k+1} is given by the formula stated in the theorem.

For the remaining levels, i.e., levels l with $1 < l \leq k + 1$, observe that by the growth rules of CT_k , all clusters present on level l in CT_k are guaranteed to be internal clusters in CT_{k+1} , with $k + 1$ children on level $l + 1$, and these child clusters are the only clusters on level $l + 1$. Thus, for $k, l \geq 1$, the number of clusters satisfies the recurrence relation

$$n_C(k + 1, l + 1) = (k + 1) \cdot n_C(k, l).$$

By the inductive hypothesis, we have that $n_C(k, l) = \frac{k!}{(k-l+1)!} \cdot (k-l+2)$ for $1 \leq l \leq k + 1$, so

$$n_C(k + 1, l + 1) = \frac{(k + 1)!(k - l + 2)}{(k - l + 1)!} = \frac{(k + 1)!}{((k + 1) - (l + 1) + 1)!} \cdot ((k + 1) - (l + 1) + 2),$$

as required. As this verifies the claimed expression for $n_C(k + 1, l)$ for all $1 < l \leq k + 2$, this completes the inductive step, concluding the proof. \square

This allows us to express the order of G_k in terms of $n_0 := |C_0|$, k , and β :

LEMMA 3.12 (*n IN TERMS OF n_0*). *In G_k , $n < n_0 \left(\frac{\beta}{\beta - (k+1)} \right)$ and $n - n_0 < n_0 \cdot \frac{2(k+1)}{\beta}$.*

PROOF. By Theorem 3.11 (p. 5) and Corollary 3.10 (p. 4), the number of nodes on level $l \in \mathbb{N}_0$ in G_k as a function of β , k , l , and n_0 is $n(\beta, k, l, n_0) = n_C(k, l) \cdot n_0 \cdot \beta^{-l}$. Because $n = \sum_{l=0}^{\infty} n(\beta, k, l, n_0) = \sum_{l=0}^{k+1} n(\beta, k, l, n_0)$, we get

$$\begin{aligned} n &= n_0 + n_0 \cdot \sum_{l=1}^{k+1} \frac{k!}{(k-l+1)!} \cdot (k-l+2) \cdot \beta^{-l} \leq n_0 + n_0 \cdot \sum_{l=1}^{k+1} \frac{k!(k+1)}{(k-l+1)!} \cdot \frac{1}{\beta^l} \\ &< n_0 + n_0 \cdot \sum_{l=1}^{k+1} \frac{(k+1)^l}{\beta^l} = n_0 \sum_{l=0}^{k+1} \left(\frac{k+1}{\beta} \right)^l < n_0 \sum_{l=0}^{\infty} \left(\frac{k+1}{\beta} \right)^l = n_0 \cdot \frac{\beta}{\beta - (k+1)}, \end{aligned}$$

where the last step uses that $\beta > k + 1$. Using our requirement that $\beta \geq 2(k + 1)$, we obtain

$$n - n_0 < n_0 \cdot \left(\frac{\beta}{\beta - (k+1)} - 1 \right) = n_0 \cdot \frac{k+1}{\beta - (k+1)} \leq n_0 \cdot \frac{2(k+1)}{\beta}. \quad \square$$

Finally, the construction of CT_k dictates the largest degree Δ of a node in G_k :

LEMMA 3.13 (*LARGEST DEGREE Δ OF G_k*). *The largest degree of a node in G_k is $\Delta = \beta^{k+1}$.*

PROOF. By construction, all nodes in internal clusters have degree $\sum_{i=0}^k \beta^i$, and the largest degree of nodes in leaf clusters is β^{k+1} . As $\beta \geq 2(k + 1) > 2$, $\max\{\sum_{i=0}^k \beta^i, \beta^{k+1}\} = \beta^{k+1}$. \square

3.3 Indistinguishability given High Girth

As observed by Kuhn et al. [19, 22], showing k -hop indistinguishability becomes easier when the nodes' k -hop subgraphs are trees, i.e., the girth is at least $2k + 1$. Notably, in a CT graph G_k with $g \geq 2k + 1$, the topology of a node's k -hop subgraph is determined entirely by the structure of the skeleton CT_k . Hence, without knowing the details of G_k , we can establish:

THEOREM 3.14 (*k*-HOP INDISTINGUISHABILITY OF NODES IN C_0 FROM NODES IN C_1). *Let G_k be a CT graph. If G_k has girth $g \geq 2k + 1$, and there are no local inputs, then $v_0 \in C_0$ and $v_1 \in C_1$ are k -hop indistinguishable.*

By Definition 2.3 (p. 3), $v_0 \in C_0$ and $v_1 \in C_1$ are k -hop indistinguishable if and only if there exists an isomorphism $\phi : V(G_k^k(v_0)) \rightarrow V(G_k^k(v_1))$ with $\phi(v_0) = v_1$. We prove the theorem constructively by showing the correctness of Algorithm 1 (p. 8), which purports to find such an isomorphism.

Algorithm 1 (p. 8) implements a *coupled depth-first search (coupled DFS)* on the k -hop subgraphs of $v_0 \in C_0$ and $v_1 \in C_1$: The main function, `FINDISOMORPHISM`(G_k, k, v_0, v_1), receives a CT graph G_k with high girth, along with the parameter k (both of which we assume to be accessible by the functions we call internally, alongside the mapping from nodes to their clusters), and one node from each of C_0 and C_1 as input, and it outputs the ϕ we are looking for. To obtain ϕ , `FINDISOMORPHISM` maps v_0 to v_1 and then calls the function `WALK`(v_0, v_1, \perp, k) before it returns ϕ . The `WALK` function modifies ϕ by mapping the *newly discovered* nodes in the neighborhoods of its first two input parameters (v and $w := \phi(v)$, initially: v_0 and v_1) to each other with the help of the function `MAP`. The third parameter of `WALK` (*prev*, initially: \perp) ensures that we only define ϕ for newly discovered nodes, while the fourth parameter (*depth*, initially: k) controls termination when `WALK` calls itself recursively on the newly discovered neighbors (and the newly discovered neighbors of these neighbors, and so on) until the entire k -hop subgraph of v_0 has been visited.

The tricky part now is to ascertain that the interplay between the functions `WALK` and `MAP` makes ϕ a bijection from $V(G_k^k(v_0))$ to $V(G_k^k(v_1))$, i.e., nodes that are paired up always have the same degree. Here, the representation of node neighborhoods used by the `WALK` function is key, which is based on the insight that the set of nodes neighboring v (resp. w) can be partitioned by the outgoing labels in CT_k through which neighboring nodes are discovered from v (w). Since these labels lie in $\{\beta^i \mid i \in [k + 1]_0\}$, `WALK` represents the neighborhood of v (w) as a list N_v (N_w) of $k + 2$ (possibly empty) lists (Algorithm 1, l. 9–13, p. 8). The list at index i holds all *previously undiscovered* nodes (we require $v' \neq prev$ and $w' \neq \phi(prev)$) connected to v (w) via v 's (w 's) outgoing label β^i , in any order.

The `WALK` function passes N_v and N_w to the function `MAP` (Algorithm 1, l. 14, p. 8), which sets $\phi(N_v[i][j]) := N_w[i][j]$ where possible (Algorithm 1, l. 19–21, p. 8). It then treats the special case that some nodes in N_v and N_w remain unmatched (Algorithm 1, l. 22–25, p. 8). By construction, without this special case, the ϕ returned by `FINDISOMORPHISM` is already an isomorphism between the subgraphs of $G_k^k(v_0)$ and $G_k^k(v_1)$ induced by the nodes of the domain for which ϕ is defined (and their images under ϕ). However, we still need to show that our special case suffices to extend this restricted isomorphism to a full isomorphism between $G_k^k(v_0)$ and $G_k^k(v_1)$. To facilitate our reasoning, we introduce *cluster identities*:

Definition 3.15 (*Cluster identity* $C(v)$). Given a node v in a CT graph G_k , we refer to its cluster in CT_k as its *cluster identity*, denoted as $C(v)$. For example, for $v_0 \in C_0$ and $v_1 \in C_1$, we have $C(v_0) = C_0$, $C(v_1) = C_1$, and $C(v_0) \neq C(v_1)$.

We begin with a simple observation:

LEMMA 3.16 (**VARIABLES DETERMINING NODE NEIGHBORHOODS**). *For v in $G_k^k(v_0) \setminus \{v_0\}$, let $w := \phi(v)$. When `MAP` is called with parameters N_v and N_w (Algorithm 1 l. 14, p. 8), the numbers of nodes in $N_v[i]$ and $N_w[i]$ for $i \in [k + 1]_0$ are uniquely determined by two parameters:*

- (1) **position**: the position of the clusters $C(v)$ and $C(w)$ in the CT skeleton (internal or leaf), and
- (2) **history**: the outgoing labels of the arcs connecting $C(v)$ to $C(prev)$ and $C(w)$ to $C(\phi(prev))$, i.e., β^x and β^y if the corresponding arcs are $\langle (C(v), \beta^x), (C(prev), \beta^{x'}) \rangle$ and $\langle (C(w), \beta^y), (C(\phi(prev)), \beta^{y'}) \rangle$ for some $x', y' \in [k + 1]_0$.

Algorithm 1: Find an isomorphism $\phi : V(G_k^k(v_0)) \rightarrow V(G_k^k(v_1))$

```

1 Function FINDISOMORPHISM( $G_k, k, v_0, v_1$ ):
   Input:  $G_k$  conforming to  $CT_k$  with  $g \geq 2k + 1, k \in \mathbb{N}, v_0 \in C_0, v_1 \in C_1$ 
   Output: Isomorphism  $\phi : V(G_k^k(v_0)) \rightarrow V(G_k^k(v_1))$ 
2    $\phi \leftarrow$  empty map
3    $\phi(v_0) \leftarrow v_1$ 
4   WALK( $v_0, v_1, \perp, k$ )
5   return  $\phi$ 

6 Function WALK( $v, w, prev, depth$ ):
7   if  $depth = 0$  then
8     return
9    $N_v \leftarrow$  empty list of length  $k + 2$ 
10   $N_w \leftarrow$  empty list of length  $k + 2$ 
11  for  $i \leftarrow 0$  to  $k + 1$  do
12    // if edge  $\beta^i$  does not exist, the  $N_v[i]$  (resp.  $N_w[i]$ ) is empty
13     $N_v[i] \leftarrow$  list of new nodes  $v' \neq prev$  found using edge  $\beta^i$  from  $v$ 
14     $N_w[i] \leftarrow$  list of new nodes  $w' \neq \phi(prev)$  found using edge  $\beta^i$  from  $w$ 
15  MAP( $N_v, N_w$ )
16  for  $i \leftarrow 0$  to  $k + 1$  do
17    for  $v'$  in  $N_v[i]$  do
18      WALK( $v', \phi(v'), v, depth - 1$ )

18 Function MAP( $N_v, N_w$ ):
19  for  $i \leftarrow 0$  to  $k + 1$  do
20    // zip( $\cdot, \cdot$ ) yields element tuples until the shorter list ends
21    for  $v', w'$  in zip( $N_v[i], N_w[i]$ ) do
22       $\phi(v') \leftarrow w'$ 
23    // len( $\cdot$ ) returns the length of a list
24    if  $\exists i \in [k + 1]_0 : len(N_v[i]) \neq len(N_w[i])$  then
25       $i_v \leftarrow i \in [k + 1]_0 : len(N_v[i]) = len(N_w[i]) + 1$ 
26       $i_w \leftarrow i \in [k + 1]_0 : len(N_v[i]) + 1 = len(N_w[i])$ 
27      //  $L[i][-1]$  retrieves the last element from list  $i$  in  $L$ 
28       $\phi(N_v[i_v][-1]) \leftarrow N_w[i_w][-1]$ 

```

If v and w agree on position and history, $len(N_v[i]) = len(N_w[i])$ for all $i \in [k + 1]_0$. If v and w agree on position internal but disagree on history, we have $len(N_v[i]) = len(N_w[i])$ for all $i \in [k + 1]_0 \setminus \{x, y\}$, $len(N_v[x]) = len(N_w[y]) - 1$, and $len(N_v[y]) - 1 = len(N_w[x])$.

PROOF. If $u \in \{v, w\}$ has position *internal*, we know that $C(u)$ has outgoing labels $\{\beta^i \mid i \in [k]_0\}$ by the construction of the CT skeleton. Denoting by $z \in \{x, y\}$ the exponent of u 's history, we have that there are β^i nodes in $N_u[i]$ for $i \in [k]_0 \setminus \{z\}$, $\beta^z - 1$ nodes in $N_u[z]$ (as $prev$ or $\phi(prev)$ are removed, respectively), and zero nodes in $N_u[k + 1]$.

If u has position *leaf*, all nodes in N_u belong to the same cluster C' , u has β^z neighbors in this cluster, and $prev$ (resp. $\phi(prev)$) lies in this cluster as well. Hence, $len(N_u[z]) = \beta^z - 1$ and $len(N_u[i]) = 0$ for all $i \in [k + 1]_0 \setminus \{z\}$.

From these observations, the claims of the lemma follow immediately. \square

COROLLARY 3.17 (SUFFICIENT CONDITION FOR CORRECTNESS OF ALGORITHM 1). *Given a CT graph G_k with girth at least $2k + 1$, if all pairs of nodes created by MAP on which WALK is called recursively (i) agree on position and history or (ii) agree on position internal, Algorithm 1 (p. 8) produces an isomorphism between $G_k^k(v_0)$ and $G_k^k(v_1)$.*

PROOF. Note that Algorithm 1 (p. 8) produces an isomorphism between $G_k^k(v_0)$ and $G_k^k(v_1)$ if $\phi|_{N_v}$ (i.e., ϕ with its domain restricted to the neighborhood of v) is a bijection from N_v to $N_{\phi(v)}$ for all v in $G_k^k(v_0)$ with $d(v, v_0) < k$. For v_0 and $\phi(v_0) = v_1$, this holds because they both have β^i neighbors in the clusters connected to them via outgoing edge label β^i for $i \in [k]_0$, i.e., $\text{len}(N_v[i]) = \text{len}(N_w[i])$ for $i \in [k]_0$ (and $\text{len}(N_v[k+1]) = \text{len}(N_w[k+1]) = 0$). Hence, MAP ensures that $\phi(N_v) = N_w$. For nodes $v \neq v_0$ and $w := \phi(v)$ paired by MAP that agree on *position* and *history*, Lemma 3.16 (p. 7) shows that $\text{len}(N_v[i]) = \text{len}(N_w[i])$ for all $i \in [k+1]_0$, so again MAP succeeds. The last case is that v and w agree on position *internal*. In this case, applying Lemma 3.16 (p. 7) and noting that MAP takes care of the resulting mismatch in list lengths in Lines 22–25 proves that MAP succeeds here, too. \square

Recall that due to the inductive construction of CT_k , for all $i \in [k]$, we can view CT_i as a subgraph of CT_k by simply stripping away all clusters that were added after constructing CT_i . Recall also that $G_k^k(v_0)$ and $G_k^k(v_1)$ are trees, because the girth of G_k is at least $2k + 1$. Treating these trees as rooted at v_0 and v_1 , respectively, Algorithm 1 (p. 8) maps nodes at depth d in $G_k^k(v_0)$ to nodes at depth d in $G_k^k(v_1)$. The following notion will be useful:

Definition 3.18 (Node parent). For $v \in G_k^k(v_i)$, $i \in \{0, 1\}$, with $d(v_i, v) > 0$, the *parent* of v in $G_k^k(v_i)$, denoted $p_i(v)$, is the node through which v is discovered from v_i in Algorithm 1 (p. 8).

To ensure that the preconditions of Corollary 3.17 (p. 9) hold, we prove the following invariant of Algorithm 1 (p. 8):


Definition 3.19 (Main Invariant of Algorithm 1). For $0 < d < k$, suppose that v and $w := \phi(v)$ lie at distance d from v_0 and v_1 , respectively. Then exactly one of the following holds:

- (1) $C(v), C(w) \in CT_d$, and if v and w disagree on *history*, their histories are $\leq \beta^{d+1}$, or
- (2) there is some i with $d < i \leq k$ such that $C(v), C(w) \in CT_i \setminus CT_{i-1}$, v and w agree on *history*, and $C(p_0(v)), C(p_1(w)) \in CT_{i-1}$.


Note that in the first case, v and w agree on position *internal*, and in the second case, v and w agree on *position* and *history*. Thus, Theorem 3.14 (p. 7) readily follows from Corollary 3.17 (p. 9) once the invariant is established. The intuition of the invariant and its interplay with Corollary 3.17 (p. 9) are illustrated in Figure 3 (p. 10).

LEMMA 3.20 (MAIN INVARIANT HOLDS). *Algorithm 1 (p. 8) satisfies the invariant stated in Definition 3.19 (p. 9).*

PROOF. We prove the claim for fixed k by induction on d . For v and $w := \phi(v)$ at distance $d = 1$ from $v_0 = p_0(v)$ and $v_1 = p_1(w)$, respectively, v and w are matched in the initial call to WALK with v_0 and v_1 as arguments. In this call, $\text{len}(N_{v_0}[i]) = \text{len}(N_{v_1}[i])$ for all $i \in [k+1]_0$, i.e., only nodes corresponding to the same outgoing arc labels get matched. Inspecting CT_1 and taking into account the CT growth rules, we see that for $i \in \{0, 1\}$, the matched nodes lie in clusters that are present already in CT_1 and have outgoing labels of at most β^2 (i.e., the first case of the invariant holds), while for $i > 1 = d$, both nodes lie in clusters from $CT_i \setminus CT_{i-1}$ with outgoing labels of β^{i+1} (i.e., the second case of the invariant holds).

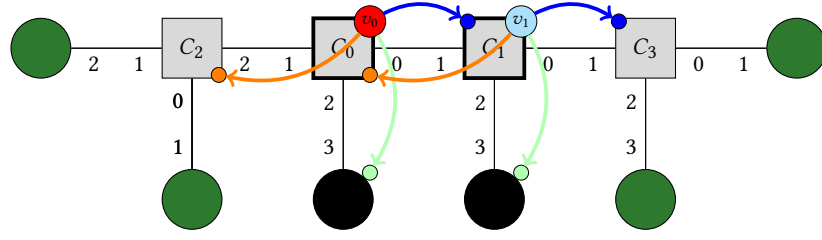

(a) $d = 1$ from v_0 and v_1 : for the blue nodes, the first case of the invariant holds *with* agreement on *history*; for the orange nodes, the first case of the invariant holds *without* agreement on *history*; and for the green nodes, the second case of the invariant holds.

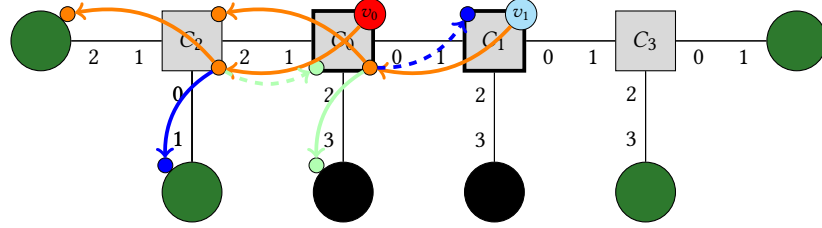

(b) $d = 2$ from orange nodes at distance $d = 1$: because the invariant holds for $d = 1$, Corollary 3.17 (p. 9) ensures that Algorithm 1 (p. 8) produces an isomorphism between $G_2^2(v_0)$ and $G_2^2(v_1)$.

Fig. 3. Illustration of Definition 3.19 (p. 9) for CT_2 . Cluster colors, shapes, and borders drawn as in Figure 2 (p. 5). Nodes $v_0 \in C_0$ and $v_1 \in C_1$ indicated as medium-size circles; representatives of nodes seen via a certain outgoing edge depicted as small circles and connected to their parents by arrows. Node and arrow colors show outgoing edge labels (e.g., blue nodes are seen via the outgoing edge β^0); dashed arrows indicate that $\beta^l - 1$, rather than β^l , nodes are discovered via the outgoing label indicated by the arrow color.

For the inductive step, assume that the invariant is established up to distance d for $1 \leq d < k - 1$, and consider v , $w := \phi(v)$ at distance $d + 1$ from v_0 and v_1 , respectively. We apply the invariant to $v' := p_0(v)$ and $w' := p_1(w)$ and distinguish between its two cases.

(1) Suppose that $C(v'), C(w') \in CT_d$ with *histories* that are identical or at most β^{d+1} . As $d < k$, v' and w' agree on position *internal*. By Lemma 3.16 (p. 7), the call to WALK on v' and w' thus satisfies that $\text{len}(N_{v'}[i]) = \text{len}(N_{w'}[i])$ for all $i \in [k + 1]_0 \setminus \{j, j'\}$, where $\beta^j, \beta^{j'}$ for $j, j' \leq d + 1$ are the histories of v' and w' , respectively. If $C(v) \in CT_{d+1}$, Lemma 3.16 (p. 7) entails that $v \in N_{v'}[i]$ for some $i \leq d + 1$, and WALK chooses $w = \phi(v)$ from $N_{w'}[i']$ for some $i' \leq d + 1$. Due to the CT growth rules, if $C(v'), C(w') \in CT_d$, then the incident arcs of $C(v')$ and $C(w')$ with outgoing labels of at most β^{d+1} lead to clusters in CT_{d+1} , and the history of nodes discovered by traversing these arcs is at most β^{d+2} . Hence, $C(v) \in CT_{d+1}$ entails that the first case of the invariant holds for v and w . If $C(v) \notin CT_{d+1}$, we have that $C(v) \in CT_i \setminus CT_{i-1}$ for some $i > d + 1$, yielding $\text{len}(N_{v'}[i]) = \text{len}(N_{w'}[i])$, and thus, $w \in N_{w'}[i]$. As $C(v')$ and $C(w')$ are internal clusters in CT_{d+1} , we can conclude that both $C(v)$ and $C(w)$ have been added to the cluster tree in the i^{th} construction step using growth rule 1. Hence, we get that $C(v), C(w) \in CT_i \setminus CT_{i-1}$ with v and w agreeing on *history* β^{i+1} , and since $C(v'), C(w') \in CT_d \subseteq CT_{i-1}$, the second case of the invariant holds for v and w .

(2) Assume that there is some i with $d < i \leq k$ such that $C(v'), C(w') \in CT_i \setminus CT_{i-1}$, v' and w' agree on *history*, and $C(p_0(v')), C(p_1(w')) \in CT_{i-1}$. Then $C(v')$ and $C(w')$ must have been attached to clusters $C(p_0(v'))$ and $C(p_1(w'))$ from CT_{i-1} with arc labels $(\beta^{j'}, \beta^{j'+1})$ for the same $j' \in [i]_0$, and $C(v')$ and $C(w')$ have no other neighboring clusters in CT_i . By the CT growth rules, v' and w' also agree on *position*, so $v \in N_{v'}[j]$ and $w \in N_{w'}[j]$ for the same $j \in [k + 1]_0$

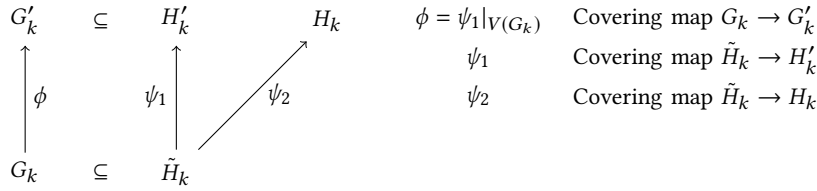


Fig. 4. Setup used to establish the existence of CT graphs with high girth.

by Lemma 3.16 (p. 7), and similarly, v and w agree on *history*. Hence, if $j \neq j' + 1$, then $C(v), C(w) \in CT_{i+1} \setminus CT_i$, and since $i + 1 > d + 1$ and $C(v'), C(w') \in CT_i$, the second case of the invariant holds for v and w . If $j = j' + 1$, by the above observations, $C(v) = C(p_0(v'))$ and $C(w) = C(p_1(w'))$. As WALK mapped v' to $\phi(v') =: w'$, we have that $p_0(v')$ was mapped to $\phi(p_0(v')) = p_1(w')$, where $p_0(v')$ and $p_1(w')$ lie at distance $d - 1$ from v_0 and v_1 , respectively. Applying the invariant to these nodes, the first case and the second case with $i \leq d + 1$ both imply that $C(v), C(w) \in CT_{d+1}$, establishing the first case of the invariant for v and w . And if the second case applies with $i > d + 1$, then the second case of the invariant holds for v and w . \square

PROOF OF THEOREM 3.14 (P. 7). Follows from the correctness of Algorithm 1 (p. 8) for CT graphs G_k with girth $\geq 2k + 1$, established via Lemma 3.20 (p. 9) and Corollary 3.17 (p. 9). \square

4 ENSURING HIGH GIRTH

To construct G_k with high girth, we rely on special *graph homomorphisms* called *graph lifts*:

Definition 4.1 (Graph homomorphism). Graph G_1 is *homomorphic* to graph G_2 if there is a function $\phi: V(G_1) \rightarrow V(G_2)$ s.t. $\{v, w\} \in E(G_1) \Rightarrow \{\phi(v), \phi(w)\} \in E(G_2)$ (i.e., ϕ is adjacency-preserving); ϕ is called a *homomorphism*.

Definition 4.2 (Graph lift). Graph G_1 is a *lift* of graph G_2 if there is a *surjective* homomorphism $\phi: V(G_1) \rightarrow V(G_2)$ s.t. $\forall v \in V(G_1): \{v, w\} \in E(G_1) \Leftrightarrow \{\phi|_{\Gamma(v)}(v), \phi|_{\Gamma(v)}(w)\} \in E(G_2)$ (i.e., ϕ is *locally* bijective); ϕ is called a *covering map*.

As sketched by Kuhn et al. [22], we establish the existence of a CT graph G_k with girth $g \geq 2k + 1$ and $O(\beta^{2k^2+4k+1})$ nodes using the setup illustrated in Figure 4 (p. 11). The intuition of this setup is that we obtain G_k as a subgraph of \tilde{H}_k , which is a common lift of a high-girth graph H_k and a graph H'_k that is a supergraph of a low-girth CT graph G'_k . Since taking lifts and subgraphs cannot decrease the girth,⁴ G_k then has large girth, and because G_k is a lift of G'_k , it conforms to CT_k . Table 1 (p. 12) gives an overview of the graphs involved in our setup, along with the properties we seek to establish.

4.1 Low-Girth Cluster Tree Graphs

We can easily design low-girth CT graphs by plugging together complete bipartite graphs.

Definition 4.3 (G'_k from complete bipartite graphs). For $k \in \mathbb{N}$ and a parameter $\beta \in \mathbb{N}$, let CT_k be the CT skeleton parametrized by β . We construct G'_k conforming to CT_k as follows:

- (1) For cluster C on level $l \in [k + 1]_0$ in CT_k , add β^{2k-l+1} nodes v with $C(v) = C$ to G_k .

⁴For subgraphs, this is obvious. For lifts, consider a cycle of length l in the lift and observe that a covering map must map it to a subgraph containing a cycle of length at most l .

Graph	Properties	Existence Proof
G'_k	CT graph, parametrized by β , $\beta^{O(k)}$ nodes, $\Delta = \beta^{k+1}$	Definition 4.3, Lemma 4.4
H'_k	Δ -regular, supergraph of G'_k , $\beta^{O(k)}$ nodes	Lemma 4.5, Corollary 4.7
H_k	Δ -regular, girth $g = 2k + 1$, $O(\Delta^{2k}) \subseteq \beta^{O(k^2)}$ nodes	Lemma 4.6, Corollary 4.7
\tilde{H}_k	Δ -regular, lift of H'_k and H_k , girth $g \geq 2k + 1$, $\beta^{O(k^2)}$ nodes	Lemma 4.8, Corollary 4.9
G_k	CT graph, subgraph of \tilde{H}_k , girth $g \geq 2k + 1$, $\beta^{O(k^2)}$ nodes	Theorem 4.10

Table 1. Proof overview for establishing the existence of CT graphs with high girth.

- (2) For clusters C and C' with $\langle(C, \beta^x), (C', \beta^{x+1})\rangle \in E(CT_k)$, connect the nodes representing these clusters in G_k using $\frac{|C|}{\beta^{x+1}}$ copies of $K_{\beta^x, \beta^{x+1}}$, the complete bipartite graph on $A \dot{\cup} B$ with $|A| = \beta^x$ and $|B| = \beta^{x+1}$.

LEMMA 4.4 (CT GRAPH STRUCTURE). *Graphs following Definition 4.3 (p. 11) are CT graphs.*

PROOF. As can be easily verified from the definition of CT_1 and the growth rules, in CT_k , all arcs are of the form $\langle(C, \beta^x), (C', \beta^{x+1})\rangle$ for some $x \in [k+1]_0$, where C is on level $\ell \in [k]_0$ and C' on level $\ell + 1$. By Definition 4.3 (p. 11), we thus have that $|C'| = \frac{|C|}{\beta}$. Now, $\frac{|C|}{\beta^{x+1}}$ copies of $K_{\beta^x, \beta^{x+1}}$ contain $\frac{|C|}{\beta^{x+1}} \cdot \beta^{x+1} = |C|$ nodes with degree β^x and $\frac{|C|}{\beta^{x+1}} \cdot \beta^x = \frac{|C|}{\beta} = |C'|$ nodes with degree β^{x+1} . Hence, using $\frac{|C|}{\beta^{x+1}}$ copies of $K_{\beta^x, \beta^{x+1}}$, we exactly fulfill the requirements imposed by CT_k on the connectivity between C and C' . \square

4.2 Regular Graphs with Desirable Properties

The construction from Definition 4.3 (p. 11) results in CT graphs of girth four. It remains to lift these low-girth graphs to high girth. First, we embed G'_k into a Δ -regular graph.

LEMMA 4.5 (Δ -REGULAR SUPERGRAPHS OF GENERAL GRAPHS). *Let G be a simple graph with maximum degree Δ . Then there exists a Δ -regular supergraph H of G with $|V(H)| < |V(G)| + 4\Delta$.⁵*

PROOF. Let $G = (V, E)$ with maximum degree Δ . We modify G to form H as follows. While there are nodes $v, w \in V$ with degree $\delta(v) < \Delta$, $\delta(w) < \Delta$, and $\{v, w\} \notin E$, we add $\{v, w\}$ to E . Let D be the set of remaining nodes with degree less than Δ . By construction, we know that the nodes in D form a clique of size at most Δ .

Now add a complete bipartite graph $K_{\Delta, \Delta}$ with node bipartition $\{l_i \mid i \in [\Delta]\} \dot{\cup} \{r_i \mid i \in [\Delta]\}$ and define Δ disjoint perfect matchings $M_i := \{\{l_x, r_y\} \mid (x - y) \bmod \Delta = i\}$. Assign to each $v \in D$ a unique such matching, remove the edges containing l_i for $i \in [(\Delta - \delta(v))/2]$, and connect all endpoints of these edges to v . Afterwards, nodes in D are missing at most one edge, while all other nodes have degree Δ . Next, arbitrarily match the nodes still missing edges. For each such pair $(v, w) \in D^2$, choose the remaining edge from the matching of v that contains l_Δ , remove it, connect w to l_Δ , and v to the other endpoint.

After this step, at most one node does not have degree Δ yet, and misses at most one edge. If this case occurs, Δ must be odd (otherwise, v would be the only node with odd degree, while the number of nodes with odd degree in any graph must be even). We complete the procedure by adding a copy of $K_{\Delta, \Delta-1}$, connecting v to one of the Δ nodes of degree $\Delta - 1$ in $K_{\Delta, \Delta-1}$, and adding a perfect matching between the remaining nodes of degree $\Delta - 1$ (whose number is even). The resulting graph H is a Δ -regular supergraph of G with $|V(H)| \leq |V(G)| + 4\Delta - 1$ nodes. \square

⁵ A bound of $|V(H)| \leq |V(G)| + \Delta + 2$ that is optimal in the worst case is shown in [1].

Next, we ensure that Δ -regular graphs of girth $2k + 1$ without too many nodes exist:

LEMMA 4.6 (Δ -REGULAR GRAPHS WITH PRESCRIBED GIRTH AND ORDER [11]). *For $2 \leq \Delta \in \mathbb{N}$ and $3 \leq g \in \mathbb{N}$, there exist Δ -regular graphs with girth at least g and $2m$ nodes for each $m \geq 2 \cdot \sum_{i=0}^{g-2} (\Delta - 1)^i$.*

PROOF. Fix g . The claim trivially holds for $\Delta = 2$, as any cycle of length $2m$ satisfies the requirements. Now assume that the claim holds for some $\Delta \geq 2$. Thus, for any $m \geq 2 \cdot \sum_{i=0}^{g-2} \Delta^i$, there exists a Δ -regular graph G with $2m \geq 4 \cdot \sum_{i=0}^{g-2} (\Delta - 1)^i$ nodes and girth at least $g \geq 3$. Now let G' be a graph satisfying the following conditions:

- (1) $|V(G')| = 2m$,
- (2) $\Delta \leq \delta(v) \leq \Delta + 1$ for all nodes $v \in V(G')$,
- (3) G' has girth at least g , and
- (4) $|E(G')|$ is maximal among all graphs (including G) that satisfy the other three conditions.

We show that G' is $(\Delta + 1)$ -regular. To this end, assume towards a contradiction that G' is *not* $(\Delta + 1)$ -regular. Then either G' has exactly one node with degree Δ or G' has at least two nodes v' and w' with degree Δ .

The first case cannot occur because it would require G' to have exactly one node of odd degree for $\Delta + 1$ even, and exactly $2m - 1$ nodes of odd degree for $\Delta + 1$ odd, contradicting the fact that in any graph, the number of nodes with odd degree must be even. So assume that there are at least two nodes v' and w' with degree Δ in G' . Observe that all nodes of degree Δ must lie within distance $g - 2$ of v' and w' , i.e., in $N := \Gamma^{g-2}(v') \cap \Gamma^{g-2}(w')$, as otherwise we could add an edge to G' without violating the first three properties, contradicting the fourth property. Since $|\Gamma^j(v)| \leq \sum_{i=0}^j \Delta^i$ for any node $v \in V(G')$ with $\delta(v) = \Delta$, we have $|N| \leq m$, and consequently, $|N| \leq |V(G')| - |N|$.

Now let $\{x, y\}$ be an edge between two nodes $x, y \in V(G') \setminus N$. We know such an edge must exist, because otherwise $(\Delta + 1) \cdot (|V(G')| - |N|)$ edges would need to run between nodes in $V(G') \setminus N$ and nodes in N , which would force $\delta(v) = \Delta + 1$ for all $v \in N$, contradicting the fact that $\delta(v') = \delta(w') = \Delta$. But then \tilde{G}' with $V(\tilde{G}') := V(G')$ and $E(\tilde{G}') := (E(G') \setminus \{x, y\}) \cup \{\{x, v\}, \{y, w\}\}$ is a graph with more edges than G' that satisfies the first three requirements (in particular, the new edge set does not introduce a cycle of length $< g$ since x and y lie at distance $\geq g - 1$ from v' and w'), contradicting the maximality of G' . Therefore, no node with degree Δ can exist in G' , i.e., G' must be $(\Delta + 1)$ -regular. \square

COROLLARY 4.7 (EXISTENCE OF H'_k AND H_k). *There exists a Δ -regular supergraph H'_k of G'_k with $O(|V(G'_k)|)$ nodes, and for $\Delta \geq 2$ and $g \geq 3$, there exists a Δ -regular graph H_k with girth $g = 2k + 1$ and $O(\Delta^{2k})$ nodes.*

PROOF. The existence of H'_k follows from Lemma 4.5 (p. 12) as a special case. The existence of H_k follows from Lemma 4.6 (p. 13) as a special case, noting that $4 \cdot \sum_{i=0}^{(2k+1)-2} \Delta^i = 4 \cdot \frac{\Delta^{2k} - 1}{\Delta - 1} \leq 4 \cdot \Delta^{2k} \in O(\Delta^{2k})$. \square

4.3 High-Girth Cluster Tree Graphs

Our final tool allows us to construct small common lifts of regular graphs:

LEMMA 4.8 (COMMON LIFTS OF Δ -REGULAR GRAPHS [2]). *Let H and H' be two Δ -regular graphs. Then there exists a graph \tilde{H} that is a lift of H and H' s.t. $|V(\tilde{H})| \leq 4|V(H)||V(H')|$.*

PROOF. By Hall's Theorem [17, 18], any regular bipartite graph has a perfect matching, and the edge set of a Δ -regular bipartite graph can be partitioned into Δ perfect matchings. For the special case that H and H' are both bipartite, let M_1, \dots, M_Δ and M'_1, \dots, M'_Δ be partitions of their respective edge sets into perfect matchings. We define \tilde{H} with

$V(\tilde{H}) = V(H) \times V(H')$ and $E(\tilde{H}) = \{(v, w), (v', w')\} \mid \exists i \in [\Delta]: \{v, v'\} \in M_i \wedge \{w, w'\} \in M'_i\}$. \tilde{H} has $|V(H)||V(H')|$ nodes, and for each $(v, w) \in V(\tilde{H})$ and $i \in [\Delta]$, there are unique $\{v, v'\} \in M_i$ and $\{w, w'\} \in M'_i$. Hence, (v, w) has Δ neighbors, and if these neighbors are $(v_1, w_1), \dots, (v_\Delta, w_\Delta)$, the neighbors of v in H are v_1, \dots, v_Δ , while the neighbors of w in H' are w_1, \dots, w_Δ . Therefore, \tilde{H} is a lift of H via $\phi_H : V(\tilde{H}) \rightarrow V(H)$ with $\phi_H((v, w)) = v$, and a lift of H' via $\phi_{H'} : V(\tilde{H}) \rightarrow V(H')$ with $\phi_{H'}((v, w)) = w$.

If a graph is not bipartite, we construct its canonical double cover, i.e., its tensor product with K_2 , to obtain a bipartite regular graph, with which we proceed as described above. The canonical double cover has twice as many nodes as the original graph, and we might need it for H and H' , so $|V(\tilde{H})| \leq 4|V(H)||V(H')|$. Further, if χ_H is covering map of the canonical double cover C of H , then \tilde{H} is a lift of H via $\phi_C \circ \chi_H$; analogously, \tilde{H} is a lift of H' . \square

COROLLARY 4.9 (EXISTENCE OF \tilde{H}_k). *There exists a Δ -regular common lift \tilde{H}_k of H_k and H'_k with girth $g \geq 2k + 1$ and $O(\beta^{2k^2+4k+1})$ nodes.*

PROOF. Recall that we start with G'_k as specified in Definition 4.3 (p. 11), parametrized by $\beta \geq 2k + 1$. By Lemma 3.13 (p. 6), G'_k has maximum degree $\Delta = \beta^{k+1}$, and by Lemma 3.12 (p. 6), G'_k has order $n < |C_0| \left(\frac{\beta}{\beta-(k+1)}\right) \leq 2|C_0| = 2\beta^{2k+1}$. We apply Lemma 4.5 (p.12) to obtain a Δ -regular supergraph H'_k of G'_k with $O(\beta^{2k+1})$ nodes. By Corollary 4.7 (p. 13), there also exists a Δ -regular graph H_k with girth $\geq 2k + 1$ and $|V(H_k)| \in O(\Delta^{2k}) = O(\beta^{2k^2+2k})$. Therefore, from Lemma 4.8 (p. 13) along with the observation that lifting cannot decrease girth, we can infer the existence of a graph \tilde{H}_k which is a lift of H_k and H'_k , has girth at least $2k + 1$, and satisfies $|V(\tilde{H}_k)| \leq 4|V(H_k)||V(H'_k)| \in O(\beta^{2k^2+4k+1})$. \square

Finally, we construct G_k as a subgraph of \tilde{H}_k :

THEOREM 4.10 (EXISTENCE OF G_k [22]). *There exists a graph G_k of girth $g \geq 2k + 1$ with $O(\beta^{2k^2+4k+1})$ nodes that conforms with CT_k .*

PROOF. By Corollary 4.9 (p. 14), there exists a graph \tilde{H}_k with girth $g \geq 2k + 1$ and $O(\beta^{2k^2+4k+1})$ nodes that is a common lift of H'_k and H_k . Now let ψ_1 be a covering map from \tilde{H}_k to H'_k . We construct G_k as a subgraph of \tilde{H}_k with $V(G_k) := \{v \in \tilde{H}_k \mid \psi_1(v) \in G'_k\}$ and $E(G_k) := \{(v, w) \mid v, w \in V(\tilde{H}_k) \wedge \{\psi_1(v), \psi_1(w)\} \in E(G'_k)\}$. Then $\phi := \psi_1|_{V(G_k)}$ is a covering map from G_k to G'_k . To see that G_k conforms with CT_k , observe that ϕ is indeed a bijection on node neighborhoods, and set $C(v) := C(\phi(v))$ for $v \in V(G_k)$. Hence, we can conclude that G_k is an $O(\beta^{2k^2+4k+1})$ -node graph of girth $g \geq 2k + 1$ (inherited from \tilde{H}_k), conforming to CT_k (inherited from G'_k). \square

5 LOWER BOUND ON MINIMUM VERTEX COVER APPROXIMATION

Definition 5.1 (Vertex cover). Given a finite, simple graph $G = (V, E)$, a *vertex cover* is a node subset $S \subseteq V$ meeting all edges, i.e., for each $\{v, w\} \in E$, $v \in S$ or $w \in S$. A *Minimum Vertex Cover (MVC)* is a vertex cover of minimum cardinality, and an α -approximate MVC is a vertex cover that is at most factor α larger than an MVC.

We begin by bounding the size of an MVC of any CT graph G_k . To this end, recall that n_0 is the number of nodes in C_0 , which we have shown to contain a large fraction of all nodes.

OBSERVATION 5.2 (SIZE OF AN MVC OF G_k). $|MVC| \leq n - n_0$.

PROOF. As C_0 is an independent set, $V(G_k) \setminus C_0$ is a vertex cover. \square

Due to the indistinguishability of nodes in C_0 and C_1 in G_k (Theorem 3.14, p. 7), we obtain the following requirement for the behavior of any k -round distributed algorithm:

LEMMA 5.3 (SIZE OF A COMPUTED VERTEX COVER). *On a CT graph G_k of girth at least $2k + 1$ with uniformly random node identifiers, in the worst case (in expectation), a k -round deterministic (randomized) MVC algorithm in the LOCAL model must select at least $\frac{n_0}{2}$ nodes.*

PROOF. Recall that a k -round LOCAL algorithm is a function f mapping k -hop subgraphs labeled by inputs, node identifiers, and, in case of a randomized algorithm, strings of unbiased independent random bits to outputs. Noting that the vertex cover task has no inputs, by Theorem 3.14 (p. 7), nodes in C_0 and C_1 are k -hop indistinguishable. Hence, restricting f to the k -hop subgraphs of nodes in $C_0 \cup C_1$, we get a function depending only on the node identifiers and random strings observed up to distance k in the (isomorphic) trees that constitute the k -hop subgraphs. Now assign the node identifiers uniformly at random (from the feasible range, drawn without repetition). By the above observations, the output of each node $v \in C_0 \cup C_1$ then depends on the random labeling of its k -hop subgraph only, which is drawn from the same distribution for each node. Thus, there is some $p \in [0, 1]$ such that for each $v \in C_0 \cup C_1$, the probability that v enters the vertex cover computed by the algorithm equals p . Now consider $v \in C_0$. By the construction of G_k , there is some edge $\{v, w\} \in E(G_k)$ such that $w \in C_1$. Because v or w must be in the vertex cover the algorithm computes, we have that $1 = P[v \text{ or } w \text{ are in the vertex cover}] \leq 2p$. By linearity of expectation, we conclude that the expected size of the vertex cover is at least $p|C_0 \cup C_1| \geq \frac{n_0}{2}$. \square

Choosing β appropriately, we arrive at the desired MVC lower bound:

THEOREM 5.4 (MVC LOWER BOUND). *In the family of graphs with at most n nodes and degrees of at most Δ , the worst-case (expected) approximation ratio α of a deterministic (randomized) k -round MVC algorithm in the LOCAL model satisfies $\alpha \in \min\{n^{\Omega(1/(k^2 \log k))}, \Delta^{\Omega(1/(k \log k))}\}$. In particular, achieving an (expected) approximation ratio $\alpha \in \log^{O(1)} \min\{n, \Delta\}$ requires $k \in \Omega(\min\{\sqrt{\log n / \log \log n}, \log \Delta / \log \log \Delta\})$ communication rounds.*

PROOF. Given any $\alpha > 1$, fix $\beta := 4(k+1)\alpha$. By Theorem 4.10 (p. 14), CT graphs of girth $2k+1$ with $O(\beta^{2k^2+4k+1}) \subseteq 2^{O(k^2(\log k + \log \alpha))}$ nodes exist, which by Lemma 3.13 (p. 6) have maximum degree $\Delta = \beta^{k+1} \in 2^{O(k(\log k + \log \alpha))}$. We need these bounds to be smaller than n and Δ , respectively. As we want to show an asymptotic bound for α , we may assume that n and Δ are sufficiently large constants. Hence, it is sufficient to satisfy the constraints $\alpha \leq 2^{ck^{-2} \log n - \log k}$ and $\alpha \leq 2^{ck^{-1} \log \Delta - \log k}$, respectively, where $c > 0$ is a sufficiently small constant. For $k \leq \frac{c}{2} \cdot \min\{\sqrt{\log n / \log \log n}, \log \Delta / \log \log \Delta\}$, the $\log k$ terms are dominated and the constraints are met for $\alpha \in \min\{n^{\Omega(1/(k^2 \log k))}, \Delta^{\Omega(1/(k \log k))}\}$.

In particular, $k \in \omega(\min\{\sqrt{\log n / \log \log n}, \log \Delta / \log \log \Delta\})$ enables us to choose $\alpha = \min\{\log^{\omega(1)} n, \log^{\omega(1)} \Delta\}$. Hence, if we can show that for any (feasible) choice of α and graph G_k conforming to CT_k for parameter $\beta = 4(k+1)\alpha$ and girth $2k+1$, any algorithm in the LOCAL model has approximation ratio at least α in the worst case (in expectation), the claim of the theorem follows. To see this, note that G_k contains a vertex cover of size $n - n_0$ by Observation 5.2 (p. 14) and any k -round algorithm selects at least $\frac{n_0}{2}$ nodes (in expectation) under uniformly random node identifiers by Lemma 5.3 (p. 15). By Lemma 3.12 (p. 6), this results in an (expected) approximation ratio of at least $\frac{n_0}{2(n-n_0)} \geq \frac{\beta}{4(k+1)} = \alpha$. \square

REFERENCES

- [1] Jin Akiyama, Hiroshi Era, and Frank Harary. Regular graphs containing a given graph. *Elemente der Mathematik*, 38:15–17, 1983.
- [2] Dana Angluin and A. Gardiner. Finite common coverings of pairs of regular graphs. *Journal of Combinatorial Theory, Series B*, 30(2):184–187, 1981.

- [3] Alkida Balliu, Sebastian Brandt, Juho Hirvonen, Dennis Olivetti, Mikael Rabie, and Jukka Suomela. Lower bounds for maximal matchings and maximal independent sets. In *60th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2019, Baltimore, Maryland, USA, November 9-12, 2019*, pages 481–497, 2019.
- [4] Alkida Balliu, Sebastian Brandt, Dennis Olivetti, and Jukka Suomela. Almost Global Problems in the LOCAL Model. In Ulrich Schmid and Josef Widder, editors, *32nd International Symposium on Distributed Computing (DISC 2018)*, volume 121 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 9:1–9:16, Dagstuhl, Germany, 2018. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik.
- [5] Alkida Balliu, Juho Hirvonen, Janne H. Korhonen, Tuomo Lempiäinen, Dennis Olivetti, and Jukka Suomela. New classes of distributed time complexity. In *Proceedings of the 50th Annual ACM SIGACT Symposium on Theory of Computing, STOC 2018*, pages 1307–1318, New York, NY, USA, 2018. ACM.
- [6] Reuven Bar-Yehuda, Keren Censor-Hillel, Mohsen Ghaffari, and Gregory Schwartzman. Distributed approximation of maximum independent set and maximum matching. In *Proceedings of the ACM Symposium on Principles of Distributed Computing, PODC '17*, pages 165–174, New York, NY, USA, 2017. ACM.
- [7] Reuven Bar-Yehuda, Keren Censor-Hillel, and Gregory Schwartzman. A distributed $(2+\epsilon)$ -approximation for vertex cover in $O(\log \Delta/\epsilon \log \log \Delta)$ rounds. In *Proceedings of the 2016 ACM Symposium on Principles of Distributed Computing, PODC '16*, pages 3–8, New York, NY, USA, 2016. ACM.
- [8] Sebastian Brandt, Orr Fischer, Juho Hirvonen, Barbara Keller, Tuomo Lempiäinen, Joel Rybicki, Jukka Suomela, and Jara Uitto. A lower bound for the distributed Lovász local lemma. In *Proceedings of the Forty-Eighth Annual ACM Symposium on Theory of Computing, STOC '16*, pages 479–488, New York, NY, USA, 2016. Association for Computing Machinery.
- [9] Yi-Jun Chang, Qizheng He, Wenzheng Li, Seth Pettie, and Jara Uitto. The complexity of distributed edge coloring with small palettes. In *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2018, New Orleans, LA, USA, January 7-10, 2018*, pages 2633–2652, 2018.
- [10] Andrzej Czygrinow, Michał Hańcówki, and Wojciech Wawrzyniak. Fast distributed approximations in planar graphs. In *Proceedings of the 22nd International Symposium on Distributed Computing, DISC '08*, pages 78–92, Berlin, Heidelberg, 2008. Springer-Verlag.
- [11] Paul Erdős and Horst Sachs. Reguläre graphen gegebener taillenweite mit minimaler knotenzahl. *Wiss. Z. Martin-Luther-Univ. Halle-Wittenberg Math.-Natur. Reihe*, 12(3):251–257, 1963.
- [12] Laurent Feuilloley, Pierre Fraigniaud, and Juho Hirvonen. A Hierarchy of Local Decision. In Ioannis Chatzigiannakis, Michael Mitzenmacher, Yuval Rabani, and Davide Sangiorgi, editors, *43rd International Colloquium on Automata, Languages, and Programming (ICALP 2016)*, volume 55 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 118:1–118:15, Dagstuhl, Germany, 2016. Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik.
- [13] Pierre Fraigniaud, Amos Korman, and David Peleg. Towards a complexity theory for local distributed computing. *J. ACM*, 60(5):35:1–35:26, October 2013.
- [14] Mohsen Ghaffari, Fabian Kuhn, and Yannic Maus. On the complexity of local distributed graph problems. In *Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing, STOC 2017*, pages 784–797, New York, NY, USA, 2017. ACM.
- [15] Mika Göös, Juho Hirvonen, and Jukka Suomela. Lower bounds for local approximation. *J. ACM*, 60(5):39:1–39:23, October 2013.
- [16] Mika Göös, Juho Hirvonen, and Jukka Suomela. Linear-in- Δ lower bounds in the local model. *Distributed Computing*, 30(5):325–338, 2017.
- [17] P. Hall. On representatives of subsets. *Journal of the London Mathematical Society*, s1-10(1):26–30, 1935.
- [18] Dénes König. Über graphen und ihre anwendung auf determinantentheorie und mengenlehre. *Mathematische Annalen*, 77(4):453–465, Dec 1916.
- [19] Fabian Kuhn, Thomas Moscibroda, and Roger Wattenhofer. What cannot be computed locally! In *Proceedings of the Twenty-third Annual ACM Symposium on Principles of Distributed Computing, PODC '04*, pages 300–309, New York, NY, USA, 2004. ACM.
- [20] Fabian Kuhn, Thomas Moscibroda, and Roger Wattenhofer. The price of being near-sighted. In *Proceedings of the Seventeenth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA '06*, pages 980–989, Philadelphia, PA, USA, 2006. Society for Industrial and Applied Mathematics.
- [21] Fabian Kuhn, Thomas Moscibroda, and Roger Wattenhofer. Local computation: Lower and upper bounds. *CoRR*, abs/1011.5470, 2010. URL: <http://arxiv.org/abs/1011.5470>, arXiv:1011.5470.
- [22] Fabian Kuhn, Thomas Moscibroda, and Roger Wattenhofer. Local computation: Lower and upper bounds. *J. ACM*, 63(2):17:1–17:44, March 2016.
- [23] Juhana Laurinharju and Jukka Suomela. Brief announcement: Linial’s lower bound made easy. In *Proceedings of the 2014 ACM Symposium on Principles of Distributed Computing, PODC '14*, pages 377–378, New York, NY, USA, 2014. Association for Computing Machinery.
- [24] Christoph Lenzen and Roger Wattenhofer. Leveraging linial’s locality limit. In *Proceedings of the 22nd International Symposium on Distributed Computing, DISC '08*, pages 394–407, Berlin, Heidelberg, 2008. Springer-Verlag.
- [25] Nathan Linial. Locality in distributed graph algorithms. *SIAM Journal on Computing*, 21(1):193–201, 1992.
- [26] Moni Naor and Larry Stockmeyer. What can be computed locally? *SIAM J. Comput.*, 24(6):1259–1277, December 1995.
- [27] Alessandro Panconesi and Romeo Rizzi. Some simple distributed algorithms for sparse networks. *Distrib. Comput.*, 14(2):97–100, April 2001.
- [28] David Peleg. *Distributed Computing: A Locality-Sensitive Approach*. Society for Industrial and Applied Mathematics, Philadelphia, PA, 2000.
- [29] Jukka Suomela. Survey of local algorithms. *ACM Comput. Surv.*, 45(2):24:1–24:40, March 2013.
- [30] Jukka Suomela. Distributed algorithms (online textbook), 2019. URL: <https://users.ics.aalto.fi/suomela/da/>.

A FURTHER PRELIMINARIES

A.1 General Notation

Symbol	Definition	Meaning
$[k]$	$:= \{i \in \mathbb{N} \mid i \leq k\}$	Set of positive integers not larger than k
$[k]_0$	$:= \{i \in \mathbb{N}_0 \mid i \leq k\}$	Set of nonnegative integers not larger than k
G	$:= (V(G), E(G))$	Graph G with node set $V(G)$ and edge set $E(G)$
$G[S]$	$:= (S, E[S]),$ $E[S] := \{\{v_i, v_j\} \in E \mid v_i, v_j \in S\}$	Subgraph of G induced by $S \subseteq V(G)$
n_G	$:= V(G) $	Number of nodes in G (order of G)
m_G	$:= E(G) $	Number of edges in G (size of G)
$\Gamma_G(v)$	$:= \{w \in V(G) \mid \{v, w\} \in E(G)\}$	Neighborhood of v in G (as a node set)
$\delta_G(v)$	$:= \Gamma_G(v) $	Degree of v in G
Δ_G	$:= \max\{\delta(v) \mid v \in V(G)\}$	Largest degree of a node $v \in V(G)$
$p_G(u, w)$	$:= (\{v_0, v_1\}, \{v_1, v_2\}, \dots, \{v_{k-1}, v_k\}),$ $v_0 = u, v_k = w, \{v_i, v_{i+1}\} \in E$ $\forall i \in [k-1]_0$	A path from u to w in G
$d_G(u, w)$	$:= \min\{i \mid \exists p(u, w): p(u, w) = i\}$	Distance between node u and node w in G (∞ if there exists no path between u and w)
$d_G(u, e)$	$:= \min\{i \mid \exists w, p(u, w):$ $ p(u, w) = i \wedge e \in p(u, w)\}$	Distance between node u and edge e in G (∞ if there exists no path between u and e)
g_G	$:= \min\{i > 0 \mid \exists v, p(v, v): p(v, v) = i\}$	Girth of G (length of its shortest cycle)
$\Gamma_G^k(v)$	$:= \{w \in V(G) \mid d(v, w) \leq k\}$	k -hop neighborhood of a node v in G (\rightarrow Definition 2.1)
$G^k(v)$	$:= G[\Gamma^k(v)] \setminus \{\{w, u\} \in E(G) \mid$ $\min\{d(v, w), d(v, u)\} \geq k\}$	k -hop subgraph of a node v in G (\rightarrow Definition 2.2)
$G_1 \subseteq G_2$	$\Leftrightarrow V(G_1) \subseteq V(G_2) \wedge E(G_1) \subseteq E(G_2)$	Subgraph relationship between G_1 and G_2
$G_1 \cong G_2$	$\Leftrightarrow \exists \phi: V(G_1) \rightarrow V(G_2)$ bijective s.t. $\{v, w\} \in E(G_1)$ $\Leftrightarrow \{\phi(v), \phi(w)\} \in E(G_2)$	Graph isomorphism between G_1 and G_2

Table 2. General notation used in this work (subscript or parenthesized G may be omitted when clear from context).

A.2 The LOCAL Model

Our presentation of the LOCAL model follows Peleg [28]. The LOCAL model is a highly stylized model of network communication designed to capture the locality of distributed computing. In this model, a communication network is abstracted as a simple graph $G = (V, E)$, with nodes representing network devices and edges representing bidirectional communication links. To eliminate all computability restrictions that are not related to locality, the model makes the following assumptions:

- Network devices have unique identifiers and unlimited computation power.
- Communication links have infinite capacity.
- Computation and communication takes place in synchronous rounds.
- All network devices start computing and communicating at the same time.
- There are no faults.

In each round, a node can

- (1) perform an internal computation based on its currently available information,

- (2) send messages to its neighbors,
- (3) receive all messages sent by its neighbors, and
- (4) potentially terminate with some local output.

A k -round distributed algorithm in the LOCAL model can be interpreted as a function from k -hop subgraphs to local outputs:

Definition A.1 (k-round distributed algorithm). A k -round distributed algorithm \mathcal{A} is a function mapping k -hop subgraphs $G^k(v)$, labeled by unique node identifiers (and potentially some local input), to local outputs. For a randomized algorithm, nodes are also labeled by (sufficiently long) strings of independent, unbiased random bits.

We assume that at the start of the algorithm, nodes do *not* know their incident edges.

B FURTHER LOWER BOUNDS

Definition B.1 (Fundamental graph problems). Given a finite, simple graph $G = (V, E)$,

- **Minimum Vertex Cover (MVC)** ... find a minimum vertex subset $S \subseteq V$ s.t. $\forall \{u, v\} \in E : u \in S \vee v \in S$.
- **Minimum Dominating Set (MDS)** ... find a minimum vertex subset $S \subseteq V$ s.t. $\forall v \in V : v \in S \vee \exists u \in S : \{u, v\} \in E$.
- **Maximum Matching (MaxM)** ... find a maximum edge subset $T \subseteq E$ s.t. $\forall e_1, e_2 \in T : e_1 \cap e_2 = \emptyset$.
- **Maximal Matching (MM)** ... find an inclusion-maximal edge subset $T \subseteq E$ s.t. $\forall e_1, e_2 \in T : e_1 \cap e_2 = \emptyset$.
- **Maximal Independent Set (MIS)** ... find an inclusion-maximal vertex subset $S \subseteq V$ s.t. $\forall u, v \in S : \{u, v\} \notin E$.

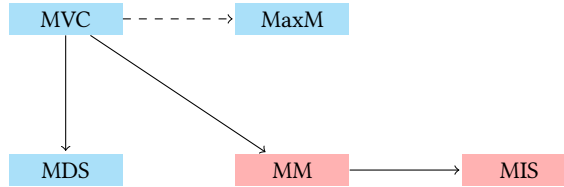


Fig. 5. Relationships between the lower bounds derived for fundamental graph problems (adapted from [22]). Optimization problems marked blue; binary problems marked red. Solid arrows indicate reductions; dashed arrows indicate analogy.

B.1 Minimum Dominating Set (MDS)

THEOREM B.2 (MDS LOWER BOUND). *The best approximation ratio a k -round deterministic (randomized) MDS algorithm in the LOCAL model can achieve is $\alpha \in n^{\Omega(1/k^2)}/k$ and $\alpha \in \Omega(\Delta^{\frac{1}{k+1}}/k)$. Hence, to obtain an approximation ratio polylogarithmic in n or Δ , in the worst case (in expectation) an algorithm needs to run for $k \in \Omega(\sqrt{\log n / \log \log n})$ or $k \in \Omega(\log \Delta / \log \log \Delta)$ rounds, respectively.*

PROOF. Observe that a vertex cover VC of any graph G can be transformed into a dominating set DS of its line graph $L(G)$ without increasing its cardinality by adding one edge $\{v, w\} \in V(L(G))$ for every node $v \in V(G)$. Similarly, a dominating set of $L(G)$ can be turned into a vertex cover of G by adding the nodes v, w for all $\{v, w\} \in DS(L(G))$, at most doubling its size. Therefore, in general, MVC and MDS are equivalent up to a factor of two in the approximation ratio. Now consider a CT graph G_k and its line graph $L(G_k)$. In the LOCAL model of computation, a k -round computation on the line graph can be simulated in $k+1$ rounds on the original graph, i.e., G_k and $L(G_k)$ have the same locality properties.

Hence, up to a factor of two in the approximation ratio, MVC and MDS are equivalent also in our computational model. The stated bounds hence follow analogously to Theorem 5.4 (p. 15). \square

B.2 Maximum Matching (MaxM)

Here, we are dealing with a packing problem, rather than a covering problem, and we are asked to select edges, rather than nodes. Therefore, instead of using a reduction from MVC, we amend the CT graph construction to allow for *edge* indistinguishability arguments:

Definition B.3 (k-hop edge indistinguishability). Two edges $\{v, w\}$ and $\{v', w'\}$ are k -hop indistinguishable if there exists an isomorphism $\phi : V(G^k(\{v, w\})) \rightarrow V(G^k(\{v', w'\}))$ with $\phi(v) = v'$ and $\phi(w) = w'$, where $G^k(\{v, w\}) := G^k(\{v\}) \cup G^k(\{w\})$ and $G^k(\{v', w'\}) := G^k(\{v'\}) \cup G^k(\{w'\})$.

THEOREM B.4 (MAXM LOWER BOUND). *The best approximation ratio a k -round deterministic (randomized) MaxM algorithm in the LOCAL model can achieve is $\alpha \in n^{\Omega(1/k^2)}/k$ and $\alpha \in \Omega(\Delta^{\frac{1}{k+1}}/k)$. Hence, to obtain an approximation ratio polylogarithmic in n or Δ , in the worst case (in expectation) an algorithm needs to run for $k \in \Omega(\sqrt{\log n / \log \log n})$ or $k \in \Omega(\log \Delta / \log \log \Delta)$ rounds, respectively.*

PROOF. We create a hard graph H_k from two low-girth copies of G_k , G'_k and \bar{G}'_k , by first adding a perfect matching to connect each node from G'_k with its counterpart in \bar{G}'_k to form a low-girth graph H'_k , and then lifting H'_k to high girth using the construction detailed in Section 4 to obtain H_k with high girth.⁶ Figure 6 (p. 20) illustrates the idea. We refer to the part of H_k corresponding to G'_k as G_k and to the part of H_k corresponding to \bar{G}'_k as \bar{G}_k .

Since G_k and \bar{G}_k are high-girth CT graphs, all nodes in the clusters C_0 , \bar{C}_0 , C_1 , and \bar{C}_1 —and hence, the endpoints of edges $\{v_0, v_1\}$, $\{v_0, \bar{v}_0\}$, $\{\bar{v}_0, \bar{v}_1\}$, and $\{v_1, \bar{v}_1\}$ (where $v_i \in C_i$ and $\bar{v}_i \in \bar{C}_i$ for $i \in \{1, 2\}$)—have isomorphic k -hop subgraphs if the matching is not added before the lift. In H_k , each node from G_k has $1 = \beta^0$ additional neighbor in the copy of its own cluster in \bar{G}_k . Since H_k has high girth, however, the k -hop subgraphs of nodes in C_0 , \bar{C}_0 , C_1 , and \bar{C}_1 are still k -hop indistinguishable, and an isomorphism $\phi : V(G^k(\{v_0, v_1\})) \rightarrow V(G^k(\{v_0, \bar{v}_0\}))$ ($\phi : V(G^k(\{\bar{v}_0, \bar{v}_1\})) \rightarrow V(G^k(\{v_1, \bar{v}_1\}))$) can map nodes from these clusters onto each other as needed to satisfy the requirements of Definition B.3 (we could again define an algorithm analogous to Algorithm 1, p. 8, to construct this isomorphism explicitly). It follows that the edges running between C_0 and C_1 (\bar{C}_0 and \bar{C}_1) are k -hop edge indistinguishable from the edges running between C_0 and \bar{C}_0 (C_1 and \bar{C}_1).

Now consider a node $v \in C_0$ and the set E_v of $\beta + 1$ pairwise indistinguishable edges that have v as an endpoint. To guarantee a valid matching, a deterministic algorithm operating on a labeling chosen uniformly at random must ensure $\sum_{e \in E_v} p(e) \leq 1$, so each edge e (including the edge running from v to $v' \in \bar{C}_0$) must be selected into the matching with probability $p(e) \leq \frac{1}{\beta + 1}$. Consequently, the expected number of edges contributed to the matching by edges running between C_0 and \bar{C}_0 is $\mathbb{E}[|M(C_0, \bar{C}_0)_D|] \leq \frac{n_0}{\beta + 1}$ by linearity of expectation. To obtain a feasible matching, the number of edges in the matching without an endpoint in $C_0 \cup \bar{C}_0$ can be at most $2n - 2n_0$, where $n := |V(G_k)|$ and $n_0 := |C_0|$. It follows that there exists at least one labeling for which a k -round deterministic algorithm produces a matching with

$$|M_D| \leq \frac{n_0}{\beta + 1} + 2n - 2n_0 \leq n_0 \cdot \frac{4(k + 1) + 1}{\beta} \in \mathcal{O}\left(n \cdot \frac{k}{\beta}\right),$$

⁶This idea appears already in [20], but the construction differs from the one presented here in that all powers of β are shifted by one, e.g., nodes in C_0 have β^1 , rather than β^0 , neighbors in C_1 .

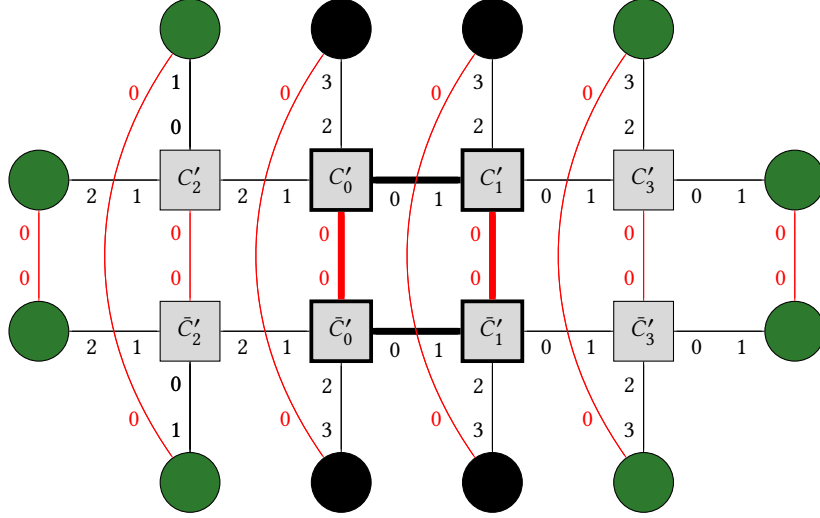


Fig. 6. Construction of H'_2 from G'_2 and \tilde{G}'_2 ; edges corresponding to the perfect matching between nodes in G'_2 and \tilde{G}'_2 are marked red. The edges represented by the thickened lines are 2-hop indistinguishable in H_2 .

where in the second to last step we applied Lemma 3.12 (p. 6) to bound $n - n_0$. With $\mathbb{E}[|M_R|] \leq \mathbb{E}[|M_D|]$ from Yao's principle, the bound generalizes to k -round randomized algorithms.

To see that this enforces the approximation ratios stated above, observe that the maximum matching for H_k has cardinality n by construction, i.e., $\alpha \in \Omega(\frac{\beta}{k})$. The trade-offs between running time and approximation ratio in terms of n and Δ now follow analogously to the proof of Theorem 5.4 (p. 15), noting that the increase of factor 2 in the number of nodes and additive 1 in node degrees has no asymptotic effect. \square

B.3 Maximal Matching (MM)

We start by establishing the lower bound in the deterministic setting by exploiting the relationship between MM and MVC:

THEOREM B.5 (MM LOWER BOUND FOR DETERMINISTIC ALGORITHMS). *Any deterministic MM algorithm needs to run for $k \in \Omega(\min\{\sqrt{\log n / \log \log n}, \log \Delta / \log \log \Delta\})$ in the worst case.*

PROOF. Since taking the endpoints of a maximal matching yields a 2-approximation of MVC, the claim follows immediately from the bounds established in Theorem 5.4 (p. 15). \square

For the randomized setting, we do not obtain the same bounds as in Theorem 5.4 (p. 15) immediately. The reason is that randomized algorithms for binary problems lend themselves to Las Vegas algorithms, whereas randomized algorithms for optimization problems lend themselves to Monte Carlo algorithms. We establish the bounds for the randomized setting by showing how a randomized MM algorithm that operates in T rounds in expectation can be used to compute an $O(1)$ approximation in expectation for MVC in $2T + 2$ rounds:

THEOREM B.6 (MM LOWER BOUND FOR RANDOMIZED ALGORITHMS). *In expectation, to find a solution, any randomized MM algorithm needs to run for $k \in \Omega(\sqrt{\log n / \log \log n})$ and $k \in \Omega(\log \Delta / \log \log \Delta)$ rounds.*

PROOF. Let \mathcal{A}_M be an MM algorithm with expected time complexity T , running on some graph $G = (V, E)$ with maximum degree Δ . The following MVC approximation algorithm \mathcal{A}_{VC} runs with fixed time complexity $2T + 2$:

- (1) For a sufficiently large constant c , execute $c \ln \Delta$ independent runs i of the following in parallel:
 - (a) All nodes simulate \mathcal{A}_M for $2T$ rounds.
 - (b) If E_M is the edge set selected after these rounds, every node that is incident with more than one selected edge removes *all* selected incident edges from E_M in an additional round of communication.
 - (c) All nodes (locally) output the endpoints of all edges remaining in E_M as $V'_{VC,i}$.
- (2) Define $x_v := 6 \cdot \frac{| \{i | v \in V'_{VC,i}\} |}{c \ln \Delta}$, and set $V_{VC} := \{v \in V \mid x_v \geq 1\}$.
- (3) All nodes communicate whether they are in V_{VC} , and nodes with a remaining uncovered edge join V_{VC} .

The final step ensures that the algorithm returns a vertex cover.

To see that not too many nodes are selected in expectation, observe first that by construction, $V'_{VC,i}$ is a matching for each i . Therefore, we have that $\sum_{v \in V(G)} x_v \leq 6 \cdot 2 \cdot |MVC|$, where MVC is a minimum vertex cover. As only nodes with $x_v \geq 1$ are selected in Step 2, the total number of nodes selected in this step is (deterministically) at most $12 \cdot |MVC|$.

It remains to bound the expected number of nodes selected in Step 3. To this end, observe that by Markov's bound, each independent run of \mathcal{A}_M yields a maximal matching with probability $\geq \frac{1}{2}$, and hence, each $V'_{VC,i}$ forms a VC with that same probability. Whenever this is the case, $V'_{VC,i}$ contains at least one endpoint of each edge $\{v, w\} \in E$. Hence, if at least one third of all runs are successful, we have $x_v + x_w \geq 2$ for all edges $\{v, w\} \in E$, and V_{VC} is a vertex cover already at the end of Step 2. Letting X be sum of the independent and identically distributed Bernoulli variables X_i indicating whether run i is successful, we have $\mathbb{E}[X] \geq \frac{c \ln \Delta}{2}$. Using a Chernoff bound, we can then bound the probability to have less than $\frac{c \ln \Delta}{3}$ runs in which $V'_{VC,i}$ forms a VC as

$$\mathbb{P}\left[X < \frac{c \ln \Delta}{3}\right] \leq \mathbb{P}\left[X \leq \left(1 - \frac{1}{3}\right) \frac{c \ln \Delta}{2}\right] \leq e^{-\frac{(\frac{1}{3})^2 \cdot c \ln \Delta}{4}} = e^{-\frac{c \ln \Delta}{36}} = \frac{1}{\Delta^{\frac{c}{36}}}.$$

Hence, for $c \geq 36$, the probability that V_{VC} is not a VC after Step 2 is $\leq \frac{1}{\Delta}$. Therefore, with probability at least $1 - 1/\Delta$, no further nodes are added in Step 3 of the algorithm. Otherwise, i.e., with probability at most $1/\Delta$, we add no more than $2|E(G)|$ nodes. Given that any vertex cover must contain at least $|E(G)|/\Delta$ nodes, we conclude that the expected size of the VC computed via the procedure described above is at most

$$12 \cdot |MVC| + \frac{1}{\Delta} \cdot 2\Delta \cdot |MVC| = 14 \cdot |MVC|.$$

Thus, a randomized MM algorithm beating the stated bounds would imply an MVC algorithm beating the bounds from Theorem 5.4 (p. 15). Since such an MVC algorithm cannot exist, the stated bounds must hold.⁷ \square

B.4 Maximal Independent Set (MIS)

We establish our last lower bound via reduction from MM:

THEOREM B.7 (MIS LOWER BOUND). *In the worst case (in expectation), to find a solution, any deterministic (randomized) MIS algorithm needs to run for $k \in \Omega(\sqrt{\log n / \log \log n})$ or $k \in \Omega(\log \Delta / \log \log \Delta)$ rounds.*

PROOF. Observe that an MM of G_k is an MIS of the line graph $L(G_k)$, and that a k -round MIS computation on $L(G_k)$ can be simulated in $k + 1$ rounds on G_k . Furthermore, $n_{L(G_k)} \leq n_{G_k}^2 / 2$, and $\Delta_{L(G_k)} \leq 2\Delta_{G_k}$. As $\log n \in$

⁷In [22], the size of the VC computed in Step 2 is bounded as $\leq 10 \cdot |MVC|$ without explanation, and an expected VC size of $\leq 11 \cdot |MVC|$ is derived.

$\Theta(\log(n^2/2))$, an MIS algorithm beating the stated bounds on $L(G_k)$ would imply an MM algorithm beating the bounds from Theorems B.5 or B.6 (pp. 20 et seq.). It follows that the stated bounds must hold also for MIS. \square