

CompMix: A Benchmark for Heterogeneous Question Answering

Philipp Christmann
Max Planck Institute for Informatics
Saarbruecken, Germany
pchristm@mpi-inf.mpg.de

Rishiraj Saha Roy
Max Planck Institute for Informatics
Saarbruecken, Germany
rishiraj@mpi-inf.mpg.de

Gerhard Weikum
Max Planck Institute for Informatics
Saarbruecken, Germany
weikum@mpi-inf.mpg.de

ABSTRACT

Fact-centric question answering (QA) often requires access to multiple, heterogeneous, information sources. By jointly considering several sources like a knowledge base (KB), a text collection, and tables from the web, QA systems can enhance their answer coverage and confidence. However, existing QA benchmarks are mostly constructed with a single source of knowledge in mind. This limits capabilities of these benchmarks to fairly evaluate QA systems that can tap into more than one information repository. To bridge this gap, we release COMP MIX, a crowdsourced QA benchmark which naturally demands the integration of a mixture of input sources. COMP MIX has a total of 9,410 questions, and features several complex intents like joins and temporal conditions. Evaluation of a range of QA systems on COMP MIX highlights the need for further research on leveraging information from heterogeneous sources.

1 INTRODUCTION

Motivation. The goal in factual question answering (QA) is to derive crisp answers to information needs issued by end users [31]. There has been a long line of research on fact-based QA, that can largely be divided into three main directions: (i) methods that use a large curated knowledge base (KB) like Wikidata [41], YAGO [35] or DBpedia [2] as information source (KB-QA) [1, 3, 5, 40], (ii) systems that retrieve information from a text corpus (text-QA) [9, 20, 48], and (iii) works that answer questions based on a set of web tables (table-QA) [8, 19, 21]. Each of these directions has its own benchmarks that are frequently used for developing, testing and comparing QA systems [4, 6, 17, 19, 23, 38, 45, 46].

However, using only a single information source limits the *answer coverage* of QA systems: the individual sources are not complete, and may fail to cover the knowledge required for answering a user question. Consider, as an example, the question below:

Who was fouled before the first penalty in the 2022 FIFA final?

This kind of detailed information on a sports event is rarely covered in a structured information source like a KB or table, but can be found in text discussing the content of the match. On the other hand, structured sources often include information that is not present in text. Tables often store match-specific details, and would contain, for instance, the answer to the following question:

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conference'17, July 2017, Washington, DC, USA

© 2023 Association for Computing Machinery.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM... \$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

Argentina's ball possession in the 2022 WC final?

For some questions, answers appear in multiple sources. Such *answer redundancy* can also be helpful for QA systems, and boost their *confidence* in predicted answers. For instance, consider:

In which stadium was the 2022 soccer world cup final played?

The answer to this question occurs in a Wikipedia infobox, text content, and Wikidata. It may even be necessary to join evidence from multiple sources for answering a more complex question:

Which team was behind by two goals but still won a FIFA final?

The list of FIFA World Cup finals and their winners could be looked up in a KB, but the goal deficit information associated with the match timeline would either be discussed in text, or could be reasoned over statistics in tables. These observations have triggered work on heterogeneous QA [27, 33, 36, 37, 42–44]: jointly harnessing multiple sources for answering factual questions [31].

Limitations of state-of-the-art. There are currently three strategies of evaluating heterogeneous QA: (i) using benchmarks for single-source QA but showing that using more sources improves performance [27, 33, 43, 44]; (ii) using benchmarks for single-source QA, but artificially removing parts of the “main” source before augmenting the benchmark with new sources [36, 37]; and (iii) using dedicated benchmarks for heterogeneous QA [11, 38]. The first approach usually leads to quick saturation on benchmarks: all answers are still available only in the primary source, which is what the methods primarily target, and auxiliary sources bring in incremental gains. The second approach is inherently flawed because considering heterogeneous sources obviously improves performance, as the main source is intentionally weakened. This creates an artificial situation and does not expose the true strengths and weaknesses of methods built for heterogeneous QA.

Our contribution belongs to the third approach. There are a few existing benchmarks for multi-source QA [25, 38, 47], but these either contain synthetic questions and do not reflect idiosyncrasies in formulation and intent concerning real users, or cover only a narrow spectrum of sources and domains [10–12, 24, 50].

A new benchmark. We make the case for a benchmark that *inherently requires* the usage of a mixture of information sources, as a more natural testbed for evaluating heterogeneous QA systems. To this end, we release COMP MIX (Complete questions over a Mixture of sources), a *crowdsourced* QA benchmark with questions that require heterogeneous sources for answering (Wikidata KB, and Wikipedia text, tables and infoboxes). The dataset has 9,410 questions created by *humans* from *five different domains*: books, movies, music, TV series and soccer. The answers are grounded to the Wikidata KB, which allows use of consistent evaluation metrics for QA systems returning either entity IDs or simple strings.

Table 1: Comparing benchmarks for heterogeneous QA.

Dataset	KB	Text	Table	Info	OR	HQ	OD
HYBRIDQA [11]	✗	✓	✓	✗	✗	✓	✓
MULTIMODALQA [39]	✗	✓	✓	✗	✓	✗	✓
OTT-QA [10]	✗	✓	✓	✗	✓	✓	✓
MANYMODALQA [18]	✗	✓	✓	✗	✗	✓	✓
WIKIMOVIES [25]	✓	✓	✗	✗	✓	✗	✗
TAT-QA [50]	✗	✓	✓	✗	✗	✓	✗
FINQA [12]	✗	✓	✓	✗	✗	✓	✗
HETPQA [34]	✗	✓	✓	✓	✗	✓	✗
COMP MIX (ours)	✓	✓	✓	✓	✓	✓	✓

OR: Open Retrieval; HQ: Human Questions; OD: Open Domain.

Table 2: Basic statistics for the COMP MIX benchmark.

Domains	Books, Movies, Music, TV series, Soccer
Questions	9,410 (train: 4,966, dev: 1,680, test: 2,764)
Avg. question length	9.19 words (min=2, median=9, max=28)
Avg. no. of question entities	1.11 (min=1, median=1, max=4)
Avg. answer length (text)	2.17 words (min=1, median=2, max=21)
Avg. no. of answers	1.02 (min=1, median=1, max=6)
Entities covered	5,413 (long-tail: 2,511, with <50 KB-facts)

Contributions. This paper presents our benchmark COMP MIX, accompanied by an in-depth analysis. We identify complex phenomena in the questions, like temporal conditions, multiple entities and relations, aggregations and comparisons. We investigate the effect of combining multiple sources on answer coverage and redundancy, and show that heterogeneous sources are truly required.

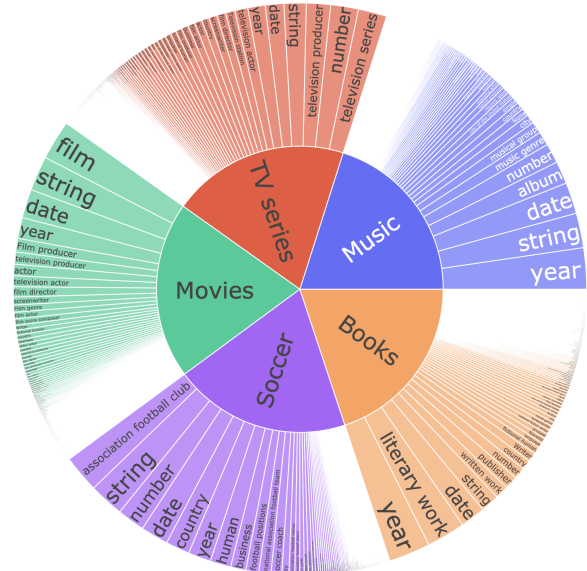
Finally, we evaluate multiple recent heterogeneous QA methods on COMP MIX, and identify questions for which none of these systems gives correct answers. Interestingly, the results for a recent GPT model show that even a large language model (LLM) can answer only half of the questions for this realistic and challenging benchmark. The COMP MIX benchmark is publicly available at <https://qa.mpi-inf.mpg.de/compmix>.

2 BENCHMARK DESCRIPTION

2.1 Prior benchmarks and COMP MIX rationale

There are many datasets for KB-QA (like WebQuestions [4], SimpleQuestions [6], and CSQA [32]), text-QA (like SQuAD [29], HotpotQA [45], and NaturalQuestions [23]), and table-QA (like WikiTableQuestions [28], NQ-Tables [19], and WikiSQL [49]). However, these benchmarks were created with the intention of having a specific underlying source for answering, which already contains almost all answers to the questions. This restricts their utility as a testbed for heterogeneous QA. Thus, existing work on heterogeneous QA, being forced to rely on these benchmarks, would often remove significant chunks of information from this “main” information source ($\approx 50\%$ of Freebase removed for evaluating on WebQuestions in [36]), and add parts of other sources to simulate a setting with heterogeneous sources.

All existing benchmarks for heterogeneous QA suffer from one or more of the following issues: (i) their questions are not fully human-generated, and hence lack the diverse formulations of real users [25, 38, 47]; (ii) they are restricted to small or artificial KBs, orders of magnitude smaller than large curated knowledge bases

**Figure 1: Answer-type frequencies per domain in COMP MIX.**

like Wikidata or DBpedia [25, 47]; (iii) they span only two sources, like tables and text [10, 12, 50], or text and knowledge bases [25, 38, 47]; (iv) they explore only one domain like finance [12, 50], geography [24], or e-commerce [34]; and (v) their questions are only in conversational form with implicit intent, unsuitable for evaluating stand-alone QA methods [14, 16, 26].

COMP MIX removes these shortcomings: (i) it is crowdsourced; (ii) it includes the full KB as one of the knowledge sources; (iii) it spans four sources; (iv) it covers five domains; and (v) it contains self-contained complete questions. A succinct comparison of salient properties across benchmarks is in Table 1.

2.2 COMP MIX

We create COMP MIX by collating the *completed* (intent-explicit) versions of the potentially incomplete (intent-implicit) questions in the CONV MIX [14] benchmark, which is a dataset for conversational QA over heterogeneous sources. These completed questions are provided directly by crowdworkers on Amazon Mechanical Turk (AMT), i.e. are created by *humans*. The answers to the questions were derived from *four* sources: either the full Wikidata KB, or the text, tables or infoboxes from all of Wikipedia. The questions span *five* domains: movies, tv series, music, books, and soccer (a distribution of expected answer types for each domain is in Fig. 1). Overall, the benchmark comprises 9,410 questions, split into train set (4,966), development set (1,680), and test set (2,764). Basic statistics for COMP MIX can be found in Table 2. A notable property of our dataset is the presence of a significant fraction of questions with *long-tail entities* (last row), a major vulnerability of LLM methods.

COMP MIX includes questions, their domains, and their corresponding answers. Answers are Wikidata entity identifiers (text labels are also provided), plaintext strings, or normalized dates. This enables consistent evaluation across extractive and generative answering models. In addition, entity markup in question formulations are provided by crowdworkers. Answer sources are given, too: “KB”, “text”, “table”, or “infobox”.

3 BENCHMARK ANALYSIS

3.1 Answer coverage

One key desideratum of the benchmark is that heterogeneous sources are actually required for answering the questions inside. To verify that this is the case, we analyzed the answer coverage of each information source, which is the number of questions that a source contains the answer for. In a good benchmark for heterogeneous QA, each source should have an answer coverage far less than 100%.

At the time of benchmark creation, Turkers were given a domain, and they picked up an entity of choice from the domain, followed by asking a natural question using this entity, and then provided an answer to the question. They also provided the source they consulted for locating their answer. For computing coverage, we first consider these *source annotations by the crowdworkers*. However, this measurement only captures whether a specific information source has the desired information, without any implications concerning the other sources.

Therefore, we also conducted an automatic analysis of the answer coverage using a recall-oriented retriever that, given a question, tries to obtain as many relevant pieces of evidence as possible from all our sources. This retriever is implemented as in [14, 15], and would first disambiguate KB-entities from the question (using CLOCQ [13], a recent system), and then retrieve KB-facts, text-sentences, table-records and infobox-entries with these disambiguated KB-entities. For each evidence, mentions of entities are linked to the KB. We measure this *automated answer coverage* as the number of questions for which the gold answer is among this set of mentioned entities in the pool of retrieved evidence. As with any large-scale automated analysis, this statistic is a noisy proxy, because the mere presence of an answer does not necessarily mean that the surrounding evidence is question-relevant.

The results of both analyses are in Table 3. First, we see that the AMT annotators used the KB, text and infoboxes almost equally often to answer their questions (tables also consulted $\geq 10\%$ of times). This proves that COMP MIX is *not biased* towards any specific underlying source. Second, from the automated measurement, we learn that adding an information source always improves the answer coverage. Note that this is a natural expansion, as opposed to augmentation after artificial suppression of large parts of specific sources. By including all sources, the answer coverage goes up to about 87%. Note that our recall-oriented retriever only provides a loose upper bound: the performance of an actual retriever that balances recall and precision would currently reach a lower number (cf. Sec. 4). Thus, our benchmark leaves substantial room for the development of smart *heterogeneous retrievers*. Overall, these measurements suggest that all four sources are naturally required for answering the questions in COMP MIX, and different sources complement each other nicely.

3.2 Answer redundancy

Answer redundancy creates scope to test a heterogeneous system’s ability to boost confidence in its prediction when multiple matches happen across sources. For each question, we thus measured the number of sources touched by the retrieved pieces of evidence that actually contain the gold answer. Results are in Table 4. What we can see from here is that for a substantial proportion of questions,

Table 3: Answer coverage across information sources.

Source(s)	Annotated	Automated
KB	0.308	0.807
Text	0.280	0.690
Tables	0.112	0.272
Infoboxes	0.299	0.545
KB+Text	0.588	0.853
KB+Tables	0.420	0.821
KB+Infoboxes	0.607	0.831
Text+Tables	0.393	0.702
Text+Infoboxes	0.580	0.734
Tables+Infoboxes	0.412	0.610
KB+Text+Tables	0.701	0.857
KB+Text+Infoboxes	0.888	0.861
KB+Tables+Infoboxes	0.720	0.841
Text+Tables+Infoboxes	0.692	0.743
All sources	1.000	0.865

Table 4: Answer redundancy across information sources.

Answer found in 1 source	0.157
Answer found in 2 sources	0.168
Answer found in 3 sources	0.341
Answer found in all sources	0.199

the answer is located in two ($\approx 17\%$) or three ($\approx 34\%$), out of four, sources. A reasonable chunk even has redundancy across all sources ($\approx 20\%$). This shows that COMP MIX has ample answer redundancy to be exploited by some appropriate heterogeneous QA model.

3.3 Anecdotal examples

For each of our five domains, Table 5 shows representative examples from the COMP MIX benchmark. The examples illustrate that our dataset has a wide range of questions in terms of both *syntactic structure* – from well-formulated fluent questions (1, 4, 5, 9) to ad hoc telegraphic queries (6, 7), as well as *semantic complexity* – from simple intents (6, 8) to more complex ones requiring conjunction (2), temporal understanding (3, 5), or aggregations (9).

4 EVALUATION WITH COMP MIX

Metrics. We use standard QA metrics for evaluating models on COMP MIX: (i) *Precision at 1* ($P@1$), which is either 1 or 0 according as the top-ranked system answer is correct or not; (ii) *Mean reciprocal rank* (MRR), which is the reciprocal of the first rank at which a correct answer is located; and, (iii) *Hit at 5* ($\text{Hit}@5$), which is either 1 or 0 according as the first five system responses contains a gold answer or not. A system answer is considered correct if it exactly (case-insensitive) matches a Wikidata ID (if QA system returns IDs) or the accompanying plaintext string/entity label (if QA system returns simple text). Metrics are averaged over all questions.

Models. To better understand the state-of-the-art in heterogeneous QA, we evaluate several recent QA models that incorporate heterogeneous sources on COMP MIX. We also include GPT in our model suite, to verify if LLMs trained on colossal web corpora are already sufficient for this task. We compare the following models:

Table 5: Representative questions from COMPmix. Sources that can be used for answering these questions are in brackets.

Books	Movies	Music	TV series	Soccer
1. <i>What did Rayford Steele from Left Behind do as a job?</i> Pilot [KB, Text]	2. <i>Which lead actress appeared in both Terms of Endearment and The Evening Star?</i> Shirley MacLaine [KB]	3. <i>Who replaced Ozzy Osbourne in Black Sabbath the first time?</i> Ronnie James Dio [Text, Info]	4. <i>What TV show featured the character called Carrie Mathison?</i> Homeland [KB, Text, Info]	5. <i>Where did the Uruguay national football team play their first recorded match?</i> Paso del Molino [Text]
6. <i>Author of the book To Kill a Mockingbird?</i> Harper Lee [KB, Text, Table, Info]	7. <i>Film in which Wallace Reid played the role of Walter Jarvis?</i> The Ghost Breaker [KB, Text]	8. <i>What is the singer Lemmy's birth name?</i> Ian Fraser Kilmister [KB, Text, Info]	9. <i>How many episodes of The 100 did Jason Rothenberg write?</i> 16 [KB, Text, Table]	10. <i>Who was runner up in the 1998 World Cup?</i> Brazil football team [KB, Text, Info]
11. <i>Name the fifth book in Malory Towers series.</i> In the Fifth at Malory Towers [KB, Table]	12. <i>Which movie is longer, Hamlet or Gone with the Wind?</i> Hamlet [KB, Info]	13. <i>What year was Inna's Hot album released in the US?</i> 2009 [Text]	14. <i>Which season of Teen Wolf did Tyler Posey become a co-producer?</i> 5 [Text, Info]	15. <i>Which soccer player scored the most number of goals in the UEFA Euro 2004 tournament?</i> Milan Baroš [KB, Text, Info, Table]
16. <i>What years were the two volumes of Little Women published?</i> 1868, 1869 [KB, Info]	17. <i>What is the run time of Titanic?</i> 195 minutes [KB, Infobox]	18. <i>What is the name of the second single in the album Arise?</i> Dead Embryonic Cells [Text, Table]	19. <i>What year was Matt Groening born?</i> 1954 [Text]	20. <i>Who was the kit manufacturer of Chelsea Football Club from 1981 to 1983?</i> Le Coq sportif [Text, Table]

- **UNI-K-QA** [27] follows a retriever-reader pipeline, and verbalizes evidence from each source into text. DPR [22] retrieves relevant evidences from the verbalized text, and a Fusion-in-decoder (FiD) model [20] generates the answer. Due to unavailability of end-to-end source code, we approximate UNI-K-QA by replacing DPR with BM25 [30]. FiD generates strings, that are mapped to a ranked list of KB items, by following [15].
- **CONVINSE** [14] is method for conversational QA over heterogeneous sources, but can also be applied to complete questions. It derives an intent-explicit structured representation for a question, and feeds this into a retriever-reader pipeline.
- **EXPLAIGNN** [15] is another method for heterogeneous QA that makes use of iterative graph neural networks for deriving the answer instead of a generative reader model like FiD.
- **GPT-3**. For evaluating GPT-3 [7] (model: *text-davinci-003*), we use the following prompt, which performed the best among different alternatives: *"Please answer the following question by providing the crisp answer entity, date, year, or numeric number. Q: <question>".* The generated answer string is then compared with the label and KB-aliases of the gold answer(s), to allow for potential synonymy (all strings lowercased). P@1 = 1 for exact matches, and zero otherwise. GPT-3 generates only a single answer, and thus metrics for ranked lists are inapplicable.

Results. Findings in Table 6 reveal two key takeaways: (i) systems from the literature only reach about 45% P@1 on COMPmix, showing substantial room for model improvement. Much higher

Table 6: Heterogeneous QA models on COMPmix (test set).

Method ↓ / Metric →	P@1	MRR	Hit@5
UNI-K-QA [27]	0.440	0.467	0.494
CONVINSE [14]	0.407	0.437	0.483
EXPLAIGNN [15]	0.442	0.518	0.617
GPT-3 [7] (text-davinci-003)	0.502	–	–

numbers have been reported for the compared models in previous sub-optimal evaluation settings (UNI-K-QA reaches 80% accuracy on WebQuestionsSP): this highlights challenges in COMPmix; (ii) The task is far from solved for LLMs, with the P@1 reached by GPT-3 being merely 50%. We attribute this to a large number of rare and emerging entities in our benchmark (see Table 2). To put aggregate performance in perspective, we found that for 2,764 questions (81.9%), at least one of the methods *failed* to produce a correct answer. On the other hand, for 759 (27.5%) *none* of the methods (including GPT-3) could find the correct answer. Table 7 shows one such unanswered question per domain. The second and fifth question make a perfect case for merging multiple sources, as subtle cues like *"adult Pi Patel"* or *"twin brothers"* are likely to be mentioned in textual sources, while movie cast or club membership is more easily looked up via structured repositories.

Table 7: Anecdotal questions for which none of the tested methods could derive the correct answer.

What was the original title of the book *Twilight*?
 Who played as adult Pi Patel in *Life of Pi* movie?
 What album is the song *Closing Time* on?
 Who composed the theme music for the TV series *Fury*?
 Who were the twin brothers who played soccer for Manchester United?

5 DATA SHARING AND ETHICS

Licensing. The COMP MIX benchmark is licensed under a Creative Commons Attribution 4.0 International License¹.

Availability. The benchmark is released on our project website², with inclusion of a leaderboard to keep track of the state-of-the-art. COMP MIX is also offered at Hugging Face for a broader audience³. The DOI of COMP MIX is <https://doi.org/10.57967/hf/0707>.

Ethical considerations. COMP MIX collates completed questions from the CONV MIX benchmark. For collecting CONV MIX, human annotators from AMT asked factoid questions in a conversational setting. No personal or other critical data was collected or published. The COMP MIX benchmark does not contain any personal or other critical data. All questions are provided anonymously. The annotators for collecting the CONV MIX dataset were paid a fair compensation for their work, consistent with the German minimum wage (irrespective of their residential country).

6 CONCLUSION

We release COMP MIX, a benchmark for heterogeneous QA that inherently requires the usage of multiple sources. Answering questions in COMP MIX requires systems to work consistently well for intents spread across five domains, and deal with a wide variety of challenging human formulations asking about rare entities. Thus, our hope is that this resource can help facilitate progress in developing more robust QA models that can appropriately exploit complementary and potentially redundant sources of information. A promising direction for improvement would be to include questions that need answers of a different flavor of heterogeneity: sentences, passages, or longer lists.

REFERENCES

- [1] Abdalghani Abujabal, Rishiraj Saha Roy, Mohamed Yahya, and Gerhard Weikum. 2018. Never-ending learning for open-domain question answering over knowledge bases. In *WWW*.
- [2] Sören Auer, Christian Bizer, Georgi Kobilarov, Jens Lehmann, Richard Cyganiak, and Zachary Ives. 2007. DBpedia: A nucleus for a Web of open data. In *Sem. Web*.
- [3] Hannah Bast and Elmar Haussmann. 2015. More accurate question answering on Freebase. In *CIKM*.
- [4] Jonathan Berant, Andrew Chou, Roy Frostig, and Percy Liang. 2013. Semantic parsing on Freebase from question-answer pairs. In *EMNLP*.
- [5] Nikita Bhutani, Xinyi Zheng, and H. V. Jagadish. 2019. Learning to Answer Complex Questions over Knowledge Bases with Query Composition. In *CIKM*.
- [6] Antoine Bordes, Nicolas Usunier, Sumit Chopra, and Jason Weston. 2015. Large-scale simple question answering with memory networks. *CoRR* (2015).
- [7] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. In *NeurIPS*.
- [8] Kaushik Chakrabarti, Zhimin Chen, Siamak Shakeri, and Guihong Cao. 2020. Open domain question answering using web tables. *arXiv* (2020).
- [9] Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. Reading Wikipedia to Answer Open-Domain Questions. In *ACL*.
- [10] Wenhui Chen, Ming-Wei Chang, Eva Schlinger, William Yang Wang, and William W Cohen. 2021. Open Question Answering over Tables and Text. In *ICLR*.
- [11] Wenhui Chen, Hanwen Zha, Zhiyu Chen, Wenhan Xiong, Hong Wang, and William Yang Wang. 2020. HybridQA: A Dataset of Multi-Hop Question Answering over Tabular and Textual Data. In *EMNLP*.
- [12] Zhiyu Chen, Wenhui Chen, Charese Smiley, Sameena Shah, Iana Borova, Dylan Langdon, Reema Moussa, Matt Beane, Ting-Hao Huang, Bryan Routledge, and William Yang Wang. 2021. FinQA: A Dataset of Numerical Reasoning over Financial Data. In *EMNLP*.
- [13] Philipp Christmann, Rishiraj Saha Roy, and Gerhard Weikum. 2022. Beyond NED: Fast and Effective Search Space Reduction for Complex Question Answering over Knowledge Bases. In *WSDM*.
- [14] Philipp Christmann, Rishiraj Saha Roy, and Gerhard Weikum. 2022. Conversational Question Answering on Heterogeneous Sources. In *SIGIR*.
- [15] Philipp Christmann, Rishiraj Saha Roy, and Gerhard Weikum. 2023. Explainable Conversational Question Answering over Heterogeneous Sources via Iterative Graph Neural Networks. In *SIGIR*.
- [16] Yang Deng, Wenqiang Lei, Wenxuan Zhang, Wai Lam, and Tat-Seng Chua. 2022. PACIFIC: Towards Proactive Conversational Question Answering over Tabular and Textual Data in Finance. In *EMNLP*.
- [17] Mohnish Dubey, Debayan Banerjee, Abdelrahman Abdelkawi, and Jens Lehmann. 2019. LC-QuAD 2.0: A large dataset for complex question answering over Wikidata and DBpedia. In *ISWC*.
- [18] Darryl Hannan, Akshay Jain, and Mohit Bansal. 2020. ManyModalQA: Modality Disambiguation and QA over Diverse Inputs. In *AAAI*.
- [19] Jonathan Herzig, Thomas Mueller, Syrine Krichene, and Julian Eisenschlos. 2021. Open Domain Question Answering over Tables via Dense Retrieval. In *NAACL*.
- [20] Gautier Izacard and Édouard Grave. 2021. Leveraging Passage Retrieval with Generative Models for Open Domain Question Answering. In *EACL*.
- [21] Sujay Kumar Jauhar, Peter Turney, and Eduard Hovy. 2016. Tables as semi-structured knowledge for question answering. In *ACL*.
- [22] Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense Passage Retrieval for Open-Domain Question Answering. In *EMNLP*.
- [23] Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, and Kenton Lee. 2019. Natural Questions: A benchmark for question answering research. *TACL* 7 (2019).
- [24] Xiao Li, Yawei Sun, and Gong Cheng. 2021. TSQA: Tabular scenario based question answering. In *AAAI*.
- [25] Alexander Miller, Adam Fisch, Jesse Dodge, Amir-Hossein Karimi, Antoine Bordes, and Jason Weston. 2016. Key-value memory networks for directly reading documents. *EMNLP* (2016).
- [26] Kai Nakamura, Sharon Levy, Yi-Lin Tuan, Wenhui Chen, and William Yang Wang. 2022. HybriDialogue: An Information-Seeking Dialogue Dataset Grounded on Tabular and Textual Data. In *ACL*.
- [27] Barlas Oguz, Xilun Chen, Vladimir Karpukhin, Stan Peshterliev, Dmytro Okhonko, Michael Schlichtkrull, Sonal Gupta, Yashar Mehdad, and Scott Yih. 2022. UniK-QA: Unified Representations of Structured and Unstructured Knowledge for Open-Domain Question Answering. In *NAACL-HLT*.
- [28] Panupong Pasupat and Percy Liang. 2015. Compositional Semantic Parsing on Semi-Structured Tables. In *ACL*.
- [29] Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. SQuAD: 100,000+ Questions for Machine Comprehension of Text. In *EMNLP*.
- [30] Stephen Robertson and Hugo Zaragoza. 2009. The Probabilistic Relevance Framework: BM25 and Beyond. *Foundations and Trends in Information Retrieval* (2009).
- [31] Rishiraj Saha Roy and Avishek Anand. 2022. *Question Answering for the Curated Web: Tasks and Methods in QA over Knowledge Bases and Text Collections*. Springer.
- [32] Amrita Saha, Vardaan Pahuja, Mitesh Khapra, Karthik Sankaranarayanan, and Sarath Chandar. 2018. Complex sequential question answering: Towards learning to converse over linked question answer pairs with a knowledge graph. In *AAAI*.
- [33] Denis Savenkov and Eugene Agichtein. 2016. When a knowledge base is not enough: Question answering over knowledge bases with external text data. In *SIGIR*.
- [34] Xiaoyu Shen, Gianni Barlacchi, Marco Del Tredici, Weiwei Cheng, Bill Byrne, and Adrià de Gispert. 2022. Product Answer Generation from Heterogeneous Sources: A New Benchmark and Best Practices. In *ECNLP@ACL*.
- [35] Fabian Suchanek, Gjergji Kasneci, and Gerhard Weikum. 2007. YAGO: A core of semantic knowledge. In *WWW*.
- [36] Haitian Sun, Tania Bedrax-Weiss, and William Cohen. 2019. PullNet: Open Domain Question Answering with Iterative Retrieval on Knowledge Bases and Text. In *EMNLP-IJCNLP*.
- [37] Haitian Sun, Bhuwan Dhingra, Manzil Zaheer, Kathryn Mazaitis, Ruslan Salakhutdinov, and William Cohen. 2018. Open Domain Question Answering Using Early Fusion of Knowledge Bases and Text. In *EMNLP*.

¹<http://creativecommons.org/licenses/by/4.0/>

²<https://qa.mpi-inf.mpg.de/compmix/>

³<https://huggingface.co/datasets/pchristm/CompMix>

- [38] Alon Talmor and Jonathan Berant. 2018. The Web as a Knowledge-Base for Answering Complex Questions. In *NAACL-HLT*.
- [39] Alon Talmor, Ori Yoran, Amnon Catav, Dan Lahav, Yizhong Wang, Akari Asai, Gabriel Ilharco, Hannaneh Hajishirzi, and Jonathan Berant. 2021. MultiModalQA: Complex Question Answering over Text, Tables and Images. In *ICLR*.
- [40] Svitlana Vakulenko, Javier David Fernandez Garcia, Axel Polleres, Maarten de Rijke, and Michael Cochez. 2019. Message Passing for Complex Question Answering over Knowledge Graphs. In *CIKM*.
- [41] Denny Vrandečić and Markus Krötzsch. 2014. Wikidata: A free collaborative knowledge base. *CACM* (2014).
- [42] Wenhan Xiong, Mo Yu, Shiyu Chang, Xiaoxiao Guo, and William Yang Wang. 2019. Improving Question Answering over Incomplete KBs with Knowledge-Aware Reader. In *ACL*.
- [43] Kun Xu, Yansong Feng, Songfang Huang, and Dongyan Zhao. 2016. Hybrid question answering over knowledge base and free text. In *COLING*.
- [44] Kun Xu, Siva Reddy, Yansong Feng, Songfang Huang, and Dongyan Zhao. 2016. Question Answering on Freebase via Relation Extraction and Textual Evidence. In *ACL*.
- [45] Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D Manning. 2018. HotpotQA: A Dataset for Diverse, Explainable Multi-hop Question Answering. In *EMNLP*.
- [46] Wen-tau Yih, Matthew Richardson, Christopher Meek, Ming-Wei Chang, and Jina Suh. 2016. The value of semantic parse labeling for knowledge base question answering. In *ACL*.
- [47] Yuyu Zhang, Hanjun Dai, Zornitsa Kozareva, Alexander J. Smola, and Le Song. 2018. Variational Reasoning for Question Answering with Knowledge Graph. In *AAAI*.
- [48] Yuyu Zhang, Ping Nie, Arun Ramamurthy, and Le Song. 2021. Answering any-hop open-domain questions with iterative document reranking. In *SIGIR*.
- [49] Victor Zhong, Caiming Xiong, and Richard Socher. 2017. Seq2sql: Generating structured queries from natural language using reinforcement learning. *arXiv* (2017).
- [50] Fengbin Zhu, Wenqiang Lei, Youcheng Huang, Chao Wang, Shuo Zhang, Jiancheng Lv, Fuli Feng, and Tat-Seng Chua. 2021. TAT-QA: A Question Answering Benchmark on a Hybrid of Tabular and Textual Content in Finance. In *ACL*.