

Deterministic Graph Cuts in Subquadratic Time: Sparse, Balanced, and k -Vertex

Yu Gao¹, Jason Li², Danupon Nanongkai³, Richard Peng¹, Thatchaphol Saranurak⁴, and
Sorrachai Yingchareonthawornchai⁵

¹Georgia Institute of Technology and Microsoft Research Redmond, USA

²Carnegie Mellon University, USA

³KTH Royal Institute of Technology, Sweden

⁴Toyota Technological Institute at Chicago, USA

⁵Aalto University, Finland

Abstract

We study deterministic algorithms for computing graph cuts, with focus on two fundamental problems: balanced sparse cut and k -vertex connectivity for small k ($k = O(\text{polylog } n)$). Both problems can be solved in near-linear time with randomized algorithms, but their previous deterministic counterparts take at least quadratic time. In this paper, we break this bound for both problems. Interestingly, achieving this for one problem crucially relies on doing so for the other.

In particular, via a divide-and-conquer argument, a variant of the cut-matching game by [Khandekar et al.'07], and the local vertex connectivity algorithm of [Nanongkai et al. STOC'19], we give a subquadratic time algorithm for k -vertex connectivity using a subquadratic time algorithm for computing balanced sparse cuts on sparse graphs. To achieve the latter, we improve the previously best mn bound for approximating balanced sparse cut for the whole range of m . This starts from (1) breaking the n^3 barrier on dense graphs to $n^{\omega+o(1)}$ (where $\omega < 2.372$) using the the PageRank matrix, but without explicitly sweeping to find sparse cuts; to (2) getting the $\tilde{O}(m^{1.58})$ bound by combining the J -trees by [Madry FOCS '10] with the $n^{\omega+o(1)}$ bound above, and finally; to (3) getting the $m^{1.5+o(1)}$ bound by recursively invoking the second bound in conjunction with expander-based graph sparsification. Interestingly, our final $m^{1.5+o(1)}$ bound lands at a natural stopping point in the sense that polynomially breaking it would lead to a breakthrough for the dynamic connectivity problem.

Contents

1	Introduction	1
1.1	Our Contributions	2
2	Overview	4
2.1	k -Vertex-Connectivity	5
2.2	From Vertex Expansion to Edge Conductance	6
2.3	Approximating Low-Conductance Balanced Cuts	7
2.4	Putting Everything Together	9
3	Related Works	10
3.1	k -Vertex Connectivity	10
3.2	Graph Partitioning	10
4	Structural Properties of Vertex-Cuts	11
4.1	Interactions Between Two Separating Triples	12
4.2	Proof of Theorem 2.2: Part 1 (Sufficiency)	12
4.3	Proof of Theorem 2.2: Part 2 (Necessity)	14
4.4	Vertex-Expansion and k -Connectivity	16
5	Deterministic Vertex Connectivity Algorithm	17
5.1	Overview	17
5.2	Algorithm	19
5.3	Correctness	20
5.4	Running Time	22
5.5	Proof of Theorem 2.4	28
6	Low-Vertex-Expansion Cuts from Balanced Low-conductance Cuts	30
6.1	Lower Bounding Vertex Expansion via Expander Embedding	31
6.2	Finding Low Vertex Expansion Cut via Single Commodity Flow	31
6.3	Cut with expander complement	32
6.4	Cut-matching game via approximate low-conductance cut	33
7	Near-Expander Low-Conductance Cuts on Dense Graphs	34
7.1	Near-Expander Cuts	36
7.2	Preliminaries about PageRank	37
7.3	Sweep Cut without Cut-size Query	38
7.4	Computing Low Conductance Cuts from Large Excess	42
7.5	Guarantee of Large Excess from Existence of Low Conductance Cuts	43
7.6	Merging Low Conductance Cuts into a Near-Expander Cut	44
8	Most-Balanced Low-Conductance Cuts on Sparse Graphs	46
8.1	Most-Balanced Sparse Cut on a j -tree	48
8.2	Most Balanced Cut on G	53
9	Recursive Sparsification	54

A	Notations	57
B	Split Vertex Connectivity	58
B.1	Algorithm	58
B.2	Analysis	58
C	Expander Split	59
C.1	Proof of Proposition C.2	60

1 Introduction

Graph cuts, or sets of vertices or edges whose removal disconnects graphs, are fundamental objects in graph theory and graph algorithms. Efficiently computing graph cuts have a wide range of applications that include planarity testing [HT73], image processing [BVZ99], and high performance/parallel computing [BMS⁺16]. While a very large gap remains between theoretical and practical performances, graph partitioning algorithms have also proven to be a powerful theoretical tool, with prominent applications including linear systems solving [ST11], approximation algorithms for unique games [Tre08, ABS15], and dynamic graph data structures [NS17, Wul17, NSW17].

Due to the central role of cuts in graph algorithms, they are a natural focus in the study of more efficient graph algorithms. Many improvements in the running times of cut-related graph algorithms [KKT95, Kar00, ST14, She13, KLOS14, Mad10] stem from better understandings of randomized algorithmic primitives: there is a polynomial factor separation between the best randomized and the best deterministic algorithms for many problems on graphs.

On the other hand, deterministic algorithms have a multitude of advantages over randomized ones. Theoretically, this is perhaps most evident in data structures, where an adaptive adversary can choose the next operation based on the previous output of the data structure. This resulting dependency is not handled by the analysis of many randomized data structures [KL13, FMP⁺18], and is only fixable in isolated situations using more intricate tools for analyzing probabilistic processes [CMP16, KS16, KPPS17]. The highly efficient performance of the randomized algorithms also make it difficult to apply more general purpose derandomization tools (e.g. [NW94, Uma03, CIS18]), as many such tools could potentially incur overheads of polynomial factors. Historically, the derandomization efforts also led to powerful tools that are useful beyond the derandomization itself. For the case of cuts, a recent example is Thorup and Kawarabayashi’s edge connectivity algorithm [KT19] (see also [HRW17, LST18]), which is a deterministic counterpart of Karger’s prominent randomized near-linear time algorithm [Kar00]. Techniques from [KT19] have later found applications in, e.g., distributed algorithms [DHNS19], dynamic algorithms [GHT18], and querying algorithms [RSW18] (some of these algorithms are randomized).

Near-linear Randomized vs Quadratic Deterministic. While deterministic algorithms for edge connectivity are well understood, there remain big gaps between deterministic and randomized algorithms for many other graph cut problems. Among such problems, two well-known ones are *k-vertex connectivity*, and *approximate sparsest cut* along with its generalization to *balanced sparse cut*. On sparse graphs, these problems can be solved in *near-linear* time with randomized algorithms, but their previous deterministic counterparts take at least *quadratic time*:

(I) The first problem asks whether k vertices can be removed to disconnect the graph for a given parameter k . Note that on sparse graphs (when $m = \tilde{O}(n)$), it can be assumed that $k = O(\text{polylog}(n))$ [NI92].¹ There has been a long line of work on this problem (e.g. [Kle69, Pod73, ET75, Eve75, Gal80, EH84, Mat87, BDD⁺82, LLW88, CT91, NI92, CR94, Hen97, HRG00, Gab06, NSY19a]). The problem was recently shown to admit a randomized algorithm that takes $\tilde{O}(m + nk^3)$ time [NSY19a, NSY19b, FY19], thus *near-linear* time on sparse graphs. In contrast,

¹We use n and m to denote the number of nodes and edges respectively, and use \tilde{O} to suppress $\text{polylog}(n)$.

the best deterministic algorithm, due to Gabow [Gab06], takes $O(m \cdot (n + \min(k^{5/2}, kn^{3/4})))$ time, which is $\tilde{O}(n^2)$ on sparse graphs. Note, though, that for such k the $\tilde{O}(n^2)$ bound dates five decades back to the result of Kleitman [Kle69]. Gabow’s and the preceding deterministic algorithms (e.g. [HRG00, Eve75, FM95]) improved over Kleitman’s bound only when the input graph is dense enough. In fact, no improvement over Kleitman was known even for $k = 4$ (the case of $k < 4$ was long known to admit near-linear time [Tar72, HT73]). See, e.g., [Sch03, Chapter 15] and [Gab06] for further surveys.

(II) The second problem asks for a cut that approximately minimizes the *conductance*, which is the ratio between the number of cut edges and the volume (the sum of degrees) of the smaller side of the cut (we will make this, as well as other high level definitions, more precise in Section 2). A harder version of this problem, the balanced sparse cut problem (Definition 2.5), additionally requires that the two sides of the cut are (approximately) as equal as possible in terms of volumes. Our focus is on algorithms for these problems with small approximation factors in both the cut size and the balance. With randomization, both versions admit such algorithms with near-linear time complexity (e.g. by flow-based algorithms [KRV09, KLOS14, She13, Pen16] or spectral-based algorithms [ST04, ACL06, OV11, OSV12]), and such routines are widely used primitives in efficient graph algorithms.

However, the previous best deterministic algorithms require $\Omega(mn)$ time (e.g. by computing PageRank vectors [ACL06]). On dense graphs this bound can be improved to $O(n^\omega)$ for sparsest cut [Alo86, PC99], where $\omega < 2.372$ is the matrix multiplication exponent, but not for the balanced version that underlies most uses of sparse cuts in efficient algorithms.²

Furthermore, approximating balanced sparse cuts on sparse graphs is already understood to be an extremely important graph theoretic primitive [NS17, Wu17, NSW17]. For any constant $\theta > 0$, achieving an $O(n^{1.5-\theta})$ -time deterministic algorithm for the balanced sparse cut problem on sparse graphs would imply a major breakthrough in dynamic graph algorithms, namely a polynomial improvement over the classic deterministic algorithm for the dynamic graph connectivity problem [Fre85, EGIN97]. On sparse graphs, no time bound better than n^2 was known for balanced sparse cut or even the easier sparsest cut problem.

1.1 Our Contributions

In this paper, we present the first sub-quadratic time algorithms on sparse graphs for all the above problems. Our result for the k -vertex connectivity problem is as follows.

Theorem 1.1. *There is an algorithm that takes an undirected unweighted graph with n vertices and m edges, along with a threshold k , where $k < n^{1/8}$, and outputs a subset S of size less than k whose removal from G disconnects it into at least two components, or that no such subsets exist, in time $\hat{O}(m + \min\{n^{1.75}k^{1+k/2}, n^{1.9}k^{2.5}\})$.³*

Our key tool for obtaining this running time is an $\hat{O}(m^{1.5})$ -time algorithm for the balanced sparse cut problem. This is the first subquadratic-time algorithm for both balanced sparse cut

²While there is a reduction from sparsest cut to balanced sparsest cut in the approximation algorithms literature, it may need to iterate up to $\Theta(n)$ times, giving a worse overall total than the $O(nm)$ bound.

³We use the $\hat{O}(\cdot)$ notation to hide sup-polynomial lower order terms. Formally $\hat{O}(f(n)) = O(f(n)^{1+o(1)})$, or that for any constant $\theta > 0$, we have $\hat{O}(f(n)) \leq O(f(n)^{1+\theta})$. It can be viewed as a direct generalization of the $\tilde{O}(\cdot)$ notation for hiding logarithmic factors, and behaves in the same manner.

Method	$f(\phi)$	β	Rand. Runtime	Det. Runtime
Spectral / Cheeger Cut [Alo86]	$O(\phi^{1/2})$	n	$O(m\phi^{-1/2} \log n)$	$O(n^\omega)$
LP/SDP rounding [LR99, ARV09, AK16]	$O(\phi\sqrt{\log n})$	$O(1)$	$O(n^2)$	$\text{poly}(n, m)$
Local PageRank [ACL06, ACL08, AL08, AP09]	$O(\phi^{1/2} \log n)$	$O(1)$	$\widehat{O}(m\phi^{-1})$	$O(nm)$
Single Commodity Flows [KRV09, KKO07, She09, Pen16]	$O(\phi\sqrt{\log n})$	$O(1)$	$\widehat{O}(m)$	—
(A) This paper [Theorem 2.7]	$O(\phi^{1/2} \log n)$	$O(1)$	—	$O(n^\omega)$
(B) This paper [Corollary 2.9]	$O(\phi^{1/2} \log^{2.5} n)$	$O(1)$	—	$\widehat{O}(m^{\frac{2\omega-1}{\omega}})$
(C) This paper [Corollary 2.11]	$\phi^{1/2} n^{o(1)}$	$O(1)$	—	$\widehat{O}(m^{1.5})$

Table 1: Previous Results for Approximating Balanced Cuts. Recall from Definition 2.5 that $f(\phi)$ is the loss in conductance, and β is the loss in balance.

and sparsest cut. All our results are summarized in Table 1. We only explain these results roughly here, and defer detailed discussions to Section 2. Roughly, an algorithm for the sparsest cut problem is given a parameter $\phi < 1$, and must either output that the input graph has conductance at least ϕ , or output a sparse cut, with conductance $f(\phi) \geq \phi$, where we want $f(\phi)$ to be as close to ϕ as possible. (Ideally, we want $f(\phi) = \phi$, but $f(\phi) = O(\phi^{\Omega(1)} n^{o(1)})$ is typically acceptable.) For the balanced sparsest cut, we have parameter β indicating the balancedness of the output. Those algorithms with $\beta = O(1)$ (i.e. all, but the first) can be used to solve the balanced sparse cut problem. In Table 1, the most important parameter to compare our and previous algorithms are the time bounds in the last column. (All algorithms guarantee acceptable values of $f(\phi)$, and keep in mind that the first algorithm does not work for the balanced sparse cut problem.) We present three algorithms for balanced sparse cut:

- The first algorithm (A) guarantees the same $f(\phi)$ as the previous $O(nm)$ time algorithm, but takes $O(n^\omega)$. It thus improves the previous $O(mn)$ time bound for dense graphs and match the $O(n^\omega)$ time bound previously hold only for the sparsest cut problem.
- The second algorithm (B) guarantees slightly worse $f(\phi)$ than our first algorithm, but with lower time complexity ($\widehat{O}(m^{\frac{2\omega-1}{\omega}}) = O(m^{1.578})$). Its time complexity is subquadratic for sparse graphs.
- The third algorithm (C) guarantees an even worse $f(\phi)$, but with a even better time bound ($\widehat{O}(m^{1.5})$). What is most interesting about this bound is that it lands at a natural stopping point in the sense that polynomially improving it (even with a slightly worse $f(\phi)$) would lead to a breakthrough for the dynamic connectivity problem as discussed above.

While there remains significant gaps in the performances of our methods and their randomized counter parts (which we will discuss in Section 3), we believe our investigation represents a natural stopping point for a first step on more efficient deterministic graph cut algorithms. As mentioned earlier, improving our $\widehat{O}(m^{1.5})$ bound further would lead to a major breakthrough in dynamic graph algorithms.

Subsequently, a result involving a subset of the authors of this paper [CGL⁺19] gave a deterministic algorithm for computing balanced cuts with $n^{o(1)}$ approximation in time $\widehat{O}(m)$. While this result supersedes our third balanced-cut algorithm (C) for all values of ϕ , its high approximation error of $n^{o(1)}$ means our first two algorithms (A) and (B) still give better approximations when $\phi > n^{-o(1)}$. Furthermore, the $\widehat{O}(m^{1.5})$ runtime overhead in approximating minimum vertex expansion (Theorem 2.6) means the result in [CGL⁺19] does not immediately imply faster approximate vertex expansion routines. It can also be checked that the newer deterministic approximate vertex expansion bounds in [CGL⁺19]⁴ also don't improve the overall running times as stated in Theorem 1.1. It remains open to obtain almost-linear time algorithms for deterministically approximating vertex expansion (which would imply k -vertex connectivity in $\widehat{O}(m + n^{1.5})$ time for constant values of k), or almost-linear time algorithms for deterministically computing k -vertex connectivity.

Techniques. An interesting aspect of our techniques is the inter-dependencies between the results.

First, to obtain Theorem 1.1, we need a subquadratic-time algorithm for the balanced sparse cut problem, in particular the $\widehat{O}(m^{1.5})$ -time algorithm. This is because, based on the deterministic local algorithms of [NSY19a, CHI⁺17], we can construct a deterministic graph partitioning scheme which runs in subquadratic time as long as we have access to a deterministic procedure for approximating the “vertex expansion” of a graph. Then, we construct such procedure by relating the vertex expansion problem to the balanced sparse cut problem via a variant of the cut-matching game [KKOV07].

Secondly, to compute balanced sparse cuts in subquadratic time on sparse graphs, we invoke a deterministic version of the J -trees by Madry [Mad10] to reduce to solving the same problem on dense graphs. Here existing algorithms for dense graph are not efficient enough for the a subquadratic time balanced sparse cut algorithm, so we develop a new $O(n^\omega)$ -time algorithm for dense graphs. For this, we show how to find balanced sparse cuts from several PageRank vectors *without sweeping*; instead we can look at the volumes of some cuts and do binary search. Combining this $O(n^\omega)$ -time algorithm together with J -trees leads to a time bound of $\widehat{O}(m^{\frac{2\omega-1}{\omega}})$. By recursive invocations of such balanced sparse-cut routines in conjunction with expander-based graph sparsifications, we finally obtained the final time bound of $\widehat{O}(m^{1.5})$.

2 Overview

In this section, we briefly outline our techniques. As from hereon the results will be stated in their fullest formality, we will introduce notations as we proceed. A summary of these notations is in Appendix A.

Our graphs will be represented using $G = (V, E)$, and we will use $n = |V|$ and $m = |E|$ to denote the number of edges and vertices respectively. We assume all graphs are connected because otherwise, we either have a trivial cut, or can run our algorithms on each of the connected components separately.

⁴Sections 7.6 and 7.7 of <https://arxiv.org/pdf/1910.08025v1.pdf>

2.1 k -Vertex-Connectivity

We say that $G = (V, E)$ is k -vertex-connected (or simply k -connected) if there is no set $S \subset V$ of size $|S| < k$ where $G[V - S]$ has more than one connected component. We need the following notion:

Definition 2.1. A separation triple (L, S, R) is a partition of vertices such that $L, R \neq \emptyset$ and there is no edge between L and R . The size of (L, S, R) is $|S|$.

Checking whether a graph is k -vertex-connected is then equivalent to finding a separation triple of size less than k . We say that a pair of vertices x, y is k -connected if there is no separation triple of size less than k where $x \in L$ and $y \in R$.

Our deterministic algorithm for checking if G is k -connected is based on a divide-and-conquer approach. This is done by first exhibiting a sequence of structural results in Section 4, and then providing a divide-and-conquer algorithm in Section 5. The key structural theorem from Section 4 is the following:

Theorem 2.2. For any separation triple (L, S, R) , consider forming the graph H_L by

1. removing all vertices of R ,
2. replacing R with a clique K_{right} of size k , and
3. adding a biclique between S and K_{right} ,

as well as H_R symmetrically. Then G is k -connected if and only if

1. $|S| \geq k$.
2. Both the graphs H_L and H_R are k -connected.
3. Each pair $x, y \in S$, x and y are k -connected.

Note that checking if x, y are k -connected can be done using augmenting-path based max-flow algorithms in $O(mk)$ time [ET75]. Therefore, the time for checking the third condition is small when k and $|S|$ are small. This theorem naturally motivates a divide-and-conquer algorithm where we recurse on both H_L and H_R . In order to reduce the number of recursion levels, it is useful to find a small S that splits the vertices as even as possible. This motivates the following notion:

Definition 2.3. The *vertex expansion* of a separation triple (L, S, R) is

$$h(L, S, R) = \frac{|S|}{\min\{|L|, |R|\} + |S|},$$

and the vertex expansion of G is $h(G) = \min_{(L, S, R)} h(L, S, R)$. A c -approximation to the minimum vertex expansion is a separation triple whose vertex expansion is at most $c \cdot h(G)$.

At high level, our recursive algorithm works roughly as follows. We assume we can compute quickly an $n^{o(1)}$ -approximation $(\hat{L}, \hat{S}, \hat{R})$ to the minimum vertex expansion. If G has low vertex expansion, then we apply the structural theorem on such $(\hat{L}, \hat{S}, \hat{R})$ and recurse on both $H_{\hat{L}}$ and $H_{\hat{R}}$. Otherwise, G has high vertex expansion. In this case, observe that any separation triple (L, S, R) of size less than k must be very unbalanced, i.e., either $|L|$ or $|R|$ is very small. Now, this is exactly the situation where we can use local vertex connectivity routine from [NSY19a, CHI⁺17] for quickly detecting such separation triple (L, S, R) . By careful implementation of this idea together with some standard techniques, the performance of our algorithm can be formalized as:

Theorem 2.4. *Given a routine that computes $n^{o(1)}$ -approximations to the minimum vertex expansion of an undirected unweighted graph G with m edges in time m^θ for some $\theta > 1$, we can compute a k -vertex cut, or determine if none exists, when $k < n^{1/8}$, in time*

$$\widehat{O}\left(m + \min\left\{n^{1+\frac{1}{2}\theta}k^{1+\frac{k}{2}}, n^{1+\frac{3}{5}\theta}k^{\frac{8}{5}+\frac{3}{5}\theta}\right\}\right).$$

Proving this is the main goal of Section 5. For our eventual value of $\theta = 1.5 + o(1)$ in Section 2.4, this gives a running time of $\widehat{O}(m + \min\{n^{1.75}k^{1+k/2}, n^{1.9}k^{2.5}\})$ respectively.

2.2 From Vertex Expansion to Edge Conductance

To approximate vertex expansion of a graph, we relate it to its much more well-studied edge analog, namely *conductance*. For any graph $G = (V, E)$, the conductance of a cut $S \subset V$ is $\Phi(S) = \frac{|E_G(S, V \setminus S)|}{\min\{\text{vol}(S), \text{vol}(V \setminus S)\}}$ where $\text{vol}(S) = \sum_{u \in S} \deg u$. The conductance $\Phi(G)$ of a graph G is the minimum conductance of a subset of vertices, i.e., $\Phi(G) = \min_{\emptyset \neq S \subset V} \Phi(S)$. Recall that $\Phi(G)$ is NP-hard to compute [LR99]. Most efficient algorithms make the following bi-criteria approximation:

Definition 2.5. A subset $S \subseteq V$ of a graph $G = (V, E)$ is a $(\widehat{\phi}, c)$ -most-balanced ϕ -conductance cut for some parameters ϕ , $\widehat{\phi}$, and c if

1. $\text{vol}(S) \leq m$ and $\Phi(S) \leq \phi$, and
2. any set $\widehat{S} \subseteq V$ satisfying $\text{vol}(\widehat{S}) \leq m$ and $\Phi(\widehat{S}) \leq \widehat{\phi}$ satisfies $\text{vol}(\widehat{S}) \leq c \cdot \text{vol}(S)$.

Furthermore, for a function f where $f(\phi) \geq \phi$ and a value $c \geq 1$, we say that an algorithm \mathcal{A} is an $(f(\phi), c)$ -approximate balanced-cut algorithm if for any graph G and any parameter $\phi > 0$ given as input, it either:

1. certifies that $\Phi(G) \geq \phi$, or
2. outputs a (ϕ, c) -most-balanced $f(\phi)$ -conductance cut.

Our algorithmic definitions allow for general functions that transform conductances because the Cheeger-based algorithms [Alo86, OSV12] take ϕ to $1/2$ powers. A more detailed description of previous graph partitioning algorithms in terms of this formulation is in Section 3. This notion of approximation helps us connect all algorithmic components throughout the paper. First, in Section 6, we show a reduction that, given a $(f(\phi), c)$ -approximate balanced-cut routing, we can obtain an $n^{o(1)}$ -approximation to the minimum vertex expansion as we need from the previous section:

Theorem 2.6. *Given any $(f(\phi), c)$ -approximate balanced-cut routine APPROXBALCUT such that $f(\phi) \leq \phi^\xi n^{o(1)}$ for some absolute constant $0 < \xi \leq 1$, we can compute an $n^{o(1)}$ -approximation to the minimum vertex expansion on a graph with n vertices and m edges by invoking APPROXBALCUT a total of $O(c \log n)$ times, each time on a graph with n vertices and maximum degree $O(c \log n)$, plus a further deterministic overhead of $\widehat{O}(cm^{1.5})$.*

The key to Theorem 2.6 is the cut-matching game framework by Khandekar et al. [KKOV07, KRV09]. We observe that the cut-matching game variant by Khandekar, Khot, Orecchia, and Vishnoi [KKOV07] can be seen as a general reduction that allow us to can reduce the problems of approximating various notions of graph expansion (e.g. sparsity, vertex expansion, conductance) to the problem of many computing low conductance cuts in a $O(c \log n)$ -regular graph.

This enables us to concentrate on approximating low conductance balanced cuts, which is our second main contribution.

2.3 Approximating Low-Conductance Balanced Cuts

We develop three $(f(\phi), c)$ -approximate balanced-cut routines. The first algorithm, based on computing the PageRank matrix, breaks the n^3 barrier on dense graphs and have running time $O(n^\omega)$. We then combine it with the j -tree technique of Madry [Mad10] previously developed for randomized algorithms and obtain an algorithm with running time $\widehat{O}(m^{\frac{2\omega-1}{\omega}})$ but has slightly worse approximation. This breaks n^2 barrier for sparse graphs. Finally, we speed up the running time further to $\widehat{O}(m^{1.5})$ by recursively invoking the second bound in conjunction with expander-based graph sparsification.

We start with the formal statement of our first algorithm which is proved in Section 7:

Theorem 2.7. *There is an $(O(\phi^{1/2} \log m), 10)$ -approximate balanced-cut algorithm that runs in deterministic $O(n^\omega)$ time on any multigraph $G = (V, E)$ with n vertices, and any parameter ϕ .*

This algorithm is a derandomization of the *PageRank-Nibble* algorithm by Andersen, Chung, and Lang [ACL06]. Roughly speaking, this algorithm computes the *PageRank vector* $p_v \in \mathbb{R}_{\geq 0}^V$ of vertex v encoding a distribution of random walk starting at v . We first observe that computing the PageRank vector p_v for all $v \in V$ *simultaneously* can be easily done in $O(n^\omega)$ by computing an inverse of some matrix. How to exploits these vector are more subtle and challenging.

A *sweep cut* w.r.t. p_v is a cut of the form $V_{\geq t}^{p_v}$ where $V_{\geq t}^{p_v} = \{u \in V \mid p_v(u) \geq t\}$. Checking if there is a sweep cut $V_{\geq t}^{p_v}$ with conductance at most ϕ in can be easily done in $O(m)$. To do this, we compute $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$ and $\text{vol}(V_{\geq t}^{p_v})$ of *all* t in $O(m)$, by sorting vertices according their values in p_v and “sweeping” through vertices in the sorted order. Unfortunately, spending $O(m)$ time for each vertex v would give $O(mn)$ time algorithm which is again too slow.⁵

To overcome this obstacle, we show a novel way to obtain a sweep cut *without* approximating the cut size $|E(V_{\geq t'}^{p_v}, V - V_{\geq t'}^{p_v})|$ for any t' . We exploit the fact the sweep cut is w.r.t. a PageRank vector p_v and not some arbitrary vector. This allows us to do a binary search tree for t where the condition depends solely on the volume $\text{vol}(V_{\geq t}^{p_v})$ and not the cut size $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$. This is the key to the efficiency of our algorithm.

Next, we in turn use this scheme to speed up the computation of balanced low-conductance cuts via the j -tree constructions by Madry [Mad10]. In Section 8, we show:

Theorem 2.8. *Given an $(f(\phi), c)$ -approximate balanced-cut routine with running time $T_{BalCut}(n, m)$, along with any integer parameter $k > 0$, there is also an $(f(O(\phi \log^3 n)), 10c)$ -approximate balanced-cut routine with running time:*

$$\widehat{O}(k(m + T_{BalCut}(m/k, m))).$$

⁵To the best of our knowledge, there is no deterministic data structure even for checking whether $|E(S, V - S)| > 0$ in $o(m)$ time, given a vertex set $S \subset V$. That is, it is not clear how to approximate $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$ in $o(m)$ time even for a fix t .

Our strategy for Theorem 2.8 is as follows. First, we transform the graph to have constant degree via a standard reduction. At this point, we switch to the *sparsest cut* problem, since it is easier to work with in the steps to follow. Recall that the sparsity $\sigma(G)$ of a graph G is $\sigma(G) = \min_S \frac{|E(S, V-S)|}{\min\{|S|, |V-S|\}}$, which is similar to conductance but gives equal “weight” to each vertex. Then, we apply Madry’s j -tree construction on the (bounded degree) graph for a choice of j depending on k , obtaining k many j -trees such that there exists a j -tree with a near-optimal sparsest cut. Moreover, we show that we can assume that this near-optimal sparsest cut has a specific structure: either it cuts only the tree edges of the corresponding j -tree, or it cuts only the core. The former case is handled with a simple dynamic programming without recursion, while the latter requires a recursive low-conductance cut algorithm on the core; the algorithm tries both cases and takes the better option. Our algorithm does this for each of the k many j -trees and takes the best cut overall, amounting to k recursive low-conductance cut calls. Finally, since the graph has bounded degree, transitioning from sparsest cut back to low-conductance cut incurs only another constant factor loss in the approximation.

An immediate application of Theorem 2.8 gives

Corollary 2.9. *There is an $(O(\phi^{1/2} \log^{2.5} m), 100)$ -approximate balanced-cut algorithm that runs in deterministic $\widehat{O}(m^{\frac{2\omega-1}{\omega}})$ time on any multigraph $G = (V, E)$ with m edges, and any parameter ϕ .*

Proof. Given Theorem 2.8 the $(O(\phi^{1/2} \log m), 10)$ -approximate balanced-cut algorithm that runs in deterministic $\widehat{O}(n^\omega)$ time of Theorem 2.7 and setting k to $m^{\frac{\omega-1}{\omega}}$ give an

$$\left(O(\log n) \cdot O\left(\phi^{1/2} \log^{1.5} m\right), 10 \cdot 10\right) = \left(O\left(\phi^{1/2} \log^{2.5} m\right), 100\right)$$

-approximate balanced-cut algorithm with running time

$$\widehat{O}\left(m^{\frac{\omega-1}{\omega}} \left(m + \widehat{O}\left(\left(m/m^{\frac{\omega-1}{\omega}}\right)^\omega\right)\right)\right) = \widehat{O}\left(m^{\frac{\omega-1}{\omega}} \left(m + \left(m/m^{\frac{\omega-1}{\omega}}\right)^\omega\right)\right) = \widehat{O}\left(m^{\frac{2\omega-1}{\omega}}\right).$$

□

Of course, just as in the construction by Madry [Mad10], it is tempting to invoke the size reductions given in Theorem 2.8 recursively. Such recursions will lead to a larger overhead on conductance, which in turn factors only into the running time of the k -vertex-cut algorithm as stated in Theorem 2.4. However, we obtain a faster running time by using recursion to speed up the dense case instead. By combining balanced cuts with graph sparsification. We perform a 4-way recursion akin to the one used for random spanning trees in [DKP⁺17] to obtain the following result in Section 9.

Theorem 2.10. *Given any $(f(\phi), c)$ -approximate balanced-cut routine APPROXBALCUT in time m^θ for some $1 < \theta \leq 2$ such that $f(\phi) \leq \phi^\xi n^{o(1)}$ for some absolute constant $0 < \xi \leq 1$, we can obtain an $(n^{o(1)} \cdot f(\phi), c)$ -approximate balanced-cut routine with running time*

$$\widehat{O}\left(n^{2\theta-2} m^{2-\theta}\right) = \widehat{O}\left(n^2\right).$$

This result immediately implies a running time of $\widehat{O}(n^2)$ for dense graphs, but at the cost of higher approximation factors compared to the matrix-inverse based one given in Theorem 2.7. By further combination with previous algorithms, we obtain our third runtime bound.

Corollary 2.11. *There is an $(\phi^{1/2}n^{o(1)}, 1000)$ -approximate balanced-cut algorithm that runs in deterministic $\widehat{O}(m^{1.5})$ time on any multigraph $G = (V, E)$ with m edges, and any parameter ϕ .*

Proof. By Corollary 2.9 and since $\omega < 2.38$, we have an $(O(\phi^{1/2} \log^{2.5} m), 100)$ -approximate balanced-cut algorithm that runs in deterministic $m^{1.58}$ time on any multigraph $G = (V, E)$ with m edges, and any parameter ϕ . We can apply Theorem 2.10 with $\xi = 1/2$ on this algorithm to get an $(n^{o(1)} \cdot O(\phi^{1/2} \log^2 m), c)$ -approximate balanced-cut routine with running time $\widehat{O}(n^2)$.

Then we give the algorithm to Theorem 2.8 with $k = m^{0.5}$ to get an $(n^{o(1)} \cdot O(\phi^{1/2} \log^3 m), 1000)$ -approximate balanced-cut algorithm with running time

$$\widehat{O}\left(m^{0.5} \left(m + \widehat{O}\left((m/m^{0.5})^2\right)\right)\right) = \widehat{O}\left(m^{0.5} \left(m + (m/m^{0.5})^2\right)\right) = \widehat{O}(m^{1.5}).$$

□

2.4 Putting Everything Together

We can now combine the pieces to obtain a sub-quadratic algorithm for vertex connectivity.

Proof of Theorem 1.1. By plugging the algorithm from Corollary 2.11 to Theorem 2.6 with $c = 1000$ and $f(\phi) = \phi^{1/2}n^{o(1)}$. This results in an $n^{o(1)}$ -approximation to the minimum vertex expansion on a graph with n vertices and m edges with running time

$$O(\log n) \cdot \widehat{O}\left((n \cdot O(\log n))^{1.5}\right) + \widehat{O}(m^{1.5}) = \widehat{O}(m^{1.5}).$$

Finally, we can use Theorem 2.4 with $\theta = 1.5 + o(1)$ on the minimum vertex expansion routine above, computing a k -vertex cut or determining if none exists, when $k < n^{1/8}$, in time

$$\widehat{O}\left(m + \min\left\{n^{1.75}k^{1+\frac{k}{2}}, n^{1.9}k^{2.5}\right\}\right),$$

which is the desired result of Theorem 1.1 when $k \geq 2$. □

We remark that while there are many other ways of combining the various pieces for graph partitioning, specifically Lemmas 8.15 and Theorem 2.10, we believe it is unlikely for an algorithm built from just these pieces to obtain a running time of $o(m^{1.5})$. A (somewhat cyclic) way of seeing this is to consider the gains of applying of these tools once when starting from an m^θ time algorithm (for some $1 < \theta < 2$): Theorem 2.10 implies that a dense graph can be solved in time

$$n^{2\theta-2}m^{2-\theta},$$

which when plugged into the j -tree recurrence given by Lemmas 8.15 gives a running time of

$$k \cdot \left(m + \left(\frac{n}{k}\right)^{2\theta-2} m^{2-\theta}\right).$$

To simplify this, we first consider the sparse case where $n \approx m$, where the above runtime simplifies to

$$k \cdot \left(n + \left(\frac{n}{k}\right)^{2\theta-2} n^{2-\theta}\right) = kn + n^\theta k^{3-2\theta}.$$

Observe that if $\theta > 1.5$, then $k^{3-2\theta} < 1$ and we can set $k = \sqrt{n}$ so that the running time is $kn + n^\theta k^{3-2\theta} = n^{1.5}$. For general m , this approach speeds up an m^θ -time algorithm to an algorithm with $\widehat{O}(m^{1.5})$ running time. On the other hand, if $\theta \leq 1.5$, then $k^{3-2\theta} \geq 1$ and so the running time is at least n^θ , which means that setting $k > 1$ does not help. This suggests that any further improvements beyond $o(m^{1.5})$ requires new tools.

3 Related Works

In the broadest sense, our results are related to the derandomization of graph algorithms, which is a well studied topic [Rei08, KT19, HRW17, MRSV17]. Deterministic algorithms have a wide range of practical advantages, such as the reproducibility of errors, that make them significantly more preferable in areas such as numerical analysis and high performance computing. While there has been extensive work on pseudorandomness and derandomization [BFNW91, NW94, IW97, Uma03, CIS18], the pursuit of more efficient deterministic graph algorithms is much more fine grained. Even if one can show that $BPP \subseteq P$, it is not clear that any randomized nearly-linear time algorithm can also be derandomized to run in nearly-linear time.

With a few exceptions such as computing global minimum cuts [KT19, HRW17], most problems involving graph cuts have significantly faster randomized algorithms than deterministic ones.

3.1 k -Vertex Connectivity

Vertex connectivity has been studied extensively in graph algorithms. For the $k \leq 3$ case, deterministic $O(m)$ time algorithms were given by Tarjan [Tar72] and Hopcroft and Tarjan [HT73], and were one of the primary motivations for studying depth first searchers. For $k \geq 4$, there is a long list of algorithms, starting from the five-decade-old $O(n^2)$ -time algorithm of Kleitman [Kle69] when $k = O(1)$ and $m = O(n)$ and many others for larger values of k and m [LLW86, KR87, NI92, HRG96].

However, even for the case of $k = 4$, no sub-quadratic deterministic algorithms are known. Even with randomization, a subquadratic time algorithm was only given recently by Nanongkai et al. [NSY19a, NSY19b]. Their algorithm runs in subquadratic (i.e. $O(m + n^{2-\theta})$ for some constant $\theta > 0$) time when $k = o(n^{2/3})$, and near-linear time for constant values of k .

3.2 Graph Partitioning

Algorithms for approximating minimum conductance cuts have been extensively studied. A partial list of results that fit into our notion of $(f(\phi), \beta)$ -approximate balanced-cuts from Definition 2.5 is given in Table 1.

This problem (in general case) can be solved in $\tilde{O}(m)$ time by randomized algorithms (e.g. by flow-based algorithms [KRV09, KLOS14, She13, Pen16] or spectral-based algorithms [ST04, ACL06, OV11, OSV12]). However, previous deterministic algorithms still take $\Omega(mn)$ time by, for example, computing PageRank vectors [ACL06] from every vertex. Such a runtime upper bound is not sufficient for a sub-quadratic time vertex-cut algorithm.

We note that, if the balance guarantee is not needed, it is known how to solve this problem in $O(n^\omega)$ since the 80's (see e.g. [Alo86]). One can compute the second eigenvector v_2 of the

laplacian matrix of G deterministically in $O(n^\omega)$ time [PC99], and perform a “sweep cut” defined by v_2 in $O(m)$ time. As observed in [Alo86, JS88], the returned cut S will have conductance at most $O(\sqrt{\phi^*})$ if there exists a cut with conductance ϕ^* . However, there is no guarantee about the balance of S . Our running time for approximate balanced cuts matches the bound. However, the balance guarantee is crucial for efficiently partitioning graphs: otherwise one could repeatedly remove $O(1)$ sized vertex subsets, leading to an $\Omega(n)$ factor overhead.

While undirected graph partitioning takes randomized nearly-linear time via reductions to approximate maximum flow [She09, Pen16], in general it is a fundamental question whether there is a deterministic almost linear time algorithm as well. Prior to this paper, the best deterministic algorithm takes $O(mn)$ time via PageRank [ACL06]. Our algorithms are the first deterministic approximate balanced cut algorithm with subquadratic runtime, as well as the first with subcubic runtime on dense graphs.

4 Structural Properties of Vertex-Cuts

Throughout this section, we fix a connected graph $G = (V, E)$ and an arbitrary separation triple (L, S, R) in G .

In this section show the top-level structural result that enables recursive k -vertex-connectivity algorithms.

Theorem 2.2. *For any separation triple (L, S, R) , consider forming the graph H_L by*

1. *removing all vertices of R ,*
2. *replacing R with a clique K_{right} of size k , and*
3. *adding a biclique between S and K_{right} ,*

as well as H_R symmetrically. Then G is k -connected if and only if

1. $|S| \geq k$.
2. *Both the graphs H_L and H_R are k -connected.*
3. *Each pair $x, y \in S$, x and y are k -connected.*

We first formally define the left subgraph H_L of G , and right subgraph H_R of G as follows.

Definition 4.1 (H_L and H_R). Given a connected graph G , a separation triple (L, S, R) , and a positive integer k , we define two subgraphs H_L and H_R as follows. We define $H_L = (V_L, E_L)$ where

$$V_L = V_{1,L} \sqcup V_{2,L} \quad \text{and} \quad E_L = E_{1,L} \sqcup E_{2,L} \sqcup E_{3,L}, \quad (1)$$

where \sqcup denotes disjoint union of sets, and sets in Equation (1) are defined as follows.

- $V_{1,L} = L \sqcup S$.
- $V_{2,L}$ is the set of k new vertices.
- $E_{1,L}$ is the set of edges from the induced subgraph $G[L \sqcup S]$.
- $E_{2,L} = \{(u, v) : u \in S, v \in V_{2,L}\}$.
- $E_{3,L} = \{(u, v) : u \neq v, u \in V_{2,L}, \text{ and } v \in V_{2,L}\}$.

Similarly, we define $H_R = (V_R, E_R)$ where

$$V_R = V_{1,R} \sqcup V_{2,R} \quad \text{and} \quad E_R = E_{1,R} \sqcup E_{2,R} \sqcup E_{3,R}, \quad (2)$$

where sets in Equation (2) are defined as follows.

- $V_{1,R} = S \sqcup R$.
- $V_{2,R}$ is the set of k new vertices.
- $E_{1,R}$ is the set of edges from the induced subgraph $G[S \sqcup R]$.
- $E_{2,R} = \{(u, v) : u \in V_{2,R}, v \in S\}$.
- $E_{3,R} = \{(u, v) : u \neq v, u \in V_{2,R}, \text{ and } v \in V_{2,R}\}$.

Remark 4.2. From Definition 4.1, $H_L[V_{2,L}]$ is a clique of size k such that every vertex in S has an edge to all vertices in $V_{2,L}$. Symmetrically, $H_R[V_{2,R}]$ is a clique of size k such that every vertex $V_{2,R}$ has an edge to all vertices in S .

4.1 Interactions Between Two Separating Triples

When we consider two separation triples (L, S, R) and (L', S', R') , it is useful to draw a standard *crossing diagram* as shown in Figure 1. For example, the neighbors of a “quadrant”, e.g. $L \cap R'$ are contained in parts of the two vertex-cuts.




Figure 1: A crossing-diagram for two separation triples (L, S, R) and (L', S', R') . The neighbors of $L \cap R'$ is a subset of $(R' \cap S) \cup (S' \setminus R)$.

Proposition 4.3. *Let (L', S', R') and (L, S, R) be any two separation triples. We have $N(L \cap R') \subseteq (R' \cap S) \cup (S' \setminus R)$.*

Proof. By Definition A.4, there is no edge between L and R . Also, there is no edge between L' and R' . Thus, a neighbor u of $L \cap R'$ cannot be in $L' \cup R$ or in $L \cap R'$. Therefore, if $x \in R'$, then $x \in R' \cap S$, and if $x \notin R'$, then $x \in S' \setminus R$. \square

Theorem 4.4 ([NI92]). *Given an undirected graph $G = (V, E)$, there is an $O(m)$ -time algorithm that partitions E into a sequence of forests $F_k, k = 1, \dots, n$ such that the forest subgraph $H_k = (V, \bigcup_{i=1}^k F_i)$ is k -connected if and only if G is k -connected. In addition, any vertex set of size $< k$ is a vertex-cut in G if and only if it is a vertex-cut in H_k . Furthermore, H_k has arboricity k , meaning that $|E(S, S)| \leq k|S|$ for any subset $S \subseteq V$.*

4.2 Proof of Theorem 2.2: Part 1 (Sufficiency)

We first show that the conditions are sufficient. To do this, we show the contrapositive: if G has a vertex-cut of size smaller than k , then at least one of the conditions in Theorem 2.2 is false.

If either condition 3 or 4 is false, then we are done.

Otherwise, we show that H_L or H_R is not k -connected.

We now assume that G has a vertex cut of size smaller than k . This means $\kappa_G < k$. We denote (L^*, S^*, R^*) as an optimal separation triple. Note that $|S^*| = \kappa_G \leq k - 1$.

Claim 4.5. *We have $S \cap L^* = \emptyset$ or $S \cap R^* = \emptyset$.*

Proof. Suppose otherwise that $S \cap L^* \neq \emptyset$ and $S \cap R^* \neq \emptyset$. There exists $u \in S \cap L^*$, and $v \in S \cap R^*$. Hence, $u \in S$ and $v \in S$, and so $\kappa_G(u, v) \geq k$. On the other hand, $u \in L^*$ and $v \in R^*$. Therefore, $\kappa_G(u, v) = \kappa_G < k$, which is a contradiction. \square

We now assume WLOG that $S \cap R^* = \emptyset$. The case $S \cap L^* = \emptyset$ is similar.

Claim 4.6. *There exists a vertex $x \in S \cap L^*$, and another vertex $y \in (L \sqcup R) \cap R^*$.*

Proof. Since $|S| \geq k > |S^*|$ and $S \cap R^* = \emptyset$, there exists a vertex $x \in S \cap L^*$. Also, since $S \cap R^* = \emptyset$, we have $R^* \cap (L \sqcup R) \neq \emptyset$. In particular, $L \cap R^* \neq \emptyset$, or $R \cap R^* \neq \emptyset$. \square

By Claim 4.6, $y \in L \cap R^*$ or $y \in R \cap R^*$. We assume WLOG that $y \in L \cap R^*$. The other case is similar. So far, we have that

$$S \cap R^* = \emptyset, \quad x \in S \cap L^*, \quad \text{and} \quad y \in L \cap R^*. \quad (3)$$

Figure 2 shows the corresponding crossing diagram from Equation (3) with additional facts from the following claim.

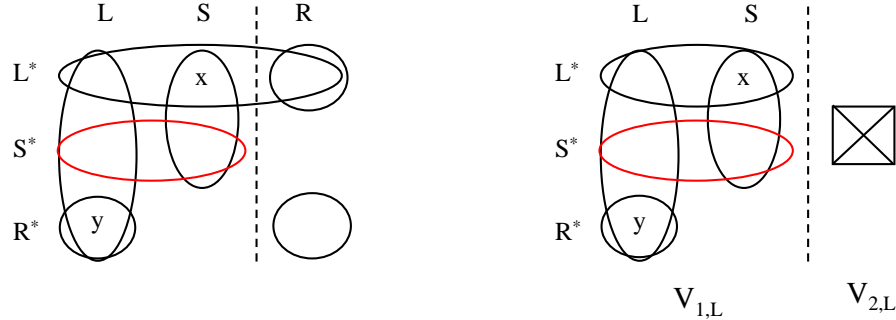


Figure 2: A crossing-diagram for two separation triples (L, S, R) and (L^*, S^*, R^*) before and after transformation from G to H_L .

Claim 4.7. *For the two separation triples (L, S, R) and (L^*, S^*, R^*) in G ,*

1. $N(L \cap R^*) \subseteq S^* \setminus R$,
2. S^* is an (x, y) -vertex-cut in G , and
3. $S^* \cap R = \emptyset$.

Proof. We first show that $N(L \cap R^*) \subseteq S^* \setminus R$. By Proposition 4.3, $N(L \cap R^*) \subseteq (R^* \cap S) \sqcup (S^* \setminus R)$. By Equation (3), $S \cap R^* = \emptyset$. Therefore, $N(L \cap R^*) \subseteq S^* \setminus R$. Next, S^* is an (x, y) -vertex-cut in G . Since $x \in S \cap L^*$ and $y \in L \cap R^*$, $x \in L^*$ and $y \in R^*$. Therefore, the claim follows.

We now show that $S^* \cap R = \emptyset$. Since $N(L \cap R^*)$ is an (x, y) -vertex-cut in G , and S^* is the smallest vertex-cut, we have $|N(L \cap R^*)| \geq |S^*|$. Since $N(L \cap R^*) \subseteq (S^* \setminus R) \subseteq S^*$, $|N(L \cap R^*)| \leq |S^* \setminus R| \leq |S^*|$. Therefore, we have $|S^*| \leq |N(L \cap R^*)| \leq |S^* \setminus R| \leq |S^*|$. In particular, $|S^* \setminus R| = |S^*|$. \square

It remains to show that S^* is also a vertex-cut in H_L as suggested by Figure 2. We now make the argument precise.

Claim 4.8. *After transformation from G to H_L by Definition 4.1, vertices x and y are in H_L . The set S^* and $L \cap R^*$ do not change. In other words, for the left-subgraph H_L , we have,*

1. $x \in V_{1,L}$,
2. $y \in V_{1,L}$,
3. $S^* \subseteq V_{1,L}$, and
4. $L \cap R^* \subseteq V_{1,L}$.
5. $N(L \cap R^*) \subseteq V_{1,L}$.

Proof. By Definition 4.1, for any node v in G , if $v \in L \sqcup S$, then $v \in V_{1,L}$. We will use this fact throughout the proof. We now show first two items. By Equation (3), $x \in S \cap L^*$ and $y \in R^* \cap L$. Thus, $x \in S$ and $y \in L$. Since x and y are both in the set $L \sqcup S$, $x \in V_{1,L}$ and $y \in V_{1,L}$. Next, we show that $S^* \subseteq V_{1,L}$. By Claim 4.7 part 3, $S^* \cap R = \emptyset$. Thus, $S^* \subseteq L \sqcup S$. Therefore, $S^* \subseteq V_{1,L}$. Next, we show that $L \cap R^* \subseteq V_{1,L}$. Since $L \cap R^*$, we have $L \cap R^* \subseteq L$. Therefore, $L \cap R^* \subseteq V_{1,L}$. Finally, we show that $N_{H_L}(L \cap R^*) \subseteq V_{1,L}$. By Claim 4.7 part 1, we have $N(L \cap R^*) \subseteq S^*$ in G . Also, $S^* \subseteq V_{1,L}$ in H_L . Therefore, $N(L \cap R^*) \subseteq S^*$ in H_L . \square

Lemma 4.9. *The left subgraph H_L is not k -connected.*

Proof. Since $|S^*| < k$, it is enough to show that S^* is an (x, y) -vertex-cut in H_L . To do so, we prove four items (all in H_L).

- $N(L \cap R^*) \subseteq S^*$.
- $y \in L \cap R^*$.
- $x \notin L \cap R^*$.
- $x \notin S^*$.

We prove the first item. By Claim 4.7 part 1, we have $N(L \cap R^*) \subseteq S^*$ in G . By Claim 4.8 part 3, 4 and 5, the set S^* , $L \cap R^*$, and $N(L \cap R^*)$ exist in H_L . By Definition 4.1, the new edges in H_L do not join any vertex in L . In particular, the new edges do not join any vertex in $L \cap R^*$. This means $N(L \cap R^*)$ does not change after transformation from G to H_L . Therefore, $N(L \cap R^*) \subseteq S^*$ in H_L . Next, we show that $y \in L \cap R^*$ in H_L . By Equation (3), $y \in L \cap R^*$ in G . By Claim 4.8 part 2, y exists in H_L . Therefore, $y \in L \cap R^*$ in H_L . Next, we show that $x \notin L \cap R^*$ in H_L . By Equation (3), $x \in S \cap L^*$ in G . Hence, $x \notin L$ and $x \notin R^*$ in G . By Claim 4.8 part 1, x exists in H_L . Therefore, $x \notin L \cap R^*$ in H_L . Finally, we show that $x \notin S^*$ in H_L . By Claim 4.7 part 2, S^* is an (x, y) -vertex-cut in G . Hence, $x \notin S^*$ in G , which means $x \notin S^*$ in H_L . \square

Remark 4.10. It is possible that H_R is not k -connected when the two assumptions from above are different.

4.3 Proof of Theorem 2.2: Part 2 (Necessity)

It remains to show the other direction. That is, we show that if not all the conditions in Theorem 2.2 are true, then G has a vertex-cut of size smaller than k . Before the proof, we start with simple observation.

Lemma 4.11. *For any separation triple (L', S', R') in H_L (or H_R) such that $|S'| < k$, $S' \not\subseteq V_{2,L}$ (or $V_{2,R}$). That is, the clique $V_{2,L}$ (or $V_{2,R}$) in Definition 4.1 of size k does not contain the vertex-cut S' .*

Proof. We prove the result for H_L . The proof for the case H_R is similar. Suppose $S' \subseteq V_{2,L}$. Let $H'_L = H_L - S'_H$. The new graph H'_L is essentially the same as H_L except that the modified clique $V'_{2,L} = V_{2,L} \setminus S'$ has size $k - |S'| \geq 1$ (since $|S'| < k$). In essence, the graph H'_L has the same structure as H_L , but with a smaller clique. That is, from the separation triple (L, S, R) in G , we obtain the graph H'_L by contracting R into a clique of size at least 1. Since G is connected and by Definition 4.1, H'_L is connected. Therefore, S' does not disconnect H_L , contradicting to the fact that S' is a vertex-cut. \square

Observation 4.12. *The clique $V_{2,L}$ (or $V_{2,R}$) cannot span both L' and R' . That is, if $V_{2,L} \cap L' \neq \emptyset$, then $V_{2,L} \cap R' = \emptyset$. Likewise, if $V_{2,L} \cap R' \neq \emptyset$, then $V_{2,L} \cap L' = \emptyset$.*

Proof. Suppose $V_{2,L} \cap R' \neq \emptyset$, and $V_{2,L} \cap L' \neq \emptyset$. There is an edge between L' and R' since $V_{2,L}$ is a clique. Therefore, we have a contradiction since (L', S', R') is a separation triple, but there is an edge between L' and R' . \square

Lemma 4.13. *If there is a separation triple (L', S', R') in H_L (or H_R) such that $|S'| < k$ and $V_{2,L} \cap L' \neq \emptyset$ (or $V_{2,R} \cap L' \neq \emptyset$), then there is a separation triple (L'', S'', R'') in H_L (or H_R) where $L'' = L' \cup V_{2,L}$, $S'' = S' \setminus V_{2,L}$, and $R'' = R'$. In particular, $|S''| \leq |S'|$ and $V_{2,L}$ (or $V_{2,R}$) $\subseteq L''$.*

Proof. We prove the result for H_L . The proof for the case H_R is similar. If $V_{2,L} \subseteq L'$, then we are done. Now, suppose otherwise. By Observation 4.12, we have $V_{2,L} \subseteq L' \sqcup S'$

We claim that $N(V_{2,L}) \subseteq L' \sqcup S'$. First of all, there is a vertex $z \in V_{2,L} \cap L'$ since $V_{2,L} \subseteq L' \sqcup S'$, $|S'| < k$ but $|V_{2,L}| = k$. Also, by Definition 4.1, $N(V_{2,L}) = S$. Suppose that there is a vertex $z' \in N(V_{2,L})$ such that $z' \in R'$. Since (1) $V_{2,L}$ is a clique that every node has edges to every vertex in $S = N(V_{2,L})$, (2) $z \in V_{2,L} \cap L'$ and (3) $z' \in N(V_{2,L}) \cap R'$, there is an edge between L' and R' . However, this contradicts to the fact that (L', S', R') is a separation triple where L' and R' cannot have an edge between each other. Therefore, the claim follows.

We construct a new separation triple in H_L as follows. Let $L'' = L' \cup V_{2,L}$, $S'' = S' \setminus V_{2,L}$, and $R'' = R'$. Clearly, $V_{2,L} \subseteq L''$, and $|S''| < k$.

We claim that the vertex set (L'', S'', R'') forms a separation triple in H_L . First of all, it is clear that L'' , S'' , and R'' form a partition of all vertices in H_L (i.e., they are pairwise disjoint, and $L'' \sqcup S'' \sqcup R'' = V_{H_L}$). It is enough to verify that L'' , S'' , and R'' are not empty, and that S'' is a vertex-cut in H_L . We first show that each set L'' , S'' , R'' is non-empty. Clearly, L'' and R'' are not empty since we add new elements to the set L' , and $R'' = R'$. We show that S'' is also non-empty. By Lemma 4.11, there is a vertex in S' that is not in the clique $V_{2,L}$. Also, we only move $V_{2,L}$ from S' to L' . Therefore, S'' is not empty. We now show that S'' is a vertex-cut in H_L . Since $N(V_{2,L}) \subseteq L' \sqcup S'$, and $L' \sqcup S' = L'' \sqcup S''$, we have $N(V_{2,L}) \subseteq L'' \sqcup S''$. Also, R'' is not an empty set. Hence, $H_L - S''$ has no path from any vertex in $V_{2,L}$ to any vertex in R'' . Therefore, S'' is a vertex-cut in H_L . \square

Remark 4.14. If $V_{2,L} \cap R' \neq \emptyset$ for the separation triple (L', S', R') , then we can swap L' and R' so that we can still apply Lemma 4.13.

Lemma 4.15. *If H_L has a vertex-cut S' corresponding to the separation triple (L', S', R') such that $|S'| < k$ and $V_{2,L} \subseteq L'$, then S' is also a vertex-cut in G .*

Proof. Since $|S'| < k$, we only need to show that S' is a vertex-cut in G . Since $V_{2,L} \subseteq L'$, we have $N_{H_L}(V_{2,L}) \subseteq L' \sqcup S'$. This means $H_L - S'$ has no paths from any vertex in $V_{2,L}$ to any vertex in R' . Hence, by Definition 4.1, $G - S'$ has no paths from any vertex in R (the set R was contracted into a $V_{2,L}$) to any vertex in R' . Therefore, S' is a vertex-cut in G . \square

To finish the proof of Theorem 2.2, we show that if not all the conditions in Theorem 2.2 are true, then G has a vertex-cut of size smaller than k .

If $|S| < k$ or $\kappa_G(x, y) < k$ for some $x, y \in S$, then we are done. Suppose now that $|S| \geq k$ and $\kappa_G(x, y) \geq k$. This implies H_L (or H_R) is not k -connected. We show that an optimal vertex-cut in H_L or H_R whose size is smaller than k can be used to construct a vertex-cut in G of size smaller than k .

We assume WLOG that H_L contains a vertex-cut of size smaller than k . The other case that H_R contains a vertex-cut of size smaller than k is similar.

Let (L^*, S^*, R^*) be an optimal separation triple in H_L . Note that the vertex-cut S^* has size $< k$. We claim that $V_{2,L} \subseteq L^*$ or $V_{2,L} \subseteq R^*$. Suppose that $V_{2,L} \not\subseteq L^*$ and $V_{2,L} \not\subseteq R^*$. By Observation 4.12, we have $V_{2,L} \cap S^* \neq \emptyset$. By Lemma 4.13, we obtain a new separation triple $(L^* \cup V_{2,L}, S^* \setminus V_{2,L}, R^*)$. Clearly, $|S^* \setminus V_{2,L}| < |S^*|$ since $V_{2,L} \cap S^* \neq \emptyset$. However, this is impossible since S^* is the smallest vertex-cut, a contradiction.

We now show that G has a vertex-cut of size at most k . Since S^* is an optimal vertex-cut, H_L has a vertex-cut S^* corresponding to the separation triple (L^*, S^*, R^*) such that $|S^*| < k$, and $V_{2,L} \subseteq L^*$ (if $V_{2,L} \subseteq R^*$, we can swap L^* and R^*). By Lemma 4.15, S^* is also a vertex-cut in G .

4.4 Vertex-Expansion and k -Connectivity

Definition 4.16 (Vertex expansion of a separation triple $h(L, S, R)$). Given a separation triple (L, S, R) , the *vertex expansion* of (L, S, R) , $h(L, S, R)$, is $\frac{|S|}{\min(|L|, |R|) + |S|}$.

Definition 4.17 (Vertex expansion of a graph $h(G)$). the *vertex expansion* of G , $h(G)$, is $\min_{(L,S,R) \in G} h(L, S, R)$, i.e., the minimum vertex expansion over all separation triples in G .

Proposition 4.18. *For any separation triple (L, S, R) , $\min(|L|, |R|) \leq n/2$.*

Proof. Suppose $\min(|L|, |R|) > n/2$. We have $|L| + |R| = \min(|L|, |R|) + \max(|L|, |R|) > n/2 + n/2 = n$, which is a contradiction. \square

Proposition 4.19. *If $h(L, S, R) \leq \eta$, then*

- $\min(|L|, |R|) \geq (1/\eta - 1)\kappa_G$.
- $|S| \leq n\eta/(2 - 2\eta)$.

Proof. By definition of vertex-expansion Definition 4.16, we have the following equations:

$$\begin{aligned} |S|/(\min(|L|, |R|) + |S|) &\leq \eta, \\ |S| &\leq \eta(\min(|L|, |R|) + |S|), \\ |S|(1 - \eta) &\leq \eta \min(|L|, |R|). \end{aligned}$$

Hence, we get $|S| \leq \min(|L|, |R|)\eta/(1-\eta)$, which is at most $n\eta/(2-2\eta)$ by Proposition 4.18. We also get $\min(|L|, |R|) \geq (1/\eta - 1)|S|$, which is at least $(1/\eta - 1)\kappa_G$ since $|S| \geq \kappa_G$. \square

Proposition 4.20. *If $h(G) \geq \eta$, and there is no separation triple (L, S, R) such that $\min(|L|, |R|) \leq 2k/\eta$ and $|S| < k$, then G is k -connected.*

Proof. Suppose G has a separation triple (L', S', R') such that $|S'| < k$. By the given condition, $\min(|L'|, |R'|) > 2k/\eta$. Therefore, we have

$$\eta \leq h(L', S', R') = \frac{|S'|}{\min(|L'|, |R'|) + |S'|} < k / \min(|L'|, |R'|) < \eta/2.$$

The first inequality follows from $h(G) \geq \eta$, and Definition 4.17, the second equality follows from Definition 4.16. The third inequality follows from $|S'| < k$. The last inequality follows from $\min(|L'|, |R'|) > 2k/\eta$. Therefore, $\eta < \eta/2$, and we have a contradiction. \square

Corollary 4.21. *For $a \in (0, 1)$, if $h(L, S, R) \leq 1/(2n^{1-a-o(1)})$, then*

- $\min(|L|, |R|) \geq n^{1-a-o(1)}$.
- $|S| \leq n^{a+o(1)}/2$.

Proof. The results follows from By Proposition 4.19 where we use $\eta = 1/(2n^{1-a-o(1)})$. By Proposition 4.19, we get $\min(|L|, |R|) \geq (1/\eta - 1)\kappa_G$, which is $\geq (1/\eta - 1) = 2n^{1-a-o(1)} - 1 \geq n^{1-a-o(1)}$. By Proposition 4.19, we have $|S| \leq n\eta/(2-2\eta) = (n/2)(1/(2n^{1-a-o(1)} - 1)) \leq (n/2)(1/n^{1-a-o(1)}) \leq n^{a+o(1)}/2$. \square

5 Deterministic Vertex Connectivity Algorithm

In this section we give our main vertex connectivity algorithm. Our main result is

Theorem 2.4. *Given a routine that computes $n^{o(1)}$ -approximations to the minimum vertex expansion of an undirected unweighted graph G with m edges in time m^θ for some $\theta > 1$, we can compute a k -vertex cut, or determine if none exists, when $k < n^{1/8}$, in time*

$$\widehat{O}\left(m + \min\left\{n^{1+\frac{1}{2}\theta}k^{1+\frac{k}{2}}, n^{1+\frac{3}{5}\theta}k^{\frac{8}{5}+\frac{3}{5}\theta}\right\}\right).$$

5.1 Overview

Our algorithm is based on two structural lemmas about k -connectivity. Recall from Definition 2.3 that the vertex expansion of a separation triple (L, S, R) is $h(L, S, R) = \frac{|S|}{\min(|L|, |R|) + |S|}$ and the vertex expansion of a graph G is $h(G) = \min_{(L, S, R) \in \mathcal{G}} h(L, S, R)$.

The first observation is the following. Suppose that the vertex expansion of G is $h(G) \geq \gamma$ for some parameter γ . Then, any separation triple (L, S, R) of size less than k must be such that either $|L| < k\gamma^{-1}$ or $|R| < k\gamma^{-1}$ because otherwise its vertex expansion is $h(L, S, R) < k/(k\gamma^{-1}) \leq \gamma$. Therefore, G is not k -connected if and only if there is a set $L \subset V$ where $|L| \leq k\gamma^{-1}$ and $|N(L)| < k$ where $N(L)$ is the neighbors of L . Note that

$$\text{vol}(L) \leq 2|E(L, L)| + E(L, N(L)) \leq 2k|L| + k|L| = O(\gamma^{-1}),$$

because G has arboricity at most k .

This is exactly where the *local vertex connectivity* (LocalVC) algorithm introduced in [NSY19a] can help us. This algorithm works as follows: given a vertex x in a graph G and parameters ν and k , either

1. certifies that there is no set $S \ni x$ where $\text{vol}(S) \leq \nu$ and $|N(S)| < k$, or
2. returns a set $S \ni x$ where $|N(S)| < k$. See Definition 5.1 for a formal definition.

There are currently two deterministic algorithms for this problem: an $\widehat{O}(\nu^{1.5}k)$ -time algorithm by a subset of the authors [NSY19a] and an $\widehat{O}(\nu k^k)$ -time algorithm via a slight adaptation of the algorithm by Chechik et al. [CHI+17].

For simplicity, we will assume that k is a constant, and use the $\widehat{O}(\nu k^k)$ -time bound here, which by our assumption we view as $\widehat{O}(\nu)$ time.

From the above observation about the set L , it is enough to run the LocalVC algorithm from every vertex x with a parameter $\nu = O(n\gamma^{-1})$ to decide if such L exists. This takes $\widehat{O}(n\gamma^{-1})$ total time to decide k -connectivity of G with the assumption $h(G) \geq \gamma^{-1}$.

To remove the assumption, we start by calling our deterministic vertex expansion algorithm. As described in Section 2.4, on sparse graphs this routine finds in $\widehat{O}(n^{1.5})$ time a separating triple (L, S, R) such that

$$h(L, S, R) \leq h(G) \cdot n^{o(1)}.$$

If $h(G) \geq \widehat{O}(\gamma^{-1})$, then the above algorithm based on local vertex connectivity can be immediately invoked. So it suffices to consider the remaining case where $h(L, S, R) \leq \gamma$.

Notice that, in this case, we have:

$$|L|, |R| \geq \gamma^{-1}, \text{ and} \tag{4}$$

$$|S| \leq n \cdot \gamma \tag{5}$$

That is, the cut is quite balanced, and we can thus use divide-and-conquer.

For such a separation (L, S, R) with $h(L, S, R) \leq \gamma$, we first check if $|S| \geq k$ and whether every pair of $x, y \in S$ are k -vertex-connected. By simple augmenting-path based max-flow routines (such as the Ford-Fulkerson algorithm), this takes time

$$|S|^2 \cdot O(mk) \leq |S|^2 \cdot O(nk^2) \leq \widehat{O}(n^3\gamma^2k^2),$$

where the first inequality follows from being able to trim the graph down to the first k spanning trees.

In Appendix B, we will also show a faster algorithm that is useful when $k = \omega(1)$.

If any of these $\text{poly}(|S|)$ checks returns a small cut, then we're done. Otherwise, by the structural property of separating triples given in Theorem 2.2 and proven in Section 4, it suffices to check recursively if H_L and H_R (which are L and R with extra vertices attached, see statement of Theorem 2.2) are both k -connected. In Section 5.4, we perform a detailed analysis of the running time of this recursion. For small values of k , and ignoring overheads coming from the extra edges in H_L and H_R , the running time recurrence that we obtain in terms of γ is essentially

$$T(n) = \max \left\{ n\gamma^{-1}, \max_{n_1+n_2=n, |n_1|, |n_2| \geq \gamma^{-1}} T(n_1) + T(n_2) + \widehat{O}(n^3\gamma^2) + \widehat{O}(n^{1.5}) \right\}.$$

The first term is maximized at the topmost level, so can be considered separately against the total cost of a recursion that always takes the second case. The depth of such a recursion is more or less bounded by the reduction in n at each step, which is γ^{-1} . So the total layers of recursion is $\widehat{O}(n\gamma)$, and as the total size of each level of recursion is n , the total work can be bounded by

$$T(n) \leq \widehat{O}(n^4\gamma^3 + n^{2.5}\gamma + n\gamma^{-1}).$$

This is minimized at $\gamma = n^{-0.75}$, for a total of $\widehat{O}(n^{1.75})$.

In the above back-of-the-envelope calculation, we treated k as a constant for simplicity. For larger values of k , specifically $k = \omega(\log n / \log \log n)$, we instead use the $\tilde{O}(\nu^{1.5}k)$ -time LocalVC algorithm by [NSY19a] as the running time of $O(\nu k^k)$ is too slow. In this situation, with our framework, a $O(m^{5/3-\epsilon})$ -time low-vertex-expansion algorithm is needed to break quadratic time for vertex-connectivity.

5.2 Algorithm

We now formalize this vertex connectivity algorithm that we outlined above. First, we formalize the local vertex connectivity routine that searches for a small cut starting from a single vertex.

Definition 5.1 (LocalVC). LocalVC(G, x, ν, k) is any algorithm that takes as input a pointer to any vertex $x \in V$ in an adjacency list representing a connected graph $G = (V, E)$, positive integers ν, k such that

$$\nu k \leq c_1 m \quad \nu + k \leq c_2 n \quad \text{and} \quad \min_{v \in V} \deg(v) \geq k \quad (6)$$

for some positive constant c_1, c_2 and outputs either a vertex-cut S corresponding to a separation triple (L, S, R) such that

$$x \in L, \quad \text{vol}(L) \leq O(\nu k), \quad \text{and} \quad |S| \leq k,$$

or the symbol \perp certifying that there is no separation triple (L, S, R) such that

$$x \in L, \quad \text{vol}(L) \leq \nu, \quad \text{and} \quad |S| \leq k.$$

Theorem 5.2 ([NSY19a, CHI⁺17]). *There is a deterministic LocalVC algorithm that runs in $\tilde{O}(\min(\nu^{3/2}k, \nu k^k))$ time.*

Definition 5.3 (SplitVC). SplitVC(G, S, k) is any algorithm that takes as input a connected graph $G = (V, E)$, a vertex-cut S , and positive integer k such that $|S| \geq k$, and decides if there exists a pair $x \in S$, and $y \in S$ such that $\kappa_G(x, y) < k$. If so, it returns an (x, y) -vertex-cut of size less than k . Otherwise, it returns \perp .

It is easy to see that we can implement SplitVC by using at most $|S|^2$ calls to max-flow. We show in Appendix B that it is possible to implement deterministic SplitVC with running time $O((|S| + k^2)mk)$.

Here, we denote n as the original input size, and treat n as a global variable. We denote $|V|$ as the size of the current input. Let $\Lambda = \max((8/c_1)k^2)^{1/a}, (9/c_2)k^2)^{1/a}, n^\epsilon) = \Theta(\max(k^{2/a}, n^\epsilon))$ where c_1 and c_2 are the constants in Equation (6), and $\epsilon > 0$ is sufficiently small constant.

Algorithm 1 MainVC(G, k, a, n)

Input: Graph $G = (V, E)$, integer $k > 0$, real $a \in (0, 1/2)$, integer $n > 0$.

Assumptions: G has aboricity k .

Output: A vertex-cut of size $< k$ or the symbol \perp certifying that $\kappa_G \geq k$.

```
1: if  $|V| \leq \Lambda$  then
2:   compute  $\kappa_G$  using any deterministic algorithm.
3:   return answer based on  $\kappa_G$ .
4: Let  $\eta = 1/(2|V|^{1-a})$ .
5: if  $h(G) \geq \eta$  then
6:   if  $\min_{v \in V} \deg(v) < k$  then
7:     return  $N(u_{\min})$  where  $u_{\min}$  is the vertex with minimum degree.
8:   Let  $\nu \leftarrow 6k^2/\eta$ .
9:   for each  $x \in V$  do
10:    if LocalVC( $G, x, \nu, k - 1$ ) returns a vertex-cut then ▷ Definition 5.1
11:    return the corresponding vertex-cut in  $G$ .
12:   return  $\perp$ .
13: Let  $(L, S, R)$  be a separation triple such that  $h(L, S, R) \leq \eta|V|^{o(1)}$ . ▷ Theorem 6.1
14: if  $|S| < k$ , or SplitVC( $G, S, k$ ) returns a vertex-cut then ▷ Definition 5.3
15:   return the corresponding vertex-cut in  $G$ .
16: Let  $H_L$  and  $H_R$  be the left and right subgraph from  $G$ , respectively. ▷ Definition 4.1
17: Let  $\tilde{H}_L$  and  $\tilde{H}_R$  be the sparsified graph from  $H_L$  and  $H_R$  respectively. ▷ Theorem 4.4
18: if MainVC( $\tilde{H}_L, k, a, n$ ) or MainVC( $\tilde{H}_R, k, a, n$ ) returns a vertex-cut then
19:   return the corresponding vertex-cut in  $G$ . ▷ Lemma 4.13.
20: return  $\perp$ .
```

5.3 Correctness

Lemma 5.4. *Algorithm 1 returns either a vertex-cut of size $< k$ or \perp certifying that G is k -connected.*

We use induction on number of vertices. We prove that given a connected graph G with n vertices, Algorithm 1 correctly returns a vertex-cut of size $< k$ or \perp . For the base case, if G has $\leq \Lambda$ vertices, we run any deterministic vertex-connectivity algorithm to decide if $\kappa_G < k$. For the inductive hypothesis, we assume that Algorithm 1 outputs correctly for any connected graph with at most r vertices where

$$r \geq \Lambda = \max((8/c_1)k^2)^{1/a}, (9/c_2)k^2)^{1/a}, n^\epsilon). \quad (7)$$

We show as an inductive step that Algorithm 1 outputs correctly for the graph with at most $r + 1$ vertices.

We fix an arbitrary connected graph $G = (V, E)$ with $r + 1$ vertices. By Theorem 4.4, we can also assume that G has aboricity k . Therefore, the precondition for Algorithm 1 is satisfied.

We first verify that preconditions in Equation (6) for LocalVC are satisfied. If G has minimum degree less than k , we can output the neighbors of the vertex of minimum degree. Otherwise, G has minimum degree at least k . It remains to verify $\nu + k \leq c_2|V|$, and $\nu k \leq c_1|E|$.

Claim 5.5. *Let ν and k be the numbers as defined in Algorithm 1 (line 8). Denote $n' = r + 1$, and m' as number of edges in G . We have $\nu + k \leq c_2 n'$ and $\nu k \leq c_1 m'$.*

Proof. Since G has aboricity k , $m' \leq n'k$. Therefore, it is enough to show that $\nu k < c_1 n'k$ and $\nu + k < c_2 n'$. By Equation (7), we have $n' \geq \Lambda \geq \max((8/c_1)k^2)^{1/a}, (9/c_2)k^2)^{1/a}$. By simple algebra using $\nu = 8k^2 n'^{1-a}$, $n' \geq ((8/c_1)k^2)^{1/a}$ implies $\nu k \leq c_1 n'k$, and $n' \geq ((9/c_2)k^2)^{1/a}$ implies $\nu + k \leq c_2 n'$. \square

Lemma 5.6. *If $h(G) \geq \eta$, then Algorithm 1 correctly outputs a vertex-cut of size at most k (line 11) or the symbol \perp (line 12).*

Proof. Suppose G has a separation triple (L, S, R) such that

$$\min(|L|, |R|) \leq 2k/\eta, \quad \text{and } |S| < k. \quad (8)$$

We claim that Algorithm 1 returns a vertex-cut of size at most k (line 11). We show that $\text{vol}(L) \leq 6k^2/\eta$. Without loss of generality, we assume $|L| \leq |R|$. By Equation (8), $|L| \leq 2k/\eta$. Since G has aboricity k , and $|L| \leq 2k/\eta$, we have $\text{vol}(L) \leq 2|E(L, L)| + |E(L, S)| \leq 2k|L| + k|L| = 6k^2/\eta$. Also, Algorithm 1 (line 11) runs LocalVC on every seed vertex. So far, we have that there is $x \in L$, and $\text{vol}(L) \leq 6k^2/\eta \leq \nu$, and $|S| \leq k - 1$. Also, by Claim 5.5, the preconditions for Theorem 5.2 are satisfied. Therefore, by Theorem 5.2, LocalVC at node x outputs a vertex-cut of size at most $k - 1$.

Suppose now that G has no separation triple (L, S, R) satisfying Equation (8). Recall that $h(G) \geq \eta$. Therefore, by Proposition 4.20, G is k -connected. In this case, by Theorem 5.2, LocalVC (line 11) always outputs \perp , and Algorithm 1 correctly returns the symbol \perp (line 12). \square

Therefore, if $h(G) \geq \eta$, then Lemma 5.6 says that Algorithm 1 outputs correctly. Now, suppose that $h(G) \leq \eta(r + 1)^{o(1)}$. We show that Algorithm 1 outputs correctly.

Lemma 5.7. *If $h(G) \leq \eta(r + 1)^{o(1)}$, then Algorithm 1 correctly outputs a vertex-cut of size at most k (line 15 or line 19) or the symbol \perp (line 20).*

Proof. Since $h(G) \leq \eta(r + 1)^{o(1)}$, there is a separation triple (L, S, R) such that $h(L, S, R) \leq \eta(r + 1)^{o(1)}$. If $|S| < k$, or we can find a pair of vertices x, y in S such that $\kappa(x, y) < k$, then Algorithm 1 (line 15) outputs the corresponding vertex-cut of size at most k , and we are done. Now, we assume $|S| \geq k$ and $\kappa(x, y) \geq k$ for all $x, y \in S$.

Since we set $\eta = 1/(2(r + 1)^{1-a})$, $h(L, S, R) \leq 1/(2(r + 1)^{1-a-o(1)})$. By Corollary 4.21, we have

$$\min(|L|, |R|) \geq (r + 1)^{1-a-o(1)}. \quad (9)$$

Let H_L and H_R be the left and right subgraphs as in Definition 4.1. We claim that the number of vertices of H_L and H_R are strictly smaller than n . We focus on H_L because the case H_R is similar. Suppose otherwise that number of vertices from G to H_L does not decrease. This means $k \geq |R|$ by Definition 4.1. By Equation (9), $|R| \geq \min(|L|, |R|) \geq (r + 1)^{1-a-o(1)}$. Therefore, $k \geq (r + 1)^{1-a-o(1)}$, so $r < k^{1/(1-a-o(1))}$, contradicting to Equation (7).

By Theorem 4.4, we obtain \tilde{H}_L and \tilde{H}_R where number of vertices does not change from that of H_L and H_R , which means the number of vertices are less than n . Also, both \tilde{H}_L and \tilde{H}_R have

abornicity k . Furthermore, any vertex-cut of \tilde{H}_L (\tilde{H}_R) with cardinality $< k$ is a vertex-cut in H_L (H_R). We now prove the inductive step.

Suppose G is not k -connected. We show that Algorithm 1 (line 19) returns a vertex-cut in G . By Theorem 2.2, H_L or H_R is not k -connected. By Theorem 4.4, \tilde{H}_L or \tilde{H}_R is not k -connected. Since \tilde{H}_L and \tilde{H}_R have less than n vertices, and they have abornicity k , Algorithm 1 returns a vertex-cut for \tilde{H}_L (or \tilde{H}_R) by inductive hypothesis. Also, any vertex-cut in \tilde{H}_L (or \tilde{H}_R) is a vertex-cut in H_L (or H_R). By Lemmas 4.13 and 4.15, we can construct the corresponding vertex-cut in G . Therefore, Algorithm 1 (line 19) finds a vertex-cut in G .

Suppose now that G is k -connected. We show that Algorithm 1 (line 20) returns the symbol \perp . By Theorem 2.2, H_L or H_R is k -connected. By Theorem 4.4, \tilde{H}_L or \tilde{H}_R is k -connected. Since \tilde{H}_L and \tilde{H}_R have fewer than n vertices, and they have abornicity k , Algorithm 1 returns the symbol \perp by inductive hypothesis. Therefore, Algorithm 1 (line 20) correctly return the symbol \perp . \square

Therefore, by Lemmas 5.6 and 5.7, we complete the proof of the inductive step that Algorithm 1 is correct for G of at most $r + 1$ vertices. Therefore, Lemma 5.4 is proved.

5.4 Running Time

Definition 5.8. We define the following running times for subroutines in Algorithm 1.

- An algorithm in the base-case runs in $T_{\text{base}}(m, n, k)$ time.
- Approximate vertex-expansion $h(G)$ runs in $T_h(m, n)$ time.
- $\text{LocalVC}(G, x, \nu, k - 1)$ runs in $T_{\text{local}}(\nu, k)$ time.
- $\text{SplitVC}(G, S, k)$ runs in $T_{\text{split}}(m, n, k, |S|)$ time.

Definition 5.9. We define t_{cost} , t_{local} , and t_{base} as follows.

- $t_{\text{cost}} = T_h(nk, n) + T_{\text{split}}(nk, n, k, n^{a+o(1)}) + O(nk)$.
- $t_{\text{local}} = T(k^2 n^{1-a}, k)$.
- $t_{\text{base}} = T_{\text{base}}(\Lambda k, \Lambda, k)$.

Lemma 5.10. *Algorithm 1 runs in time $\tilde{O}(t_{\text{cost}} n^{a+o(1)} + n(t_{\text{local}} + t_{\text{base}}))$.*

We derive the running time of the Algorithm 1 by providing an upper bound in terms of recurrence relation as in Section 5.4.1, and solving the recurrence relation in Section 5.4.2. We prove Lemma 5.10 in Section 5.4.3.

Throughout this section, we denote $a' = a + o(1)$.

5.4.1 Recurrence Relation

Lemma 5.11. *Suppose Algorithm 1 never encounters the case $h(G) \geq \eta$, then the running time satisfies the following recurrence relation.*

$$T_{k,a}(n) \leq T_{k,a}(\ell + s + k) + T_{k,a}(n - \ell + k) + T_h(nk, n) + T_{\text{split}}(nk, n, k, s) + O(nk), \quad (10)$$

where ℓ, s, k satisfy

$$k < s \leq n^{a'}/2, \quad \ell \geq n^{1-a'}, \quad \ell \leq n/2, \quad \text{and} \quad k < n^{1-a'}, \quad (11)$$

and the base case is $T_{k,a}(n) = T_{\text{base}}(nk, n, k)$ for $n \leq \Lambda$.

Proof. By assumption the input graph $G = (V, E)$ has aboricity k , meaning that $m = nk$. If $n \leq \Lambda$, then we run any deterministic vertex-connectivity algorithm in $T_{\text{base}}(nk, n, k)$ time. Now suppose $n > \Lambda$. Algorithm 1 first computes the vertex expansion $h(G)$ of the graph G in $T_h(nk, n)$ time. Next, we obtain a separation triple (L, S, R) such that $h(L, S, R) \leq 1/(2n^{1-a'})$. By Corollary 4.21, we have

$$\min(|L|, |R|) \geq n^{1-a'} \quad \text{and} \quad |S| \leq n^{a'}/2. \quad (12)$$

Next, we runs SplitVC algorithm to check if there is a pair of vertices $x \in S, y \in S$ such that $\kappa_G(x, y) < k$. This takes $T_{\text{split}}(nk, n, k, s)$ time where $s = |S|$. Without loss of generality, we assume that there is no such pair and so the algorithm continues. In this situation, we have $k < |S| = s$. Furthermore, by Equation (12), $s = |S| \leq n^{a'}/2$. This justifies the first inequalities in Equation (11). Next, we construct left and right subgraphs and sparsify them in $O(m) = O(nk)$ time. We assume WLOG that $|L| \leq |R|$ (otherwise, we can swap L and R in the separation triple). Let $\ell = |L|$. By Equation (12), $\ell = |L| \geq n^{1-a'}$, so we get the second inequality in Equation (11). The third inequality in Equation (11) follows from Corollary 4.21 that $\ell = \min(|L|, |R|) \leq n/2$. The final inequality in Equation (11) follows from $k < n^{a'}/2$, and $a < 0.5$. By Definition 4.1, we have that H_L has $\ell + s + k$ vertices, and H_R has $n - \ell + k$ vertices. Also, the number of new edges is $O(|S|k + k^2) = O(nk)$ for H_L and H_R . We apply Theorem 4.4 for both H_L and H_R , which takes additional $O(nk)$ time. Therefore, the running time for solving two subproblems is additional $T_{k,a}(\ell + s + k) + T_{k,a}(n - \ell + k)$. \square

5.4.2 Solving Recurrence Relation

This section is devoted to solve recurrence relation $T_{k,a}(n)$ in Equation (10). The main result is the following lemma.

Lemma 5.12. *An explicit function in Equation (10) is $T_{k,a}(n) = \tilde{O}(t_{\text{cost}}n^{a+o(1)} + nt_{\text{base}})$.*

Throughout this section, we denote $t_{\text{cost}} = \tilde{O}(n^x)$ for some $x \geq 1$.

Definition 5.13 (Recursion tree). A *recursion tree* for a recurrence relation is a tree that is generated by tracing the function calls recursively. Each node v in the tree contains (1) $\text{size}(v)$, which is the input to the function, and (2) $\text{cost}(v)$, which is the cost at current node excluding the cost for recursions.

Let \mathcal{T} be a recursion tree for the recurrence relation in Equation (10) where each node of size n_i in the tree has cost $O(n_i^x)$. Without loss of generality, we assume the recursion tree \mathcal{T} always has left subproblem of size $\ell + s + k$, and right subproblem of size $n - \ell + k$ (otherwise, we can swap left and right subtrees without affecting total cost).

We give the intuition for solving the recurrence relation Equation (10) using recursion tree. We consider the right child as the subproblem with “true” size, and left child as the subproblem with extraneous nodes in the graph. Hence, the total cost on along the right spine from the root counts the cost without extra nodes. For the extra nodes in the graph when recurse on the left, we can essentially charge the cost on the “true” nodes. The number of extra nodes is sufficiently small, and left-branching can happen at most $O(\log n)$ time. Therefore, the total extra cost can be bounded. We now make the intuition precise.

Definition 5.14. We call the *right-spine* R of the tree \mathcal{T} to be the set of nodes from the root using right branch all the way to the node before leaf in \mathcal{T} . We denote $v_i \in R$ as the node with path length i from the root to v_i . By convention, v_0 is the root.

Definition 5.15. Let $C_{k,a}(n)$ be a function satisfying the following recurrence relation

$$C_{k,a}(n) \leq \sum_{v_i \in R} \text{cost}(v_i) + \sum_{i: v_i \in R} C_{k,a}(n_i), \quad n_i = \ell_i + s_i + k, \quad (13)$$

where the parameters satisfy

$$\sum_{v_i \in R} \ell_i \leq n, \quad \text{and} \quad \ell_i + s_i + k \leq 3n/4 \quad \text{for all } v_i \in R, \quad (14)$$

and,

$$k < s_i \leq n_i^{a'}/2 \quad \text{and} \quad \ell_i \geq n_i^{1-a'}. \quad (15)$$

The base case is $C_{k,a}(n) = T_{\text{base}}(nk, n, k)$ for $n \leq \Lambda$.

Remark 5.16. In essence, the recursion tree for $C_{k,a}(n)$ can be obtained by contracting right spine of the recursion tree from $T_{k,a}(n)$ into a single node. The recursion continues for each left subtree of each node in the right spine R .

Lemma 5.17. $T_{k,a}(n) = O(C_{k,a}(n))$.

Proof. If $n \leq \Lambda$, then both functions coincide by definition. We now focus on $n > \Lambda$. We show that the function $C(n)$ can be obtained by rearranging the summation of the cost of all nodes in the recursion tree \mathcal{T} . The term $\sum_{v_i \in R} \text{cost}(v_i)$ corresponds to the summation over all cost of nodes in the right spine R . Now, for each node $v_i \in R$, let \mathcal{T}_i be the corresponding left-subtree of v_i in the recursion tree \mathcal{T} . The size of v_i is $\ell_i + s_i + k$ where ℓ_i and s_i correspond to the terms ℓ and s in Equation (11) for the left child of any node in the recursion tree \mathcal{T} . Therefore, the total cost is $\sum_{v_i \in R} \text{cost}(v_i)$ plus the cost of each remaining subtree \mathcal{T}_i , which we can compute recursively. Note that by Equation (11), we have $k < s_i \leq n_i^{a'}/2$ and $\ell_i \geq n_i^{1-a'}$.

It remains to show that $\sum_{v_i \in R} \ell_i \leq n$ and that $\ell_i + s_i + k \leq 3n/4$ for all $v_i \in R$. We first show that $\sum_{v_i \in R} \ell_i \leq n$. The size of the leaf node in the right spine R is $n - \sum_{v_i \in R} \ell_i$, which is ≥ 0 . Therefore, $n \geq \sum_{v_i \in R} \ell_i$. Next, we show that $\ell_i + s_i + k \leq 3n/4$ for all $v_i \in R$. Let n_i be the size at node v_i . Since recursion does not increase the size of node, we have $n_i \leq n$. By Equation (11), we have $\ell_i \leq n_i/2, s_i \leq n_i^{a'}/2, k < n_i^{a'}/2$ where ℓ_i, s_i corresponds to the parameters at node $v_i \in R$. Therefore, $\ell_i + s_i + k \leq n_i/2 + n_i^{a'}/2 + n_i^{a'}/2 \leq n/2 + n^{a'}/2 + n^{a'}/2 \leq 3n/4$ for any $n \geq 8$ and any $a \in (0, 1/2)$. \square

Claim 5.18. *The cost of all nodes in the right spine R , $\sum_{v_i \in R} \text{cost}(v_i)$, is $O(n^{x+a'} + t_{\text{base}})$.*

Proof. Each node in R has size at most n , which means that the cost is at most $O(n^x)$ per node. We show that number of nodes in the right-spine R is $O(n^{a'})$, and this implies $O(n^{x+a'})$ term in the total cost. By design, \mathcal{T} always has right subproblem of size $n - \ell + k \leq n - n^{1-a'} + k \leq n - n^{1-a'} + n^{a'}/2 \leq n - n^{1-a'}/2$. The second inequality follows from Equation (11) where $k < s \leq n^{a'}/2$, so $k < n^{a'}/2$. Therefore, the function $L(n) \leq L(\lceil n - n^{1-a'}/2 \rceil) + 1, L(1) = 1$ is an upperbound of the number of nodes in the right-spine R . It is easy to see that $L(n) = O(n^{a'})$. Finally, the term t_{base} follows from the base case of the recurrence where $n \leq \Lambda$. Therefore, the claim follows. \square

We now solve the function $C_{k,a}(n)$ for Equation (13). Let \mathcal{T}' be the recursion tree for $C_{k,a}(n)$. Let $\text{child}(v)$ be the set of children of node v in \mathcal{T}' . Let $\text{level}(i)$ be the set of nodes with distance i from root in \mathcal{T}' . For each node $v \in \mathcal{T}'$ except the root, we denote the size of v as $\text{size}(v) = n_v = \ell_v + s_v + k$ according to Equation (13).

We make useful observation about the recursion tree \mathcal{T}' .

Observation 5.19. *For any non-root internal node v in the recursion tree \mathcal{T}' ,*

$$k < s_v, \tag{16}$$

$$(1 + 2s_v/\ell_v) \leq (1 + 2/n^{\epsilon(1-2a')}), \tag{17}$$

$$\sum_{u \in \text{child}(v)} \ell_u \leq n_v, \tag{18}$$

$$s_v < \ell_v. \tag{19}$$

Proof. The results follow from Definition 5.15 and Equation (14). We now show that $(1 + 2/n^{\epsilon(1-2a')}) \geq (1 + 2s_v/\ell_v)$ for any internal node v . It is enough to show that $\ell_v/s_v \geq n^{\epsilon(1-2a')}$. Since v is an internal node, $n_v \geq \Lambda \geq n^\epsilon$. By Equation (15), $\ell_v \geq n_v^{1-a'}$ and $s_v \leq n_v^{a'}$. Hence, $\ell_v/s_v \geq n_v^{1-2a'} \geq n^{\epsilon(1-2a')}$. Finally, $s_v < \ell_v$ since $a \in (0, 1/2)$, and $s_v \leq n_v^{a'}/2$, and $\ell_v \geq n^{1-a'}$ by Equation (15). \square

Claim 5.20. *For each level in the recursion tree \mathcal{T}' , the total size of internal nodes is most $2n$.*

Proof. First, we show that the recursion tree \mathcal{T}' has depth at most $c \ln n$ for some constant c . This follows from Equation (14) where each subproblem size is at most $3/4$ factor of the current size.

Let $\text{child}^*(v)$ be the set of non-leaf children of node v in \mathcal{T}' . Let $\text{level}^*(i)$ be the set of non-leaf nodes with distance i from root in \mathcal{T}' .

We claim that the total size of internal nodes at level i , $\sum_{u \in \text{level}^*(i)} n_u$, is at most $n(1 + 2/n^{\epsilon(1-2a')})^i$. We prove the claim by induction on number of level. Base case is at level $i = 1$. We have

$$\begin{aligned} \sum_{u \in \text{level}^*(1)} n_u &= \sum_{v \in \text{child}^*(\text{root})} n_v \\ &= \sum_{v \in \text{child}^*(\text{root})} \ell_v + s_v + k \\ &\stackrel{(16)}{\leq} \sum_{v \in \text{child}^*(\text{root})} \ell_v (1 + 2s_v/\ell_v) \\ &\stackrel{(17)}{=} (1 + 2/n^{\epsilon(1-2a')}) \sum_{v \in \text{child}^*(\text{root})} \ell_v \\ &\stackrel{(18)}{\leq} (1 + 2/n^{\epsilon(1-2a')})n. \end{aligned}$$

For inductive hypothesis, we assume that

$$\sum_{u \in \text{level}^*(i)} n_u \leq n(1 + 2/n^{\epsilon(1-2a')})^i, \text{ for } i \geq 1 \quad (20)$$

We now prove as inductive step that $\sum_{u \in \text{level}^*(i+1)} n_u \leq n(1 + 2/n^{\epsilon(1-2a')})^{i+1}$ (as convention, we define the sum over an empty set as zero). This follows from Observation 5.19, and the followings.

$$\begin{aligned} \sum_{u \in \text{level}^*(i+1)} n_u &= \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} (\ell_v + s_v + k) \\ &\stackrel{(16)}{\leq} \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} (\ell_v + 2s_v) \\ &= \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} \ell_v (1 + 2s_v/\ell_v) \\ &\stackrel{(17)}{\leq} (1 + 2/n^{\epsilon(1-2a')}) \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} \ell_v \\ &\stackrel{(18)}{\leq} (1 + 2/n^{\epsilon(1-2a')}) \sum_{u \in \text{level}^*(i)} n_u \\ &\stackrel{(20)}{\leq} (1 + 2/n^{\epsilon(1-2a')}) n(1 + 2/n^{\epsilon(1-2a')})^i \\ &= n(1 + 2/n^{\epsilon(1-2a')})^{i+1} \end{aligned}$$

Therefore, $\sum_{u \in \text{level}^*(i)} n_u \leq n(1 + 2/n^{\epsilon(1-2a')})^i$, which is $\leq 2n$ for sufficiently large n and $i \leq c \log n$. □

Lemma 5.21. *For each level i in the recursion tree \mathcal{T}' , the total size $\sum_{u \in \text{level}(i)} n_u$ is $O(n)$.*

Proof. Let $\text{child}^*(v)$ be the set of non-leaf children of node v in \mathcal{T}' . Also, let $\text{child}^\dagger(v)$ be the set of leaf children of node v in \mathcal{T}' . Note that $\text{child}(v) = \text{child}^*(v) \cup \text{child}^\dagger(v)$. Let $\text{level}^*(i)$ be the set of internal nodes at level i in \mathcal{T}' . Also, Let $\text{level}^\dagger(i)$ be the set of leaf nodes at level i in \mathcal{T}' . Note that $\text{level}(i) = \text{level}^*(i) \cup \text{level}^\dagger(i)$.

We first show that

$$\sum_{u \in \text{level}^\dagger(i+1)} n_u \leq 6n \quad (21)$$

by the followings.

$$\begin{aligned}
\sum_{u \in \text{level}^\dagger(i+1)} n_u &= \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} n_u \\
&= \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} (\ell_v + s_v + k) \\
&\stackrel{(16)}{\leq} \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} (\ell_v + 2s_v) \\
&\stackrel{(19)}{\leq} \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}^*(u)} 3\ell_v \\
&\leq \sum_{u \in \text{level}^*(i)} \sum_{v \in \text{child}(u)} 3\ell_v \\
&\stackrel{(18)}{\leq} 3 \sum_{u \in \text{level}^*(i)} n_u \\
&\leq 3(2n) = 6n \qquad \text{by Claim 5.20.}
\end{aligned}$$

By Claim 5.20, and Equation (21), we have the followings.

$$\begin{aligned}
\sum_{u \in \text{level}(i+1)} n_u &= \sum_{u \in \text{level}^\dagger(i+1)} n_u + \sum_{u \in \text{level}^*(i+1)} n_u \\
&\leq 6n + 2n = O(n).
\end{aligned}$$

Therefore, the result follows. \square

Corollary 5.22. *The number of nodes in the recursion tree \mathcal{T}' is $\tilde{O}(n)$.*

Proof. By Lemma 5.21, each level has total size $O(n)$, and there are $O(\log n)$ levels. Thus, total size is $O(n \log n)$. Each node has at least a unit size. Therefore, number of nodes is $O(n \log n)$. \square

Corollary 5.23. *The number of leaves in the recursion tree \mathcal{T} is $\tilde{O}(n)$.*

We are now ready to prove Lemma 5.12.

Proof of Lemma 5.12. By Lemma 5.17, $T_{k,a}(n) = O(C_{k,a}(n))$, so it is enough to bound the cost

for $C_{k,a}(n)$. Denote the recursion tree \mathcal{T}' for the function relation $C_{k,a}(n)$. We have

$$\begin{aligned}
C_{k,a}(n) &= \sum_{i=0}^{O(\log n)} \sum_{u \in \text{level}(i)} \text{cost}(v) && O(\log n) \text{ depth by Equation (14).} \\
&\leq \sum_{i=0}^{O(\log n)} \left(\sum_{u \in \text{level}(i)} O(n_u^{x+a'}) + |\text{level}(i)| t_{\text{base}} \right) && \text{by Claim 5.18.} \\
&\leq \sum_{i=0}^{O(\log n)} \left(\sum_{u \in \text{level}(i)} n_u^{x+a'} + |\mathcal{T}'| t_{\text{base}} \right) && |\mathcal{T}'| \text{ is the number of nodes in the tree.} \\
&= \tilde{O}(n^{x+a'} + n t_{\text{base}}) && \text{by Lemma 5.21 and corollary 5.22.} \\
&= \tilde{O}(t_{\text{cost}} n^{a+o(1)} + t_{\text{base}} n) && t_{\text{cost}} = n^x, \text{ and } a' = a + o(1).
\end{aligned}$$

Therefore, the result follows. \square

5.4.3 Proof of Lemma 5.10

Let $T'_{k,a}(n)$ be the running time of Algorithm 1. By Lemma 5.12, $T_{k,a}(n) = \tilde{O}(t_{\text{cost}} n^{a+o(1)} + t_{\text{base}} n)$. Hence, it is enough to show that

$$T'_{k,a}(n) \leq \tilde{O}(T_{k,a}(n) + t_{\text{local}} n).$$

Let \mathcal{T} be a recursion tree for the Algorithm 1. Suppose there is a leaf-node u that is not the base-case. This means $h(G) \geq \eta$, and we run LocalVC on every node in G , and return the answer. We can overestimate this cost by extending node u to have two children v, w of size $\ell_v + s_v + k$, and $n_u - \ell_v + k$. The total size is then $n_u + s_v + 2k$. By design, LocalVC will be run at nodes v and w instead of node u . Hence, the running time due to LocalVC strictly increases. The recursion continues which also increases the total cost. By repeat this process, we will end up with the recursion where all leaf nodes are base-case. Therefore, we have the upperbound in terms of $T_{k,a}(n)$ with extra-cost due LocalVC. The extra-cost due to LocalVC is at most the total size of the leaf nodes in \mathcal{T} . By Corollary 5.23, the total size of leaf nodes is $\tilde{O}(n)$. Hence, the number of LocalVC calls is at most $\tilde{O}(n)$.

5.5 Proof of Theorem 2.4

We analyze Algorithm 1. First, the correctness follows from Lemma 5.4. It remains to derive the final running time. The first term $O(m)$ follows from Theorem 4.4 as we first sparsify the original graph in $O(m)$ time. Since G (and later subgraphs in the recursions) has aboricity k , $m \leq nk$, and from now we treat m as nk . We now derive the latter term.

We now instantiate the running time for the corresponding algorithms in Definition 5.8.

Corollary 5.24. *We have the following running times for subroutines in Algorithm 1.*

- *There is an algorithm for the base-case that runs in time $O(m(n + k^3))$.*
- *There is an algorithm for approximate vertex-expansion $h(G)$ that runs in time $\tilde{O}(m^{1.6})$.*
- *There is a LocalVC algorithm that runs in $\tilde{O}(\min(\nu^{1.5} k, \nu k^k))$ time.*

- There is a SplitVC algorithm that runs in $O(mk(|S| + k^2))$ time.

Proof. We use current best-known running time for the base case [Gab06] (with small k) which runs in time $O(mn + mk^3)$. By Theorem 6.1, we can compute approximate vertex-expansion in time $\tilde{O}(m^{1.6})$. By Theorem 5.2, LocalVC runs in time $\tilde{O}(\min(\nu^{1.5}k, \nu k^k))$. By Theorem B.1, SplitVC runs in time $O(mk(|S| + k^2))$. \square

Consequently, by Corollary 5.24, we instantiate the running time for each term in Definition 5.9 where we putting together subroutines in Definition 5.8 into Algorithm 1.

Corollary 5.25. *We have the running time for t_{cost} , t_{local} , and t_{base} as follows. Assuming that $k > n^\epsilon$ where we can select sufficiently small $\epsilon > 0$.*

- $t_{\text{cost}} = \tilde{O}(n^\theta k^\theta + n^{1+a+o(1)}k^2 + nk^4)$.
- $t_{\text{local}} = \tilde{O}(\min(n^{1.5-1.5a}k^4, n^{1-a}k^{2+k}))$.
- $t_{\text{base}} = O(k^{1+4/a} + k^{4+2/a})$.

Proof. The results follow from simple algebraic calculation from Definition 5.9, and Corollary 5.24. For LocalVC, we use $\nu = O(k^2n^{1-a})$. \square

Corollary 5.26. *When $\theta > 1.5$, the running time $\tilde{T}_{a,k}(n)$ for Algorithm 1 can be bounded by*

$$\tilde{T}_{a,k}(n) = \tilde{O}(n^{\theta+a+o(1)} + n^{2-a}k^{2+k}).$$

Proof. By Lemma 5.10, we have $\tilde{T}_{a,k}(n) = \tilde{O}(t_{\text{cost}}n^{a+o(1)} + n(t_{\text{local}} + t_{\text{base}}))$. By Corollary 5.25 where $k = O(1)$, we have $t_{\text{cost}} = \tilde{O}(n^\theta)$ (since $a < 0.5$), $t_{\text{local}} = \tilde{O}(n^{1-a})$, and $t_{\text{base}} = O(\Lambda^2) = O(n^{2\epsilon})$. \square

Setting $a = 0.25$ then gives the first term of the running time as stated in Theorem 2.4. For the larger k case, we instead use $t_{\text{local}} = \tilde{O}(n^{1.5-1.5a}k^4)$.

Corollary 5.27. *Let $a' = a + o(1)$. The running time $\tilde{T}_{a,k}(n)$ for Algorithm 1 can be bounded by*

$$\tilde{T}_{a,k}(n) = \tilde{O}\left(n^{a'}n^\theta k^\theta + n^{2.5-1.5a}k^4 + nk^{4/a+1}\right)$$

Proof. By Lemma 5.10, we have $\tilde{T}_{a,k}(n) = \tilde{O}(t_{\text{cost}}n^{a+o(1)} + n(t_{\text{local}} + t_{\text{base}}))$. By Corollary 5.25, we obtain the following.

$$\begin{aligned} \tilde{T}_{a,k}(n) &\leq \widehat{O}\left(n^{a'}\left(n^\theta k^\theta + n^{1+a'}k^2 + nk^4\right) + n^{2.5-1.5a}k^4 + n\left(k^{4/a+1} + k^{5+2/a}\right)\right) \\ &\leq \widehat{O}\left(n^{a'}n^\theta k^\theta + n^{2.5-1.5a}k^4 + nk^{4/a+1}\right). \end{aligned}$$

The last equality follows by the assumption of $k < n^{1/8}$ (precondition for Theorem 2.4), and $a < 0.5$. \square

Here the optimal choice of a is

$$a = \frac{(2.5 - \theta) + (4 - \theta) \log_n k}{2.5}.$$

By the assumption on k , we have that $a < 0.5$, and thus a satisfies the precondition for Algorithm 1. Substituting this value into Corollary 5.27 gives the final term of running time for Algorithm 1, which is $\widehat{O}(n^{1+0.6\theta}k^{1.6+0.6\theta})$. Therefore, we conclude the proof of Theorem 2.4.

6 Low-Vertex-Expansion Cuts from Balanced Low-conductance Cuts

In this section, we show how an approximate balanced cut algorithm can be used to give an algorithm that approximates the minimum vertex expansion.

Theorem 2.6. *Given any $(f(\phi), c)$ -approximate balanced-cut routine APPROXBALCUT such that $f(\phi) \leq \phi^\xi n^{o(1)}$ for some absolute constant $0 < \xi \leq 1$, we can compute an $n^{o(1)}$ -approximation to the minimum vertex expansion on a graph with n vertices and m edges by invoking APPROXBALCUT a total of $O(c \log n)$ times, each time on a graph with n vertices and maximum degree $O(c \log n)$, plus a further deterministic overhead of $\tilde{O}(cm^{1.5})$.*

Theorem 6.1. *There is a deterministic algorithm that, given a graph G and a parameter η , runs in $\tilde{O}(m^{1.6})$ and either*

- certifies that $h(G) \geq \eta$, or
- returns (L, S, R) where $h(L, S, R) \leq \eta n^{o(1)}$.

This algorithm is based on the *cut-matching game* introduced by Khandekar, Rao, and Vazirani [KRV09].

In the original paper [KRV09], they show a specific randomized approach, based on random projection, for implementing the framework very fast. Later, it is shown in [KKOV07] that such random projection is not inherent: given any algorithm for finding a sparsest cut, then the framework can be implemented. In particular, this framework can be implemented deterministically. However, in [KKOV07], they use *exact* algorithm for computing sparsest cut which is NP-hard. Below, we will show that the idea [KKOV07] still works even if when we use only approximate algorithms for finding sparse cuts.

Below, we first prove two main steps in the cut matching game in our context. In Section 6.1, we show that how to lower bound the vertex expansion by *embedding* an expander. In Section 6.2, we show how to find low vertex expansion cut using a single commodity flow. Then, Section 6.4, we describe the cut-matching game variant by [KKOV07] with a relaxation that we can use approximation algorithms. Then, we show how everything fits together.

The main technique in this section is the *cut matching game* by Khandekar, Rao, and Vazirani [KRV09]. This is a very flexible framework that can be used to certify various notion of expansion of graphs. The framework was used for approximating the sparsity $\sigma(G)$ of a graph G where $\sigma(G) = \min_S \frac{|E(S, V-S)|}{\min\{|S|, |V-S|\}}$ in [KRV09] and for approximating the conductance $\Phi(G)$ of G in [SW19]. For our purpose, it is not hard to adjust the framework so that it works for vertex expansion $h(G)$ of the graph G .

Unfortunately, one of the two main components of the framework in [KRV09] is randomized. More precisely, their framework requires computing a cut C with some specific property, and they give a very fast randomized algorithm for computing such C based on a random-projection technique. It is not clear how to derandomize the algorithm for computing such cut. Fortunately, in a technical report by Khandekar, Khot, Orecchia, Vishnoi [KKOV07], they show how to adjust the analysis of [KRV09] so that it works when C is the most-balanced low-conductance cut. However, this is an NP-hard problem.

We observe that we do not need an exact algorithm for computing C . For this, we require an additional property of our approximate balanced cut routine, that it returns a set S with $|S| \leq n/2$ such that $\Phi(G[V - S]) \geq \alpha$, or that the graph with S removed is an expander. It turns out that there is a black box method [NS17, Wul17] to obtain this guarantee from an approximate balanced cut algorithm. Formally, we obtain from this black-box, $T_{cut} = \tilde{O}(m^{1.5})$ and $\alpha = 1/n^{o(1)}$, which in turn gives the overall running time.

6.1 Lower Bounding Vertex Expansion via Expander Embedding

We first define some basic notions about *flow*. Although we are working with undirected vertex-capacitated graphs, we will define the problems also on directed graphs and also edge capacitated graphs. Let G be a directed graph $G = (V, E)$ and $s, t \in V$. An s - t flow $f \in \mathbb{R}_{\geq 0}^E$ is such that, for any $v \in V - \{s, t\}$, the amount of flow into v equals the amount of flow out of v , i.e., $\sum_{(u,v) \in E} f(u, v) = \sum_{(v,u) \in E} f(v, u)$. Let $f(v) = \sum_{(u,v) \in E} f(u, v)$ be the *amount of flow at v* . The *value* $|f|$ of f is $\sum_{(s,v) \in E} f(s, v) - \sum_{(v,s) \in E} f(v, s)$.

Let $c \in (\mathbb{R}_{>0} \cup \{\infty\})^V$ be vertex capacities. f is *vertex-capacity-feasible* if $f(v) \leq c(v)$ for all $v \in V$. If G is undirected, one way to define an s - t flow is by treating G as a directed graph where there are two directed edge (u, v) and (v, u) for each undirected edge $\{u, v\}$. We will assume that a flow only goes through an edge in one direction, i.e., for each edge $\{u, v\} \in E$, either $f(u, v) = 0$ or $f(v, u) = 0$.

For $1 \leq i \leq k$, let f_i be an s_i - t_i flow with value d_i . We call $\mathcal{F} = \{f_1, \dots, f_k\}$ a *multi-commodity flow*. We call the k tuples $(s_1, t_1, d_1), \dots, (s_k, t_k, d_k)$ the *demands* of \mathcal{F} . We say that \mathcal{F} is *edge-capacity-feasible* if $\sum_i f_i(e) \leq c(e)$ for each $e \in E$, and is *vertex-capacity-feasible* if $\sum_i f_i(v) \leq c(v)$ for all $v \in V$. We usually just write *feasible*. Let $W = (V, E, w)$ be a weighted graph. If a multicommodity flow f has the demands $\{(u, v, w(e)) \mid e = (u, v) \in W\}$, then we say that f *respects* W .

Definition 6.2 (Embedding with Vertex Congestion). Let $G = (V, E)$ and $W = (V, E_W)$ be two graphs with the same set of vertices. We say that W can be embedded into G with vertex congestion c iff there exists a feasible multicommodity flow f in G respecting W when each node in G has capacity c .

Lemma 6.3. *Suppose W has sparsity $\sigma(W) \geq \phi$, and W can be embedded into G with vertex congestion c , then $h(G) \geq \phi/2c$.*

Proof. Consider any separation triple (L, S, R) where $|S| \leq |L|, |R|$, otherwise $h(L, S, R) \geq 1/2 \geq \phi/2c$. Assume w.l.o.g. that $|L| \leq |R|$. In particular, $|L| \leq |\bar{L}|$. Then we have $E_W(L, \bar{L}) \geq \phi|L|$. As W can be embedded into G with vertex congestion c , $|N_G(L)| = |S| \geq \phi|L|/c$. So we conclude $h(L, S, R) = \frac{|S|}{\min\{|L|, |R|\} + |S|} \geq \frac{|S|}{(c/\phi) \cdot |S| + |S|} \geq \phi/2c$. \square

6.2 Finding Low Vertex Expansion Cut via Single Commodity Flow

We prove the following in this section:

Lemma 6.4. *Let $G = (V, E)$ be a n -vertex m -edge graph. Let $A, B \subset V$ be two disjoint vertex sets. Let c be a congestion parameter. There is a deterministic algorithm that runs in $\tilde{O}(m\sqrt{n})$ time, and either*

- return an embedding M into G with vertex congestion c , where M is a matching of size $\min\{|A|, |B|\}$ between vertices of A and B , or
- return a separation triple (L, S, R) where $h(L, S, R) < 1/c$.

To prove the above, we define the following flow problem. Let G' be a vertex-capacitated graph defined from G as follows. We create a source vertex s and a sink vertex t . For each vertex $v \in A$, we add a dummy vertex v' and an edge (s, v') and (v', v) . Let A' be the set of such dummy vertices incident to s . For each vertex $v \in B$, we add a dummy vertex v' and an edge (t, v') and (v', v) . Let B' be the set of such dummy vertices incident to t . Each vertex in V has capacity v . Each vertex in $A' \cup B'$ has capacity 1. The vertices s and t have capacity ∞ .

The algorithm just computes a max flow in G' using an deterministic $\tilde{O}(m\sqrt{n})$ -time algorithm by the subset of the authors [NSY19a] (or a more well-known one with running time $\tilde{O}(m^{1.5})$ by Goldberg and Rao [GR98]). If the size of max flow value is $\min\{|A|, |B|\}$, then by definition, we can obtain an embedding M into G as stated in Lemma 6.4. Now, we need to show that if the max flow value is less, then we obtain (L, S, R) where $h(L, S, R) < 1/c$.

Lemma 6.5. *Let (L', S', R') be the minimum vertex cut in G' where $s \in L'$ and $t \in R'$. If the cut value of (L', S', R') is less than $\min\{|A|, |B|\}$, then $(L, S, R) = (L' \cap V, S' \cap V, R' \cap V)$ is a vertex-cut in G where $h(L, S, R) < 1/c$.*

Proof. Observe that the cut value of (L', S', R') is

$$|S' \cap A'| + |S' \cap B'| + c|S' - A' \cup B'|$$

which is less than $|A|$ by assumption. Note that $(S' - A' \cup B') = (S' \cap V) = S$.

Observe that $|S' \cap A'| \geq |A \cap R|$. This is because for each $v \in A \cap R$, we must include the corresponding dummy node into v' into S' , otherwise s can reach $R \subset R'$ and hence reach t , and this would mean that (L', S', R') is not a s - t vertex cut. So we have

$$|A| > |S' \cap A'| + |S' \cap B'| + c|S' - A' \cup B'| \geq |A \cap R| + c|S|.$$

Hence,

$$|A \cap (L \cup S)| = |A| - |A \cap R| > c|S|.$$

So we have $|L| + |S| > c|S|$. Symmetrically, we also conclude that $|R| + |S| > c|S|$. In particular, $L \neq \emptyset$ and $R \neq \emptyset$. As (L, S, R) is obtained from (L', S', R') by just removing $A' \cup B' \cup \{s, t\}$ from the graph, there must be no edge between L and R as there are no edges between L' and R' . That is, (L, S, R) is indeed a separation triple. Therefore, we conclude that $h(L, S, R) = |S|/(\min\{|L|, |R|\} + |S|) < 1/c$. \square

6.3 Cut with expander complement

In this section, we show the following:

Theorem 6.6. *Given an $(f(\phi), \beta)$ -approximate balanced cut algorithm \mathcal{A} such that $f(\phi) \leq \phi^\xi \text{polylog}(n)$ for some absolute constant $0 < \xi \leq 1$ and $\beta \leq O(\log^4 n)$ where \mathcal{A} works on graph instances with maximum degree $O(\log n)$, we can obtain an algorithm that takes an undirected n -vertex m -edge graph G with maximum degree $O(\log n)$, calls \mathcal{A} for $n^{o(1)}$ many times with parameter $\phi \geq 1/n^{o(1)}$ and uses $\tilde{O}(m)$ overhead, then either*

- certifies that $\Phi(G) \geq \gamma$, or
- outputs a cut S where $\Phi_G(S) \leq 1/\log^2 n$ and $\text{vol}(S) = \Omega(m/\log n)$,
- outputs a cut S where $\Phi_G(S) \leq 1/\log^2 n$, $\text{vol}(S) = O(m/\log n)$, and $\Phi(G[V - S]) \geq \gamma$,

where $\gamma = 1/n^{o(1)}$.

We follow the techniques from [NS17, Wu17], which show how to use an (approximate) most-balanced low-conductance algorithm to obtain a cut with expander complement. Here, we state their results.

Lemma 6.7 ([NS17, Wu17]). *Let f be a function such that $f(\phi) \geq \phi$ for all $\phi \in [0, 1]$. Let $c_{\text{size}} = c_{\text{size}}(n)$ be some number depending on n . Suppose that there is an algorithm \mathcal{A} that, given a n -vertex m -edge graph G with maximum degree Δ and a parameter ϕ , either*

- certifies that $\Phi_G \geq \phi$, or
- returns a $(\phi, c_{\text{size}}(n))$ -most-balanced $f(\phi, n)$ -conductance cut.

Then, for any $k \geq 1$, there is an algorithm that, given a n -vertex graph G with maximum degree Δ and a parameter ϕ , calls \mathcal{A} for $O(m^{1/k}/c_{\text{size}})$ many times plus $\tilde{O}(m)$ overhead and then either

- certifies that $\Phi_G \geq \phi$, or
- returns a cut S where $\Phi_G(S) \leq f^k(\phi)$ where $\text{vol}(S) \geq \Omega(m)$, or
- returns a cut S where $\Phi_G(S) \leq f^k(\phi)$ where $\Phi(G[V - S]) \geq \phi$,

where $f^1(\phi) = f(\phi, n)$ and $f^k(\phi) = f^{k-1}(f(\phi))$.

Proof of Theorem 6.6. The given approximate balanced cut routine either (1) certifies that $\Phi_G \geq \phi$, or (2) returns a $(\phi, c_{\text{size}}(n))$ -most-balanced $f(\phi, n)$ -conductance cut, where $c_{\text{size}}(n) = O(\log^4 n)$ and $f(\phi, n) \leq \phi^\xi \text{polylog}(n)$.

Observe that $f^k(\phi) = \phi^{\xi^k} (\text{polylog}(n))^k$. In order to have $f^k(\phi) \leq 1/\log^2 n$, we can set

$$\phi = \left(\frac{1}{(\text{polylog}(n))^k} \right)^{\xi^{-k}}.$$

If we set $k = c \cdot \log \log n$ for small enough constant c , then we have $\xi^{-k} = \log^\epsilon(n)$ for a very small constant $\epsilon > 0$. Therefore, $\phi = 1/n^{o(1)}$. So Lemma 6.7 gives us the routine that we need for Theorem 6.6 where the number of calls to \mathcal{A} is $O(m^{1/k}/c_{\text{size}}) = n^{o(1)}$. \square

6.4 Cut-matching game via approximate low-conductance cut

Given an n -vertex graph G , the cut-matching game from [KKOV07] is a framework which proceeds in rounds. There will be $O(\log n)$ rounds. Let $W_0 = \emptyset$. Let c be a congestion parameter. Let \mathcal{A} be the algorithm from Theorem 6.6. At round i , we maintain the invariant that W_{i-1} is already embedded into G with congestion $c \times (i-1)$ and $\text{vol}(W_{i-1}) = \Omega(n(i-1))$. We run \mathcal{A} on W_{i-1} which can result in three cases.

First, if \mathcal{A} certify that $\Phi(W_{i-1}) \geq \gamma$. Hence, $\sigma(W_{i-1}) \geq \gamma$ and we have that $h(G) \geq \gamma/(2c(i-1)) = \Omega(\gamma/(c \log n))$ by Lemma 6.3, and so we terminate.

Second, if \mathcal{A} returns a cut S where $\Phi(S) \leq 1/\log^2 n$ and $\text{vol}(S) = \Omega(\text{vol}(W_{i-1}))$, then we set $A = S$ and $B = V - S$ and invoke Lemma 6.4. If we obtain (L, S, R) where $h(L, S, R) < 1/c$, we terminate. Otherwise, we obtain a matching M_i of size $|M_i| \geq \min\{|S|, |V - S|\} \geq \Omega(\text{vol}(W_{i-1})/(i-1)) = \Omega(n)$. We set $W_i \leftarrow W_{i-1} \cup M_i$ and hence $\text{vol}(W_i) = \Omega(ni)$ and W_i is embeddable into G with congestion $c \times i$.

Third, if \mathcal{A} returns a cut S where $\Phi(S) \leq 1/\log^2 n$ and $\Phi(G[V - S]) \geq \gamma$, then we set $A = S$ and $B = V - S$ and invoke Lemma 6.4. If we obtain (L, S, R) where $h(L, S, R) < 1/c$, we terminate. Otherwise, we obtain a matching M_i embeddable to G . We know $|M_i| = |S|$ because $|S| \leq \text{vol}(S) \leq \text{vol}(V - S)/\Theta(\log n) \leq |V - S|$ by Theorem 6.6. We set $W_i \leftarrow W_{i-1} \cup M_i$. We claim that $\sigma(W_i) \geq \Omega(\gamma)$. As W_i is embeddable into G with congestion $c \times i$, so $h(G) \geq \gamma/(2ci) = \Omega(\gamma/(c \log n))$ by Lemma 6.3, and so we terminate.

In [KKOV07], the following is proven:

Lemma 6.8 (Section 4 of [KKOV07]). *The second case can occur at most $O(\log n)$ times.*

Therefore, then indeed there at $O(\log n)$ rounds. This is because the algorithm will terminate whenever the first or third case occur.

Lemma 6.9. *In the third case, if we obtain a matching M_i , then $\sigma(W_i) \geq \Omega(\gamma)$.*

Proof. Let S be the cut that \mathcal{A} returns in the third case. Consider any cut $C \subset V$ where $|C| \leq |V - C|$. If $|C \cap S| \geq 2|C - S|$ and so $|C \cap S| \geq 2|C|/3$, then there is

$$\begin{aligned} |E_{M_i}(C \cap S, V - S)| &\geq |E_{M_i}(C \cap S, V - C \cap S)| - |E_{M_i}(C \cap S, C - S)| \\ &\geq |C \cap S| - |C - S| \\ &\geq |C \cap S|/2 \\ &\geq |C|/3. \end{aligned}$$

Next, if $|C \cap S| \leq 2|C - S|$ and so $|C - S| \geq |C|/3$ then

$$\begin{aligned} |E_{W_{i-1}}(C - S, V - S)| &\geq \gamma|C - S| \\ &\geq \gamma|C|/3. \end{aligned}$$

That is, $E_{W_i}(C, V - S) \geq \gamma|C|/3$. Hence, $\sigma(W_i) \geq \gamma/3$. □

Observe that the above algorithm just invoke the algorithm from Lemma 6.4 and Theorem 6.6 $O(\log n)$ times. Hence, the total running time is $O(\log n) \times (\tilde{O}(m\sqrt{n}))$ plus the cost of $O(\log n)$ calls to the approximate balanced cut routine. To conclude, whenever the first case occurs or a matching is obtained in the third case, we have $h(G) = \Omega(\gamma/(c \log n))$. Otherwise, we must obtain (L, S, R) where $h(L, S, R) < 1/c$ during some round. By setting $\eta = \Theta(\gamma/(c \log n))$, we conclude the proof of Theorem 2.6.

7 Near-Expander Low-Conductance Cuts on Dense Graphs

The main result in this section is an approximate balanced cut algorithm on dense graphs.

Theorem 2.7. *There is an $(O(\phi^{1/2} \log m), 10)$ -approximate balanced-cut algorithm that runs in deterministic $O(n^\omega)$ time on any multigraph $G = (V, E)$ with n vertices, and any parameter ϕ .*

Although, the algorithm is stated for general parameters, to start with, it is more convenient to think of $\phi, \phi^* = 1/\text{poly log } n$ but $\phi \gg \phi^*$, and $c = \text{poly log } n$. Our goal is to find a $(\phi^2/\text{poly log } m, \tilde{O}(1))$ -balanced ϕ -conductance in $O(n^\omega)$ time. We emphasize that the requirement $\text{vol}(S) \geq \text{vol}(S^*)/c$ is crucial for us. Without this requirement, there is in fact a very simple $O(n^\omega)$ time algorithm that we discuss in Section 3

At the high level, our algorithm is a derandomization of the *PageRank-Nibble* algorithm by Andersen, Chung, and Lang [ACL06] for finding $(\phi^2/\text{poly log } m, O(1))$ -balanced ϕ -conductance cut in $\tilde{O}(m/\phi^2)$ time. However, there are several obstacles we need to overcome. To show how, we need some basics about PageRank and the algorithm of [ACL06]. For any vertex v , the *PageRank vector* $p_v \in \mathbb{R}_{\geq 0}^V$ of vertex v is a vector encoding a distribution over vertices when we perform some variant of random walk starting at v . Roughly speaking, PageRank-Nibble works as follows::

1. Sample a vertex v according to some distribution. Compute an approximation of p_v .
2. Find a ϕ -conductance cut C by which is a *sweep cut* w.r.t. to p_v , if exists. (We will define sweep cuts later).
3. Then, set $G \leftarrow G[V - C]$ if C is found and repeat.
4. The next PageRank vector p_v is w.r.t. the new graph.

The running time obtained by Andersen et al. [ACL06] critically relies on the vertex v being sampled randomly. If v is chosen in some arbitrary order, the running time can be $\Omega(mn)$: we may need to check $\Omega(n)$ vertices, spend $\Omega(m)$ time to compute (an approximation of) p_v for each v , and still could not find any ϕ -conductance cut.

Our first key idea is to instead compute the PageRank vector p_v w.r.t. to the input graph G for all $v \in V$ *simultaneously* by inverting the PageRank matrix defined from G . That is, instead of sampling, we consider all starting points v .

The more subtle and challenging obstacle is to compute sweep cuts. A sweep cut w.r.t. p_v is a cut of the form $V_{\geq t}^{p_v}$ where $V_{\geq t}^{p_v} = \{u \in V \mid p_v(u) \geq t\}$. In [ACL06], the cost for computing sweep cut can be charged to the cost for computing an approximation of p_v . As our approach for computing p_v changes, we need to account the cost ourselves. We can trivially check if there is a sweep cut $V_{\geq t}^{p_v}$ with conductance at most ϕ in $O(m)$. To do this, we compute $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$ and $\text{vol}(V_{\geq t}^{p_v})$ of *all* t in $O(m)$, by sorting vertices according their values in p_v and “sweeping” through vertices in the sorted order. Unfortunately, spending $O(m)$ time for each vertex v would give $O(mn)$ time algorithm which is again too slow.⁶ To the best of our knowledge, there is no deterministic data structure even for checking whether $|E(S, V - S)| > 0$ in $o(m)$ time, given a vertex set $S \subset V$. That is, it is not clear how to approximate $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$ in $o(m)$ time even for a fix t .

⁶With randomization, given p_v for all v , we can compute a sweep cut for all v in $\tilde{O}(n^2)$ total time. For example, we can precompute the degrees of vertices in $O(m)$ time. So we can compute $\text{vol}(V_{\geq t}^{p_v})$ of all t in $O(n)$ for each v . Then, we can build a randomized data structure based on linear sketches in $\tilde{O}(m)$ time. So we can approximate $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$ of all t in $O(n)$ for each v .

To overcome this second obstacle, we show that how to obtain a sweep cut without approximating the cut size $|E(V_{\geq t'}^{p_v}, V - V_{\geq t'}^{p_v})|$ for any t' . More precisely, by preprocessing the PageRank vectors p_v of all v in $\tilde{O}(n^2)$, we show how obtain a sweep cut with conductance ϕ , if exists, in time $\text{poly log } m$ instead of $O(m)$. To do this, we exploit the fact the sweep cut is w.r.t. a PageRank vector p_v and not some arbitrary vector. This allows us to do a binary search tree for t where the condition depends solely on the volume $\text{vol}(V_{\geq t}^{p_v})$ and not the cut size $|E(V_{\geq t}^{p_v}, V - V_{\geq t}^{p_v})|$. The details of technique is in Section 7.3. Once all sweep cuts are computed. We follow the analysis of [ACL06, KT19] and obtain $(\phi^2/\text{poly log } m, O(1))$ -balanced ϕ -conductance cut.

7.1 Near-Expander Cuts

For the analysis of this algorithm, it is most convenient to work near-expanders and near-expander cuts.

Definition 7.1 (Nearly Expander). Given $G = (V, E)$ and a set of nodes $A \subseteq V$, we say A is a nearly ϕ -expander in G if

$$\forall S \subseteq A, \text{vol}(S) \leq \text{vol}(A)/2 : |E(S, V \setminus S)| \geq \phi \text{vol}(S).$$

Definition 7.2 (Near-Expander Edge Cut). Given $G = (V, E)$ and parameters ϕ_1, ϕ_2 , a set $S \subseteq V$ with $\text{vol}(S) \leq m$ is a ϕ_2 -near-expander ϕ_1 -conductance cut if it satisfies:

1. $\Phi(S) \leq \phi_1$,
2. Either $\text{vol}(S) \geq m/4$, or $V \setminus S$ is a nearly ϕ_2 -expander in G .

We can then prove the following equivalent form of Theorem 2.7.

Theorem 7.3. *Given a multigraph $G = (V, E)$ and parameter ϕ , there is a deterministic algorithm that runs in $O(n^\omega)$ time and either:*

1. *Outputs a $\Omega(\phi/\log(m))$ -near-expander $O(\sqrt{\phi \log m})$ -conductance cut, or*
2. *Certifies that $\Phi(G) \geq \phi$.*

We use this notion since it is more general and could prove useful in future applications. We can use it to obtain a most balanced low conductance cut (as defined in Definition 2.5) by the lemma below.

Lemma 7.4. *Given G and parameters $\phi_1, \phi_2 < 1$ and $c \geq 4$, if S is a $(\frac{c\phi_2 + \phi_1}{c-1})$ -near-expander ϕ_1 -conductance cut, then S is a (ϕ_2, c) -most-balanced ϕ_1 -conductance cut.*

Proof. If $\text{vol}(S) \geq m/4$, then S must be a $(\phi_2, 4)$ -most-balanced ϕ_1 -conductance cut, since any cut S' with $\text{vol}(S') \leq m$ must satisfy $\text{vol}(S') \leq m \leq 4 \text{vol}(S)$. Since $c \geq 4$, S is also a (ϕ_1, c) -most-balanced ϕ_2 -conductance cut.

From now on, suppose that $\text{vol}(S) < m/4$. Suppose for contradiction that S is not a (ϕ_2, c) -most-balanced ϕ_1 -conductance cut. Then, there exists a set T ($\text{vol}(T) \leq m$) of conductance at most ϕ_2 with

$$\text{vol}(T) > c \text{vol}(S). \tag{22}$$

Our goal is to show that the set $T \setminus S \subseteq V \setminus S$ satisfies

$$|E(T \setminus S, V \setminus (T \setminus S))| < \frac{c\phi_2 + \phi_1}{c-1} \text{vol}(T \setminus S), \quad (23)$$

contradicting the assumption that $V \setminus S$ is a nearly $(\frac{c\phi_2 + \phi_1}{c-1})$ -expander.

We have

$$\text{vol}(T \setminus S) \geq \text{vol}(T) - \text{vol}(S) \stackrel{(22)}{>} \text{vol}(T) - \frac{1}{c} \text{vol}(T) = \frac{c-1}{c} \text{vol}(T)$$

and

$$|E(T \setminus S, V \setminus (T \setminus S))| \leq |E(T, V \setminus T)| + |E(S, V \setminus S)| \leq \phi_2 \text{vol}(T) + \phi_1 \text{vol}(S) \stackrel{(22)}{<} \phi_2 \text{vol}(T) + \phi_1 \cdot \frac{1}{c} \text{vol}(T).$$

Therefore,

$$\frac{|E(T \setminus S, V \setminus (T \setminus S))|}{\text{vol}(T \setminus S)} < \frac{(\phi_2 + \phi_1/c) \text{vol}(T)}{(c-1)/c \cdot \text{vol}(T)} = \frac{c\phi_2 + \phi_1}{c-1},$$

establishing (23). \square

The rest of this section is for proving Theorem 7.3 and is organized as follows. In Section 7.2, we give definitions and basic properties about PageRank. In Section 7.3, we show the key technical result of this section. This is the subroutine for finding a low conductance cut, given a PageRank vector. Previous algorithms based on PageRank need to compute the size of a cut (i.e. the number of edge crossing the cut). In fact, most algorithms “sweep through” a PageRank vector and compute the size of n many cuts. Hence, this procedure is often called “sweep cut”. We show an algorithm that, given a PageRank vector and access to degrees of vertices, does not need to compute a cut size of any cut at all, and can still guarantee to return a low conductance cut (given appropriate parameters).

Subsequent sections show how to exploit the algorithm in Section 7.3. We present in a backward manner. Section 7.4 shows how to compute find a low conductance cut by calling the algorithm in Section 7.3 once, given a set of vertices with large *excess* (where excess is defined from a PageRank vector). Section 7.5 shows that if there exists a low conductance cut, then there must exist a set of vertices with large excess. Section 7.6 shows the final algorithm which computes the PageRank vectors from all vertices simultaneously, and obtain many low conductance cuts by the guarantees of previous sections, and then combines them to obtain the near-expander cut as desired in Theorem 7.3.

7.2 Preliminaries about PageRank

We will follow [KT19]’s treatment of PageRank [ACL’06], which is more algorithmic and can be better adapted to our binary search algorithm. For our algorithm and analysis, we will only need the following definition of PageRank vector, following Section 2.1 of [ACL06]:

Definition 7.5 (PageRank vector [ACL06]). Given real number $\alpha \in (0, 1]$ and vector $\mathbf{v} \in \mathbb{R}^V$ satisfying $\mathbb{1}^T \mathbf{v} = 1$, the *PageRank vector starting at \mathbf{v}* , denoted $PR(\mathbf{v})$, is the unique solution to

$$PR(\mathbf{v}) = \alpha \mathbf{v} + (1 - \alpha) PR(\mathbf{v}) W. \quad (24)$$

Here, $W = \frac{1}{2}(I + D^{-1}A)$, where A is the adjacency matrix of G and D is the diagonal matrix with entry $\deg(v)$ at row and column v , for each $v \in V$. (W is known as the lazy random walk transition matrix.)

We refer to p as a *PageRank vector* if $p = PR(\mathbf{v})$ for some (possibly unspecified) vector \mathbf{v} with $\mathbb{1}^T \mathbf{v} = 1$.

We will use the following important properties of PageRank vectors; see Section 2 of [ACL06] for more details.

Fact 7.6. For any vector \mathbf{v} , the PageRank vector $PR(\mathbf{v})$ is unique. Moreover, it satisfies $PR(\mathbf{v}) \geq 0$ and $\mathbb{1}^T PR(\mathbf{v}) = 1$.

Definition 7.7. Given a PageRank vector p and a real number t , we define the vertex sets $V_{\geq t}^p := \{v \in V : p(v)/d(v) \geq t\}$ and $V_{\leq t}^p := \{v \in V : p(v)/d(v) \leq t\}$.

We show some terminology and lemmas from [KT19].

Definition 7.8 (Median Expansion). Given any value t such that $\partial V_{\geq t}^p \neq \emptyset$, there exists some $t_{med} < t$ (the “median”) such that half the edges $\partial V_{\geq t}^p$ go to vertices in $V_{\geq t_{med}}^p$ and half go to vertices in $V_{\leq t_{med}}^p$. We call t_{med} the *median expansion* at t .

Claim 7.9. If t_{med} is the median expansion at t , then:

$$\text{vol}(V_{\geq t_{med}}^p) \geq \text{vol}(V_{\geq t}^p) + |\partial V_{\geq t}^p|/2. \quad (25)$$

Proof. By definition, at least half the edges of $\partial V_{\geq t}^p$ go to vertices in $V_{\geq t_{med}}^p$. These edges make up at least $|\partial V_{\geq t}^p|$ extra volume in $V_{\geq t_{med}}^p$ when compared to $V_{\geq t}^p$. \square

The following lemma is proved in the proof of Lemma 33 in [KT19]:

Lemma 7.10 (Lemma 33 of [KT19]). If t_{med} is the median expansion at t , then:

$$t - t_{med} \leq \frac{6\alpha}{|\partial V_{\geq t}^p|}. \quad (26)$$

7.3 Sweep Cut without Cut-size Query

Previous algorithms based on PageRank need to compute the number of edges crossing some cut, for at least one cut. This might take $O(m)$ time in the worst-case. In this section, we show that this we do not need to query for the cut-size at all.

Lemma 7.11 (Sweep-cut with few queries). Suppose we have PageRank vector p , a real number t_0 that satisfies $\text{vol}(V_{\geq t_0}^p) \leq 1.5m$, and a real number $\tau \in (t_0, 1]$. Suppose that we have access to an data structure that, given t , can return $\text{vol}(V_{\geq t}^p) = \sum_{v \in V_{\geq t}^p} \deg(v)$ in $O(\log n)$ time.

Then, for any $\tau \in (t_0, 1]$, we can compute a cut of conductance at most $\sqrt{\frac{54\alpha}{(\tau - t_0)\text{vol}(V_{\geq \tau}^p)}}$ in $O(\log(\frac{\log m}{\phi})) = O(\log m)$ queries. Hence, the running time is $O(\log^2 m)$.

We note that our constraint $\text{vol}(V_{\geq t_0}^p) \leq 1.5m$ is looser than the constraint $\text{vol}(V_{\geq t_0}^p) \leq m$ in Section 7.2 of [KT19]. This explains the difference in our bound $\sqrt{\frac{54\alpha}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$ compared to the bound $\sqrt{\frac{18\alpha}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$ in [KT19]

Algorithm 2 SweepCutBinarySearch(G, p, t_0, τ)

Assumptions: t_0 satisfies $\text{vol}(V_{\geq t_0}^p) \leq 1.5m$ and τ satisfies $\tau \in (t_0, 1]$; access to an data structure \mathcal{D} that, given t , can return $\text{vol}(V_{\geq t}^p) = \sum_{v \in V_{\geq t}^p} \deg(v)$ in $O(\log n)$ time.

Output: A cut with conductance at most ϕ (as defined in line 1)

Runtime: $O(\log m)$ queries to \mathcal{D} in $O(\log^2 m)$ time.

- 1: $\phi \leftarrow \sqrt{\frac{54\alpha}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$, $t_{init} \leftarrow \tau$, $L_{init} \leftarrow \lceil \log_{(1+\phi/2)}(2m) \rceil$
 - 2: $t_+ \leftarrow t_{init}$, $L \leftarrow L_{init}$ ▷ Maintain tuple (t_+, L) in binary search
 - 3: **while** $L > 1$ **do**
 - 4: $t_{mid} \leftarrow t_+ - \sum_{i=0}^{\lfloor L/2 \rfloor - 1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1+\phi/2)^i}$
 - 5: **if** $\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^{\lfloor L/2 \rfloor} \geq \text{vol}(V_{\geq t_{mid}}^p)$ **then**
 - 6: $L \leftarrow \lfloor L/2 \rfloor$ ▷ $(t_+, L) \leftarrow (t_+, \lfloor L/2 \rfloor)$
 - 7: **else**
 - 8: $t_+ \leftarrow t_{mid}$, $L \leftarrow \lfloor L/2 \rfloor$ ▷ $(t_+, L) \leftarrow (t_{mid}, \lfloor L/2 \rfloor)$
 - 9: **return** $V_{\geq t_+}^p$ ▷ **Guarantee:** $\Phi(V_{\geq t_+}^p) \leq O(\phi)$
-

Remark 7.12. We will be applying this with $(\tau - t_0) = \Theta(\epsilon)$ and $\text{vol}(V_{\geq \tau}^p) = \Omega(1/(\epsilon \log m))$ for some ϵ , so that the ϵ 's cancel in the denominator of $\phi = \sqrt{\frac{54\alpha}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$, and we get a cut of conductance $O(\sqrt{\alpha \log m})$.

Clearly, the number of queries in the algorithm $O(\log L_{init}) = O(\log(\frac{\log m}{\phi})) = O(\log m)$ queries. The rest of this section is dedicated to proving the promised guarantee:

Lemma 7.13. *Algorithm 2 outputs a cut of conductance at most $\sqrt{\frac{O(\alpha)}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$.*

We now proceed to the proof of Lemma 7.13. We will maintain the following invariant throughout the binary search:

Invariant 7.14. *The tuple (t_+, L) always satisfies the following. Define*

$$t_- := t_+ - \sum_{i=0}^{L-1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1+\phi/2)^i}; \quad (27)$$

then, we must have $t_- \geq t_0$ and

$$\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^L \geq \text{vol}(V_{\geq t_-}^p). \quad (28)$$

There are three items that need to be proven:

Claim 7.15. *Invariant 7.14 is satisfied at the beginning, for tuple (τ_{init}, L_{init}) .*

Proof. We have $\text{vol}(V_{\geq t_+}^p)(1 + \phi/2)^{L_{\text{init}}} \geq (1 + \phi/2)^{L_{\text{init}}} \geq 2m \geq \text{vol}(V_{\geq t_-}^p)$, satisfying (28). As for $t_- \geq t_0$, we have

$$\begin{aligned}
t_- &\stackrel{(27)}{=} \tau - \sum_{i=0}^{L-1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1 + \phi/2)^i} \\
&\geq \tau - \sum_{i=0}^{\infty} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1 + \phi/2)^i} \\
&= \tau - \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)} \cdot \frac{1}{1 - (1 + \phi/2)^{-1}} \\
&= \tau - \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)} \cdot \frac{1 + \phi/2}{\phi/2} \\
&\geq \tau - \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)} \cdot \frac{3}{\phi} = \tau - \frac{54\alpha}{\phi^2 \text{vol}(V_{\geq t_+}^p)},
\end{aligned}$$

where the last inequality used that $\phi \leq 1$, which we can safely assume (otherwise, the guarantee $\Phi(V_{\geq t_+}^p) \leq \phi$ of Algorithm 2 is vacuous). Plugging in $\phi = \sqrt{\frac{54\alpha}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$, we obtain $t_- \geq \tau - (\tau - t_0) = t_0$, as desired. \square

Claim 7.16. *Suppose that Invariant 7.14 is satisfied at the end, for some tuple $(t_+, 1)$. Then,*

$$\Phi(V_{\geq t_+}^p) \leq \sqrt{\frac{O(\alpha)}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}.$$

Proof. Define $\phi := \sqrt{\frac{54\alpha}{(\tau-t_0)\text{vol}(V_{\geq \tau}^p)}}$, and suppose for contradiction that

$$\Phi(V_{\geq t_+}^p) = \frac{|\partial V_{\geq t_+}^p|}{\min\{\text{vol}(V_{\geq t_+}^p), \text{vol}(V \setminus V_{\geq t_+}^p)\}} > 3\phi.$$

Assuming Invariant 7.14, we have $t_+ \geq t_- \geq t_0$. Also, $\text{vol}(V_{\geq t_0}^p) \leq 1.5m$ by assumption, so

$$\text{vol}(V_{\geq t_+}^p) \leq \text{vol}(V_{\geq t_0}^p) \leq 1.5m \implies \min\{\text{vol}(V_{\geq t_+}^p), \text{vol}(V \setminus V_{\geq t_+}^p)\} \geq \frac{1}{3}\text{vol}(V_{\geq t_+}^p).$$

In particular, $|\partial V_{\geq t_+}^p| \geq \phi \text{vol}(V_{\geq t_+}^p) \geq (\phi/3) \text{vol}(V_{\geq t_+}^p)$. Let t_{med} be the median expansion at t_+ . By Lemma 7.10, $t_+ - t_{\text{med}} \leq 6\alpha/|\partial V_{\geq t_+}^p| \leq 18\alpha/(\phi \text{vol}(V_{\geq t_+}^p))$. In particular,

$$t_{\text{med}} \geq t_+ - 18\alpha/(\phi \text{vol}(V_{\geq t_+}^p)) \stackrel{(27)}{=} t_-.$$

Therefore,

$$\begin{aligned}
\text{vol}(V_{\geq t_+}^p)(1 + \phi/2)^1 &\stackrel{(28)}{\geq} \text{vol}(V_{\geq t_-}^p) \geq \text{vol}(V_{\geq t_{\text{med}}}^p) \stackrel{\text{Lem 7.9}}{\geq} \text{vol}(V_{\geq t_+}^p) + |\partial V_{\geq t_+}^p|/2 \\
&\implies |\partial V_{\geq t_+}^p| \leq \phi \text{vol}(V_{\geq t_+}^p) \leq 3\phi \min\{\text{vol}(V_{\geq t_+}^p), \text{vol}(V \setminus V_{\geq t_+}^p)\},
\end{aligned}$$

contradicting the assumption that $|\partial V_{\geq t_+}^p| > 3\phi \min\{\text{vol}(V_{\geq t_+}^p), \text{vol}(V \setminus V_{\geq t_+}^p)\}$. \square

Claim 7.17. *Suppose Invariant 7.14 is satisfied before an iteration of the **while** loop. Then, it is still satisfied after that iteration.*

Proof. Suppose (t, L) is the tuple at the beginning of the iteration, and define t_- as in (27). First, suppose the **If** statement (line 5) is true. In order to prove that Invariant 7.14 is maintained, we need to show that for $t'_- := t_+ - \sum_{i=0}^{\lfloor L/2 \rfloor - 1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1+\phi/2)^i}$, we have $t'_- \geq t_0$ and $\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^{\lfloor L/2 \rfloor} \geq \text{vol}(V_{\geq t'_-}^p)$. The former inequality is easy: clearly $t'_- \geq t_-$, and we know $t_- \geq t_0$ since we assumed Invariant 7.14 is satisfied for (t, L) . For the latter inequality, observe that $t_{mid} = t'_-$ by definition (line 4); therefore, since the **If** is true,

$$\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^{\lfloor L/2 \rfloor} \geq \text{vol}(V_{\geq t_{mid}}^p) = \text{vol}(V_{\geq t'_-}^p),$$

as desired.

Now suppose that the **If** is false, which means that

$$\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^{\lfloor L/2 \rfloor} \leq \text{vol}(V_{\geq t_{mid}}^p). \quad (29)$$

This time, we define

$$\begin{aligned} t'_- &:= t_{mid} - \sum_{i=0}^{\lfloor L/2 \rfloor - 1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_{mid}}^p)(1+\phi/2)^i} \\ &\stackrel{(29)}{\geq} t_{mid} - \sum_{i=0}^{\lfloor L/2 \rfloor - 1} \frac{18\alpha}{\phi \cdot (\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^{\lfloor L/2 \rfloor}) \cdot (1+\phi/2)^i} \\ &= t_{mid} - \sum_{i=\lfloor L/2 \rfloor}^{L-1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1+\phi/2)^i} \\ &\stackrel{\text{line 4}}{=} t_+ - \sum_{i=0}^{L-1} \frac{18\alpha}{\phi \text{vol}(V_{\geq t_+}^p)(1+\phi/2)^i} \\ &\stackrel{(27)}{=} t_-. \end{aligned}$$

Again, this means that $t'_- \geq t_- \geq t_0$. Also, $\text{vol}(V_{\geq t'_-}^p) \leq \text{vol}(V_{\geq t_-}^p)$, so

$$\begin{aligned} \text{vol}(V_{\geq t_{mid}}^p) \cdot (1+\phi/2)^{\lfloor L/2 \rfloor} &\stackrel{(29)}{\geq} \left(\text{vol}(V_{\geq t_+}^p)(1+\phi/2)^{\lfloor L/2 \rfloor} \right) \cdot (1+\phi/2)^{\lfloor L/2 \rfloor} \\ &= \text{vol}(V_{\geq t_+}^p)(1+\phi/2)^L \\ &\stackrel{(28)}{\geq} \text{vol}(V_{\geq t_-}^p) \\ &\geq \text{vol}(V_{\geq t'_-}^p), \end{aligned}$$

so Invariant 7.14 is satisfied for the tuple $(t_{mid}, \lfloor L/2 \rfloor)$. \square

7.4 Computing Low Conductance Cuts from Large Excess

Definition 7.18 (Excess). Given a PageRank vector p , the *excess* at a vertex v is defined as

$$\text{excess}(p, v) := p(v) - \frac{\deg(v)}{2m}.$$

The excess of a vertex set $S \subseteq V$ is

$$\text{excess}(p, S) := \sum_{v \in S} \text{excess}(p, v) = p(S) - \frac{\text{vol}(S)}{2m}.$$

When the PageRank vector p is implicit, we shorten the notations to $\text{excess}(v)$ and $\text{excess}(S)$.

The main result of this section is the following:

Lemma 7.19. *Fix a PageRank vector p , and define $S := \{v \in V : \text{excess}(p, v)/\deg(v) \geq \frac{1}{100m}\}$. (Note that $S = V_{\geq 1/(2m)+1/(100m)}^p$.) Suppose S satisfies the following two properties:*

1. $\text{excess}(S) \geq 1/10$
2. $\text{vol}(S) \leq 1.5m$

Then, there is an algorithm that makes a single call to Algorithm 2 and outputs a cut of conductance $O(\sqrt{\alpha \log m})$.

Proof. Partition the vertices of S into $O(\log m)$ “excess buckets” as follows: for each positive integer $i \leq \log_2(50m)$, form a bucket $B_{2^{-i}} := \{v \in S : \text{excess}(v)/\deg(v) \in (2^{-i}, 2^{-i+1}]\}$.

Define $S^- := \{v \in S : \text{excess}(v)/\deg(v) \leq \frac{1}{25m}\}$. Observe that

$$\text{excess}(S^-) = \sum_{v \in S^-} \text{excess}(v) \leq \sum_{v \in S^-} \deg(v) \cdot \frac{1}{25m} \leq 2m \cdot \frac{1}{25m} = \frac{1}{12.5},$$

so $\text{excess}(S \setminus S^-) \geq 1/10 - 1/12.5 = 1/50$. Also, all vertices in $S \setminus S^-$ belong to exactly one bucket, which means

$$\sum_{i=1}^{\lceil \log_2(50m) \rceil} \text{excess}(B_{2^{-i}}) \geq \text{excess}(S \setminus S^-) = \frac{1}{50}.$$

In particular, there exists a bucket B_ϵ ($\epsilon = 2^{-i}$ for some $i \leq \log_2(50m)$) with $\text{excess}(B_\epsilon) \geq \frac{1}{50 \lceil \log_2(50m) \rceil} \geq \frac{1}{50 \log_2(50m)}$. Since each vertex $v \in B_\epsilon$ satisfies $\text{excess}(v)/\deg(v) \leq \epsilon \iff \deg(v) \geq \text{excess}(v)/\epsilon$, we have

$$\text{vol}(B_\epsilon) = \sum_{v \in B_\epsilon} \deg(v) \geq \sum_{v \in B_\epsilon} \frac{1}{\epsilon} \text{excess}(v) = \frac{1}{\epsilon} \cdot \text{excess}(B_\epsilon) \geq \frac{1}{50\epsilon \log_2(50m)} = \Omega\left(\frac{1}{\epsilon \log m}\right).$$

Also, since $B_\epsilon \subseteq V_{\geq \epsilon}^p$, we have $\text{vol}(V_{\geq \epsilon}^p) = \Omega(1/(\epsilon \log m))$ as well.

Set $t_0 \leftarrow \frac{1}{2m} + \epsilon/2$ and $\tau \leftarrow \frac{1}{2m} + \epsilon$.⁷ Since $\epsilon \geq 1/(50m)$, we have $t_0 \geq \frac{1}{2m} + \frac{1}{100m}$, and since $\text{vol}(V_{\geq 1/(2m)+1/(100m)}^p) \leq 1.5m$, the guarantee $\text{vol}(V_{\geq t_0}^p) \leq 1.5m$ of Lemma 7.11 is satisfied. Finally, invoking Algorithm 2 with this t_0 and τ gives a cut of conductance

$$\sqrt{\frac{18\alpha}{(\tau - t_0) \text{vol}(V_{\geq \tau}^p)}} \leq \sqrt{\frac{18\alpha}{(\epsilon/2) \cdot \Omega(1/(\epsilon \log m))}} = O\left(\sqrt{\alpha \log m}\right).$$

□

7.5 Guarantee of Large Excess from Existence of Low Conductance Cuts

Here, we justify the assumptions (1) and (2) of Lemma 7.19, assuming that a low-conductance cut S exists in the graph. We use the theorem below of [ACL06].

Theorem 7.20 (Theorem 4 of [ACL06]). *For any set C with $\text{vol}(C) \leq m$ and any constant $\alpha \in (0, 1]$, there is a subset $C_\alpha \subseteq C$ with volume $\text{vol}(C_\alpha) \geq \text{vol}(C)/2$ such that for any vertex $v \in C_\alpha$, the PageRank vector $p = p(\chi_v)$ satisfies $p(C) \geq 1 - 2\Phi(C)/\alpha$.*

For the application in [ACL06], the guarantee $\text{vol}(C_\alpha) \geq \text{vol}(C)/2$ is important, since it means that a random vertex from C , weighted by degree, is in C_α with probability $1/2$. In contrast, since we are in the deterministic setting, we only need C_α to be nonempty, which Theorem 7.20 guarantees.

Claim 7.21. *Let C be a cut of conductance ϕ in G ($\text{vol}(C) \leq m$), let $\alpha \geq 400\phi$, and fix an arbitrary vertex $s \in C_\alpha$. For PageRank vector $p = p(x_s)$, Conditions (1) and (2) of Lemma 7.19 is satisfied.*

Proof. As in Lemma 7.19, define $S := \{v \in V : \text{excess}(p, v)/\text{deg}(v) \geq \frac{1}{100m}\}$.

We first prove Condition (1). By Theorem 7.20, $p(C) \geq 1 - 2\Phi(C)/\alpha \geq 1 - 1/200$, so

$$\text{excess}(C) = \sum_{v \in C} \left(p(v) - \frac{\text{deg}(v)}{2m} \right) = p(C) - \frac{\text{vol}(C)}{2m} \geq \left(1 - \frac{1}{200} \right) - \frac{1}{2} \geq \frac{1}{3}.$$

Let $C^- := \{v \in C : \text{excess}(v)/\text{deg}(v) < \frac{1}{100m}\} = C \setminus S$. Observe that

$$\text{excess}(C^-) = \sum_{v \in C^-} \text{excess}(v) \leq \sum_{v \in C^-} \text{deg}(v) \cdot \frac{1}{100m} \leq \frac{2m}{100m} = \frac{1}{50}.$$

Since $C \setminus C^- = C \cap S \subseteq S$, we have

$$\text{excess}(S) \geq \text{excess}(C \setminus C^-) = \text{excess}(C) - \text{excess}(C^-) \geq \frac{1}{3} - \frac{1}{50} \geq \frac{1}{10},$$

proving Condition (1).

For Condition (2), let $C^+ := \{v \notin C : \text{excess}(v)/\text{deg}(v) \geq \frac{1}{100m}\} = S \setminus C$. By Theorem 7.20, $p(C^+) \leq p(V \setminus C) \leq 1/200$, so

$$\text{vol}(C^+) = \sum_{v \in C^+} \text{deg}(v) \leq \sum_{v \in C^+} \text{excess}(v) \cdot 100m \leq \sum_{v \in C^+} p(v) \cdot 100m \leq \frac{1}{200} \cdot 100m \leq \frac{1}{2}m.$$

Therefore $\text{vol}(S) \leq \text{vol}(C \cup C^+) = \text{vol}(C) + \text{vol}(C^+) \leq m + m/2$, proving Condition (2). □

⁷Recall that $V_{\geq t}$ is defined for *densities*, whereas we have *excesses*, hence the additional $1/(2m)$ term.

7.6 Merging Low Conductance Cuts into a Near-Expander Cut

Lemma 7.22. *Given a real number $\alpha \in (0, 1]$ and n initial vectors $\mathbf{v}_1, \dots, \mathbf{v}_n$, we can compute the n PageRank vectors $PR(\mathbf{v}_1), \dots, PR(\mathbf{v}_n)$ in time $O(n^\omega)$.*

Proof. We have

$$PR(\mathbf{v}_i) \stackrel{(24)}{=} \alpha \mathbf{v}_i (I - (1 - \alpha)W)^{-1},$$

where $I - (1 - \alpha)W$ is guaranteed to be invertible by the uniqueness statement in Fact 7.6. Let \mathbf{V} be the matrix with \mathbf{v}_i as the i 'th row; then, $PR(\mathbf{v}_i)$ is simply the i 'th row of $\alpha \mathbf{V} (I - (1 - \alpha)W)^{-1}$. Since matrix inversion and matrix multiplication can be computed in $O(n^\omega)$ time, the lemma follows. \square

The algorithm computes PageRank starting at the n vectors $\{\chi_v : v \in V\}$. Then, for each vertex $v \in V$ and each of the $O(\log m)$ buckets B_ϵ (for that v),

Algorithm 3 MostBalancedEdgeCut(G, ϕ)

Assumption: $\Phi(G) < \phi$

Output: a $(\frac{\phi}{\log_2(50m)})$ -near-expander $(\sqrt{\phi \log m})$ -conductance cut

Runtime: $O(n^\omega)$

- 1: Compute the n PageRank vectors $PR(\chi_v)$ for each $v \in V$ $\triangleright O(n^\omega)$ time by Lemma 7.22
 - 2: Compute the degree $\deg(v)$ for each $v \in V$ $\triangleright O(n^2)$ time
 - 3: $\mathcal{C} \leftarrow \emptyset$ $\triangleright \mathcal{C} \subseteq 2^V$ will be a collection of low-conductance cuts
 - 4: **for** each $p_v \leftarrow PR(\chi_v)$ **do**
 - 5: Create a data structure that, given t , can return $\text{vol}(V_{\geq t}^{p_v}) = \sum_{u \in V_{\geq t}^{p_v}} \deg(u)$ in $O(\log n)$ time. $\triangleright O(n \log n)$ time using balanced binary search trees
 - 6: Form the $O(\log m)$ excess buckets as in Lemma 7.19 with $\alpha = 400\phi$
 - 7: $B_\epsilon \leftarrow$ some bucket with $\text{excess}(B_\epsilon) \geq 1/(50 \log_2(50m))$
 - 8: Call Algorithm 2 on $(G, p_v, 1/(2m) + \epsilon/2, 1/(2m) + \epsilon)$, which returns a set C ($\text{vol}(C) \leq 1.5m$) of conductance $O(\sqrt{\alpha \log m}) = O(\sqrt{\phi \log m})$
 - 9: Add C to \mathcal{C}
 - 10: $S \leftarrow \emptyset$ $\triangleright S \subseteq V$ will be the near-expander conductance cut
 - 11: **for** each cut $C \in \mathcal{C}$ in arbitrary order **do**
 - 12: **if** $\text{vol}(C \setminus S) \geq \text{vol}(C)/2$ **then**
 - 13: $S \leftarrow S \cup C$
 - 14: **if** $\text{vol}(S) \geq m/4$ **then**
 - 15: **break** \triangleright Exit the **for** loop
 - 16: **return** S or $V \setminus S$, whichever has smaller volume
-

Theorem 7.23. *Algorithm 3 returns a $(\frac{\phi}{\log_2(50m)})$ -near-expander $O(\sqrt{\phi \log m})$ -conductance cut.*

Proof. Let $\phi' \leq O(\sqrt{\phi \log m})$ be an upper bound to the conductance of any cut C from line 8. We first claim that at all times of the algorithm, $|\partial S| \leq 2\phi' \text{vol}(S)$. Intuitively, this is because every time we add a set C to S (line 15), the new edges in ∂S can be “charged” to the new

volume $\text{vol}(C \setminus S)$, which is always at least $\text{vol}(C)/2$. More formally, $|\partial S| \leq 2\phi' \text{vol}(S)$ is clearly satisfied initially with $S = \emptyset$, and whenever a new set C is added (line 13),

$$|\partial(S \cup C)| \leq |\partial S| + |\partial C| \leq 2\phi' \text{vol}(S) + \phi' \text{vol}(C) \leq 2\phi' \text{vol}(S) + 2\phi' \text{vol}(C \setminus S) = 2\phi' \text{vol}(S \cup C).$$

Suppose that line 15 is reached in the algorithm. Let S' be the set S before the last cut C was added to it (line 13). Since $\text{vol}(S') \leq m/4$, we must have $\text{vol}(S) = \text{vol}(S' \cup C) \leq \text{vol}(S') + \text{vol}(C) \leq 1.5m + m/4 = 2m - m/4$. This means that

$$\min\{\text{vol}(S), \text{vol}(V \setminus S)\} \geq \frac{1}{7} \text{vol}(S).$$

Therefore, the cut S that is output satisfies

$$\Phi(S) = \frac{|\partial S|}{\min\{\text{vol}(S), \text{vol}(V \setminus S)\}} \leq \frac{|\partial S|}{\text{vol}(S)/7} \leq 14\phi'.$$

This, along with the fact that $\min\{\text{vol}(S), \text{vol}(V \setminus S)\} \geq m/4$, shows that the algorithm outputs a near-expander $14\phi'$ -conductance cut, as desired.

Now suppose that line 15 is never reached. We know that $\text{vol}(S) < m/4$, so the algorithm returns S (and not $V \setminus S$). Suppose for contradiction that S is not $(\frac{\phi}{\log_2(50m)})$ -near-expander ($14\phi'$ -conductance cut). By Definition 7.2, this can only happen if $V \setminus S$ is not a nearly $\frac{\phi}{\log_2(50m)}$ -expander, which means there exists $T \subseteq V \setminus S$ with $\text{vol}(T) \leq \text{vol}(V \setminus S)/2$ and $|E(T, V \setminus T)| < \frac{\phi}{\log_2(50m)} \text{vol}(T)$. Our goal is to show that there exists some $C \in \mathcal{C}$ that should have been added to S in line 13, a contradiction.

As $\alpha = 400\phi$, by Theorem 7.20 applied to α and T , there is a vertex $t \in T$ such that if we start PageRank at t , we have $p(T) \geq 1 - 2\Phi(T)/\alpha$. This means that

$$\text{excess}(V \setminus T) \leq p(V \setminus T) \leq \frac{2\Phi(T)}{\alpha} \leq \frac{2 \cdot \phi / \log_2(50m)}{400\phi} = \frac{1}{200 \log_2(50m)}. \quad (30)$$

By Claim 7.21 applied to T , the conditions of Lemma 7.19 are satisfied. Following the proof of Lemma 7.19, there exists a bucket B_ϵ with $\text{excess}(B_\epsilon) \geq \frac{1}{50 \log_2(50m)}$ and $\text{vol}(B_\epsilon) \geq \frac{1}{\epsilon} \text{excess}(B_\epsilon) \geq \frac{1}{50\epsilon \log_2(50m)}$. Since Algorithm 2 is called with $\tau \leftarrow \frac{1}{2m} + \epsilon$, the cut C returned satisfies

$$\text{vol}(C) \geq \text{vol}(V_{\geq 1/(2m)+\epsilon}^p) \geq \text{vol}(B_\epsilon) \geq \frac{1}{50\epsilon \log_2(50m)} \quad (31)$$

(where p is the relevant PageRank vector). Also, since Algorithm 2 is called with $t_0 \leftarrow \frac{1}{2m} + \epsilon/2$, all vertices v in the returned cut C satisfy $\text{excess}(v) \geq \epsilon/2$. Therefore,

$$\text{vol}(V \setminus T) \leq \frac{2}{\epsilon} \cdot \text{excess}(V \setminus T) \stackrel{(30)}{\leq} \frac{2}{\epsilon} \cdot \frac{1}{200 \log_2(50m)} = \frac{1}{100\epsilon \log_2(50m)} \stackrel{(31)}{\leq} \frac{\text{vol}(C)}{2}.$$

Therefore,

$$\text{vol}(C \setminus S) \geq \text{vol}(C \cap T) \geq \text{vol}(C) - \text{vol}(V \setminus T) \geq \text{vol}(C)/2,$$

which means that C should have been added to S in line 13, contradiction. \square

Thus, Algorithm 3 achieves the guarantees of Theorem 7.3. Apply Lemma 7.4 with $\phi_1 = \Theta(\sqrt{\phi \log m})$, $\phi_2 = \Theta(\phi / \log(m))$, and $c := \Theta(\phi^{-0.5} \log^{1.5} m)$ then gives the guarantees of the dense approximate balanced cut algorithm from Theorem 2.7.

8 Most-Balanced Low-Conductance Cuts on Sparse Graphs

Our next goal is to speed up the previous algorithm on sparse graphs.

Theorem 2.8. *Given an $(f(\phi), c)$ -approximate balanced-cut routine with running time $T_{BalCut}(n, m)$, along with any integer parameter $k > 0$, there is also an $(f(O(\phi \log^3 n)), 10c)$ -approximate balanced-cut routine with running time:*

$$\widehat{O}(k(m + T_{BalCut}(m/k, m))).$$

As before in Section 7, for explanation purposes, it is more convenient to assume that there exists S^* where $\Phi(S^*) \leq 1/\text{poly log } n$ and $\text{vol}(S^*) = \Omega(m)$, and our goal is find a $(1/\log n)$ -conductance cut S where $\text{vol}(S) = \Omega(m)$.

The main technique we use here is the j -trees by Madry [Mad10]. A j -tree is a graph where consisting of two parts:

1. a core K which contains at most j vertices, and
2. a forest F such that for each tree $T \in F$, $|V(T) \cup V(K)| = 1$.

Intuitively, j -trees are graphs with j vertices that have a forest “attached” to it. Although j -trees are very restricted form of graphs, Madry [Mad10] shows that a collection of j -trees can approximate an arbitrary graph in the following sense:

Fact 8.1 ([Mad10] Paraphrased). There is an deterministic algorithm that, given an m -edge graph G and a parameter t , runs in $\tilde{O}(mt)$ time and outputs t many $\tilde{O}(m/t)$ -trees G_1, \dots, G_t such that, for any $C \subset V$

- $|E_G(C, V - C)| \leq |E_{G_i}(C, V - C)|$ for all i , and
- $|E_{G_i}(C, V - C)| \leq \alpha |E_G(C, V - C)|$ for some i where $\alpha = O(\log^3 n)$.

To discuss the main idea, it is more convenient to use a notion of *sparsity* of cuts. Namely, the sparsity of a cut S is $\sigma(S) = \frac{E(S, V-S)}{\min\{|S|, |V-S|\}}$. A (ϕ^*, c) -most-balanced ϕ -sparse cut S is such that $\sigma(S) \leq \phi$ and $|S| \geq |S^*|/c$ where S^* is the set with maximum $|S^*|$ out of all sets S' where $\sigma(S') \leq \phi^*$. In this language, our goal is to find a cut with $\phi^* = O(\phi^2/\text{poly log } m)$ and $c = \tilde{O}(1)$.

Setting C in Fact 8.1 above to S^* gives that there is some i such that $|E_{G_i}(S^*, V - S^*)| \leq \alpha |E_G(S^*, V - S^*)|$. So S^* has sparsity $\sigma_{G_i}(S^*) \leq \alpha \phi^*$. Let S_i be an $(\alpha \phi^*, c)$ -most-balanced ϕ -sparse cut in G_i . That is, $\sigma_{G_i}(S_i) \leq \phi$ and $|S_i| \geq |S^*|/c$. As $|E_G(S_i, V - S_i)| \leq |E_{G_i}(S_i, V - S_i)|$, we have

$$\sigma_G(S_i) \leq \phi.$$

That is, S_i is in fact a (ϕ^*, c) -most-balanced ϕ -sparse in G . This argument shows that it suffices to compute an $(\alpha \phi^*, c)$ -most-balanced ϕ -sparse cut in each j -tree G_i where $j = \tilde{O}(m/t)$.

To compute such cut in a j -tree G_i , we will use different approaches on the core K and the forest F :

- The forest F of G_i will be computed using greedy in linear time.
- We then apply the dense graph algorithm from Section 7 to the core.

The main obstacle is that the dense graph algorithm deals with low-conductance instead of low-sparsity cuts. These two notions may be different in G_i because G_i might not have constant degree. Also, it is non-trivial how one can combine the two solution from two parts together. Thus, the bulk of our technical contribution in this section it to show that computing approximate balanced cuts on the forests and core separately is sufficient.

Theorem 8.2. *There is a deterministic $(\tilde{O}(\Delta^{3/2}\phi^{1/2}), c)$ -approximate balanced cut algorithm for graphs with maximum degree Δ that runs in $O(m^{1.579})$ time.*

Definition 8.3 (Multi-forest, multi-tree). A multigraph $G = (V, E)$ is a *multi-forest* if the support graph $\{(u, v) : \text{there exists edge } e \in E \text{ with endpoints } u, v\}$ is a forest. Similarly, a multigraph is a *multi-tree* if its support graph is a tree. We represent multiforests and multitrees in $\tilde{O}(n)$ space by storing the number of multi-edges in E for each edge in the support graph.

Definition 8.4 (j -tree). Given a multigraph $G = (V, E)$, a j -tree of G is a graph whose edges are the union of (i) a graph on a vertex set K of size j , and (ii) a multi-forest F with no edge between two vertices in K (F can contain edges not in G). The set K is called the *core* of the j -tree. (The core may not be unique.)

Theorem 8.5 ([Mad10]). *For any multigraph $G = (V, E)$ and parameter t , there exists a distribution \mathcal{D} on t multigraphs G_1, \dots, G_t of $\tilde{O}(m/t)$ -trees of G such that for any subset $C \subseteq V$:*

1. For all $i \in [t]$, $|E_G(C, V \setminus C)| \leq |E_{G_i}(C, V \setminus C)|$
2. $\mathbb{E}_{G_i \sim \mathcal{D}}[|E_{G_i}(C, V \setminus C)|] \leq \alpha |E_G(C, V \setminus C)|$ for $\alpha = O(\log^2 n \log \log n)$

Moreover, we can find such a distribution in $\tilde{O}(|E| \cdot t)$ time.

The only randomized procedure in Theorem 8.5 is the construction of low-stretch spanning trees, but this can be replaced with a deterministic construction with slightly worse parameters [EEST08]. In other words, Theorem 8.5 can be made entirely deterministic with the same guarantees up to $O(\log^2 n \log \log n)$ factors.

Definition 8.6 (Canonical j -tree). Fix a multigraph $G = (V, E, w)$ and a parameter j , and fix a vertex set $K \subseteq V$ of size j and an unweighted forest F in V with no edge between two vertices in K (F can contain edges not in G). A *canonical j -tree H with core K and forest F* is a j -tree constructed as follows: For each vertex $v \in V$, consider the tree T in F containing v , and let $r(v)$ be the (unique) vertex of T that is also in K (the “root” of T). For each edge $e = (u, v) \in E$:

1. If $r(u) = r(v)$, then for each edge e' in the path from u to v in F , add an edge e' to H .
2. Otherwise, $r(u) \neq r(v)$. For each edge e' on the path from u to $r(u)$ in F , add an edge e' to H . Do the same for each edge e' on the path from v to $r(v)$ in F . Finally, add the edge $(r(u), r(v))$ to H .

Lemma 8.7. *Fix a graph $G = (V, E)$ and a parameter j , and let H be a j -tree of G with core K such that $G \leq H \leq \alpha G$. Then, there exists a canonical j -tree H' with core K such that $G \leq H' \leq H$. Furthermore, given the core K of H , we can compute in $\tilde{O}(|V| + |E|)$ time a weighted graph H'' where each edge $(u, v) \in H''$ has weight equal to the number of (parallel) edges between u and v in H' .*

Proof. The direction $H' \geq G$ follows from the embedding of the canonical j -tree, so we focus on the other direction $H' \leq H$. Consider an embedding of G into H ; we will use this embedding to construct an embedding from H' into H . Let F be the forest of H , and for each vertex $v \in V$, let $r(v)$ be defined as in Definition 8.6 for K and F . For each edge $e = (u, v)$ in G , by the j -tree structure of H , the embedded path P_e of e in H must consist of either (1) the path from u to v in F if $r(u) = r(v)$, or (2) the path from u to $r(u)$ in F , the path from v to $r(v)$ in F , and some path from $r(u)$ to $r(v)$ in H . Now consider the edges in H' that resulted from edge e in G . In case (1), for each edge e' on the path from u to v in F , we added an edge e' in H' ; embed each edge e' onto the edge in P_e with the same endpoints of e' . This gives an embedding of the edges in H' constructed by e onto the edges of P_e . In case (2), we can do the same for the edges e' in the path from u to $r(u)$ and from v to $r(v)$. For the edge $(r(u), r(v))$ in H' , we embed it along the path from $r(u)$ to $r(v)$ in P_e . Altogether, we also embed every edge constructed by e onto the edges of P_e . Doing this for every e in G , we obtain an embedding of H' into H .

The computation of H'' is straightforward. First, for each edge $(u, v) \in G$ with $r(u) = r(v)$, we can compute the lowest common ancestor $a(u, v)$ of u and v in the corresponding tree in F rooted at $r(u) = r(v)$ [AHU76]. For each edge (u, v) with $r(u) \neq r(v)$, we can find the vertices $r(u)$ and $r(v)$. Next, for each tree in F , we can perform a simple traversal to determine, for each edge e in the tree, the number of pairs $(u, r(u))$ or $(u, a(u, v))$ whose path between the two vertices passes through e . Lastly, we can easily keep track of the edges $(r(u), r(v))$ for each edge (u, v) with $r(u) \neq r(v)$. \square

From Theorem 8.5 and Lemma 8.7, we obtain the following corollary:

Corollary 8.8. *For any multigraph $G = (V, E)$ and parameter t , there exists a distribution on t graphs G_1, \dots, G_t of $\tilde{O}(n/t)$ -trees of G such that for any subset $C \subseteq V$:*

1. For all $i \in [t]$, $w(\partial_{G_i} C) \leq w(\partial_G C)$
2. $\mathbb{E}_i[w(\partial_{G_i} C)] \leq \alpha w(\partial_G C)$

Moreover, we can find such a distribution in $\tilde{O}(|E| \cdot t)$ time.

Proof. Apply Theorem 8.5 to find the j -trees G_1, \dots, G_t , and then apply Lemma 8.7 onto each one. The two properties hold by the properties of an embedding. \square

8.1 Most-Balanced Sparse Cut on a j -tree

We will actually compute most-balanced *sparse* cut, defined as follows:

Definition 8.9 (Most-Balanced Sparse Cut). Given $G = (V, E)$ and parameters ϕ, ϕ^*, c , a set $S \subseteq V$ with $\text{vol}(S) \leq m$ is a (ϕ^*, c) -most-balanced ϕ -sparse cut if it satisfies:

1. $\sigma(S) \leq \phi$.
2. Let $S^* \subseteq V$ be the set with maximum $\text{vol}(S^*)$ out of all sets S' satisfying $\sigma(S') \leq \phi^*$ and $|S'| \leq n/2$. Then, $|S| \geq |S^*|/c$.

Algorithm 4 MostBalancedSparseCut(G, H, K, F, ϕ)

Assumption: $H = (V, E)$ is a $|K|$ -tree of G with core K and multi-forest F .

Output:

Runtime: $\tilde{O}(m + |K|^\omega)$

- 1: $H_K \leftarrow H[K]$ with the following additional *self-loops*: for each edge (u, v) in G , if $r(u) = r(v)$, then add a self-loop at $r(u) \in K$.
 - 2: $S_K \leftarrow$ (recursive) $(f(\phi), \beta)$ -approximate most-balanced low-conductance cut on H_K
 - 3: Construct a vertex-weighted multi-tree $T = (V_T, E_T, w_T)$ as follows: Starting with H , contract K into a single vertex k with weight $|K|$. All other vertices have weight 1. (The vertices of T have total weight n .)
 - 4: Root T at a vertex $r \in V_T$ such that every subtree rooted at a child of r has total weight at most $n/2$. \triangleright A subtree of T rooted at u is the set of vertices $v \in V$ whose path to r includes u .
 - 5: $S_T \leftarrow$ RootedTreeMostBalancedSparseCut(T, r, ϕ) (Algorithm 5)
 - 6: It is guaranteed that one of S_K and S_T has conductance $\leq O(\Delta\sqrt{\phi\log m})$. Of the (one or two) cuts satisfying this property, output the one with highest volume.
-

Algorithm 5 RootedTreeMostBalancedSparseCut($T = (V, E, w), r, \phi$)

Assumption: T is a weighted multi-tree with weight function $w : V \rightarrow \mathbb{N}$ (so that $w(v)$ is the weight of vertex $v \in V$). The tree is rooted at a root r such that every subtree V_u rooted at a vertex $u \in V \setminus \{r\}$ has total weight $w(V_u) \leq w(V)/2$.

Output: a set $S \subseteq V$ satisfying the conditions of Lemma 8.10.

Runtime: $\tilde{O}(n^\omega)$

- 1: Find all vertices $u \in V \setminus \{r\}$ such that if V_u is the vertices in the subtree rooted at u , then $w(E[V_u, V \setminus V_u])/|V_u| \leq 2\phi$. Let this set be X .
 - 2: Let X^\uparrow denote all vertices $u \in X$ without an ancestor in X (that is, there is no $v \in X \setminus \{u\}$ with $u \in T_v$).
 - 3: Starting with $S = \emptyset$, iteratively add the vertices V_u for $u \in X^\uparrow$. If $w(S) \geq n/4$ at any point, then terminate immediately and output S . Otherwise, output S at the end.
-

Lemma 8.10. *Algorithm 5 can be implemented to run in $O(|V|)$ time. The set S output by Algorithm 5 satisfies $|E[S, V \setminus S]|/\min\{w(S), w(V \setminus S)\} \leq 6\phi$. Moreover, for any set S^* with $|E[S^*, V \setminus S^*]|/w(S^*) \leq \phi$ and $w(S^*) \leq 2w(V)/3$, and which is composed of vertex-disjoint subtrees rooted at vertices in T , we have $\min\{w(S), w(V \setminus S)\} \geq w(S^*)/3$.*

Proof. Clearly, every line in the algorithm can be implemented in linear time, so the running time follows. We focus on the other properties.

Every set of vertices V_u added to S satisfies $|E[V_u, V \setminus V_u]|/w(V_u) \leq 2\phi$. Also, the added sets V_u are vertex-disjoint, so $|E[S, V \setminus S]| = \sum_{V_u \subseteq S} |E[V_u, V \setminus V_u]|$. This means that Algorithm 5 outputs S satisfying $|E[S, V \setminus S]|/w(S) \leq 2\phi$. Since every set V_u has total weight at most $w(V)/2$, and since the algorithm terminates early if $w(S) \geq w(V)/4$, we have $w(S) \leq 3w(V)/4$. This means that $\min\{w(S), w(V \setminus S)\} \geq w(S)/3$, so $|E[S, V \setminus S]|/\min\{w(S), w(V \setminus S)\} \leq 3|E[S, V \setminus S]|/w(S) \leq 6\phi$.

Suppose first that the algorithm terminates early. Then, as argued above, $\min\{w(S), w(V \setminus S)\} \geq w(V)/4$, which is at least $(2w(V)/3)/3 \geq w(S^*)/3$, so $\min\{w(S), w(V \setminus S)\} \geq w(S^*)/3$.

Now suppose that S does not terminate early. Let S_1^*, \dots, S_ℓ^* be the vertices in the (vertex-disjoint) subtrees that together compose S^* , that is, $\bigcup_i S_i^* = S^*$. Note that $E[S_i^*, V \setminus S_i^*]$ is a single edge in E for each i . Suppose we reorder the sets S_i^* so that S_1^*, \dots, S_q^* are the sets that satisfy $|E[S_i^*, V \setminus S_i^*]|/w(S_i^*) \leq 2\phi$. Since $|E[S^*, V \setminus S^*]|/w(S^*) \leq \phi$, by a Markov's inequality-like argument, we must have $\sum_{i \in [q]} w(S_i^*) \geq (1/2) \sum_{i \in [q]} w(S_i^*) = w(S^*)/2$. Observe that by construction of X^\uparrow , each of the subsets S_1^*, \dots, S_q^* is inside V_u for some $u \in X^\uparrow$. Therefore, the set S that Algorithm 5 outputs satisfies $w(S) \geq \sum_{i \in [q]} w(S_i^*) \geq w(S^*)/2$. The bound on $|E[S, V \setminus S]|/\min\{w(S), w(V \setminus S)\}$ follows as before. \square

Lemma 8.11. *Algorithm 4 runs in time $O(m)$ plus the recursive call (line 2 of Algorithm 4).*

Proof. Lines 3 and 4, can be easily implemented in linear time. By Lemma 8.10, line 5 also takes linear time. \square

Claim 8.12. *Let H be a $|K|$ -tree of a connected graph G with core K and multi-forest F , and let Δ be the maximum degree in G . Fix a subset $S \subseteq K$, and let S_F be the vertices in the trees in F intersecting S (note that $S_F \supseteq S$). Then,*

1. $|E_{H_K}(S, V_K \setminus S)| = |E_H(S_F, V \setminus S_F)|$, and
2. $|S_F| \leq \text{vol}_{H_K}(S) \leq \Delta \cdot |S_F|$.

Proof. For (1), observe that every edge in $E_H(S_F, V \setminus S_F)$ must belong in $H[K]$: the only difference in the edges of $H[K]$ and H_K are self-loops, which never appear in $E_{H_K}(S, V_K \setminus S)$; this proves property (1).

For (2), we first show the $|S_F| \leq \text{vol}_{H_K}(S)$ direction. For a given vertex $u \in S_F$, let $e = (u, v)$ be an edge in G incident to u , which must exist since G is connected. By the construction of H_K , e corresponds to the edge $(r(u), r(v))$ in H_K : either $r(u) \neq r(v)$ and the edge $(r(u), r(v))$ was added in the construction of H (see Definition 8.6), or $r(u) = r(v)$ and it was added in line 1 of Algorithm 4. Let us charge the vertex u to the endpoint $r(u)$ of the edge $(r(u), r(v))$ in H_K . Since no endpoint of any edge is charged more than once, and since the number of endpoints in S of edges in $H[K]$ is exactly $\text{vol}_{H_K}(S)$, we have $|S_F| \leq \text{vol}_{H_K}(S)$.

We now show the $\text{vol}_{H_K}(S) \leq \Delta \cdot |S_F|$ direction. Consider an endpoint $u \in S$ of edge (u, v) in H_K (possibly a self-loop). This edge resulted from an edge (u', v') in G with $r(u') = u$ and $r(v') = v$; note that $u' \in S_F$. Let us charge the endpoint u of edge (u, v) in H_K to the endpoint $u' \in S_F$ of edge (u', v') in G . Every vertex in $|S_F|$ can be charged at most Δ times, since its degree in G is at most Δ . Therefore, the quantity $\text{vol}_{H_K}(S)$, which equals the number of endpoints $u \in S$ of edges in H_K , is at most $\Delta \cdot |S_F|$. \square

The next lemma shows that we can transform the optimal cut $S^* \subseteq V$ into either a cut $S_T^* \subseteq V_T$ or a cut $S_K^* \subseteq H_K$ without losing too much in sparsity and volume. Note that S_T^* corresponds to a cut in H that only cuts the forest edges in F , and S_K^* corresponds to a cut in H that only cuts edges in the core $H[K]$. Then, in the proof of Lemma 8.14, we will show that the cuts S_T and S_K computed by Algorithm 4 approximate S_T^* and S_K^* respectively.

Lemma 8.13. *Let H be a $|K|$ -tree of a connected graph $G = (V, E)$ with core K and multi-forest F , and let $S^* \subseteq V$ be any cut with $|S^*| \leq n/2$ (where $n := |V|$). Let T and H_K be defined as in Algorithm 4. One of the following must hold:*

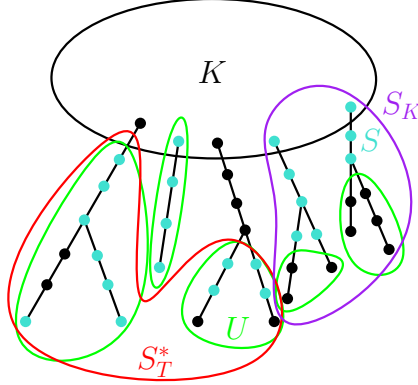


Figure 3: Cases 2a and 2b of Lemma 8.13. The set S is the cyan vertices.

1. There exists a cut S_T^* in T satisfying $|E_T(S_T^*, V \setminus S_T^*)| \leq |E_H(S^*, V \setminus S^*)|$ and $|S^*|/2 \leq w(S_T^*) \leq 2n/3$, and S_T^* is the disjoint union of subtrees of T rooted at r .
2. There exists a cut S_K^* in H_K satisfying $|E_{H_K}(S_K^*, K \setminus S_K^*)| \leq |E_H(S^*, V \setminus S^*)|$ and $\min\{\text{vol}_{H_K}(S_K^*), \text{vol}_{H_K}(K \setminus S_K^*)\} \geq |S^*|/3$.

Proof. Let $S^* \subseteq V$ the set as described in Definition 8.9 ($\sigma_H(S^*) \leq \phi$). Let U be the vertices $u \in V$ whose (unique) path to $r(u)$ in F contains at least one edge in $E[S^*, V \setminus S^*]$ (see Figure 3). Note that $U \cap K = \emptyset$ and $E_H(U, V \setminus U) \subseteq E_H(S^*, V \setminus S^*)$. Moreover, suppose we first root the tree T at k (not r); then, for each vertex $u \in U$, its entire subtree is contained in U . Therefore, U is a union of subtrees of T rooted at k .

Case 1: $r \in U$. In this case, let $U' \subseteq U$ be the vertices in the subtree containing r . Then, if we now re-root T at vertex r , then the vertices in $V_T \setminus U'$ now form a subtree. Define $S_T^* \subseteq V_T$ as $S_T^* := V_T \setminus U'$ (Figure 3 shows a different case). By our selection of r , $w(S_T^*) = w(V_T \setminus U') \leq n/2$. Moreover, $w(S_T^*) = w(V_T \setminus U') \geq |S^*|$ and $E_T(S_T^*, V \setminus S_T^*) \subseteq E_H(U, V \setminus U) \subseteq E_H(S^*, V \setminus S^*)$, so the conditions $|S^*| \leq w(S_T^*) \leq n/2$ and $|E_T(S_T^*, V \setminus S_T^*)| \leq |E_H(S^*, V \setminus S^*)|$ are satisfied, fulfilling condition (1).

Case 2a: $r \notin U$ and $|U| \geq n/6$. Since $r \notin U$, every subtree in U has weight at most $n/2$. Let U' be a subset of these subtrees of total weight in the range $[n/6, n/2]$. Define $S_T^* := U'$, which satisfies $n/2 \geq |S_T^*| \geq n/6 \geq |S^*|/3$ and $E_T(S_T^*, V \setminus S_T^*) \subseteq E_H(U, V \setminus U) \subseteq E_H(S^*, V \setminus S^*)$, fulfilling condition (1).

Case 2b: $r \notin U$ and $|U| < n/6$. In this case, let $S := S^* \cup U$, which satisfies $|S^*| \leq |S| \leq |S^*| + |U| \leq |S^*| + n/6 \leq 2n/3$ and $E_H(S, V \setminus S) \subseteq E_H(S^*, V \setminus S^*)$. Next, partition S into S_K and S_T^* , where S_K consists of the vertices of all connected components of $H[S]$ that intersect K , and $S_T^* := S \setminus S_K$ is the rest. Clearly, we have $|E_H(S_K, V \setminus S_K)| \leq |E_H(S^*, V \setminus S^*)|$ and $|E_H(S_T^*, V \setminus S_T^*)| \leq |E_H(S^*, V \setminus S^*)|$. Also, observe that for each tree T in F , either $V(T) \subseteq S_T^*$ or $V(T) \cap S_T^* = \emptyset$.

We have that either $|S_T^*| \geq |S|/2$ or $|S_K| \geq |S|/2$. If the former is true, then the set S_T^* satisfies condition (1). Otherwise, assume the latter. Since $E_H(S_K, V \setminus S_K)$ does not contain any edges in F , there exists a set $S_K^* := \{r(v) : v \in S_K\} \subseteq K$ such that S_K is the vertices in the trees in F intersecting S_K^* . This also means that $V \setminus S_K$ is the vertices in the trees of F intersecting

$K \setminus S_K^*$. By Claim 8.12 on S_K^* and $K \setminus S_K^*$, we have $|E_{H_K}(S_K^*, K \setminus S_K^*)| = |E_H(S_K, V \setminus S_K)| \leq |E_H(S^*, V \setminus S^*)|$, and

$$\min\{\text{vol}_{H_K}(S_K^*), \text{vol}_{H_K}(K \setminus S_K^*)\} \geq \min\{|S_K|, |V \setminus S_K|\}.$$

It suffices to show that $\min\{|S_K|, |V \setminus S_K|\} \geq |S^*|/3$. We have $|S_K| \leq |S^*| + n/4 \leq 3n/4$, so $\min\{|S_K|, |V \setminus S_K|\} \geq |S^*|/3$, and this along with $|S_K| \geq |S^*|$ shows that $\min\{|S_K|, |V \setminus S_K|\} \geq |S_K|/3 \geq |S^*|/3$. \square

Lemma 8.14. *For a $|K|$ -tree $H = (V, E)$ with core K and multi-forest F , and for any parameter ϕ , Algorithm 4 outputs a $(\phi, O(\Delta\beta))$ -most-balanced $\max\{f(3\phi), 6\phi\}$ -sparse cut for H .*

Proof. Let $S^* \subseteq V$ the set as described in Definition 8.9 ($\sigma_H(S^*) \leq \phi$). We need to show that Algorithm 4 outputs a cut S ($|S| \leq n/2$) satisfying $\sigma(S) \leq \max\{f(3\phi), 6\phi\}$ and $|S| \geq |S^*|/O(\Delta\beta)$.

First, suppose that condition (1) of Lemma 8.13 holds. Then, by Lemma 8.10, line 5 of Algorithm 4 returns a cut $S_T \subseteq V_T$ with $|E[S^*, V_T \setminus S^*]|/w(S^*) \leq 6\phi$ and $\min\{w(S_T), w(V_T \setminus S_T)\} \geq w(S_T^*)/3 \geq |S^*|/6$. Let $S_H := S_T \setminus \{k\} \cup K$ if $k \in S_T$ and $S_H := S_T$ otherwise. Then, $\min\{|S_H|, |V \setminus S_H|\} = \min\{w(S_T), w(V_T \setminus S_T)\} \geq |S^*|/6$ and

$$\sigma(S_H) = \frac{|E_H(S_H, V \setminus S_H)|}{\min\{|S_H|, |V \setminus S_H|\}} = \frac{|E_H(S_T, V_T \setminus S_T)|}{\min\{w(S_T), w(V_T \setminus S_T)\}} \leq 6\phi.$$

Otherwise, suppose that condition (2) of Lemma 8.13 holds. Then, the cut S_K^* satisfies

$$\Phi_{H_K}(S_K^*) = \frac{|E_{H_K}(S_K^*, K \setminus S_K^*)|}{\min\{\text{vol}_{H_K}(S_K^*), \text{vol}_{H_K}(K \setminus S_K^*)\}} \leq 3\phi.$$

By the guarantee of the recursive call in line 2, the set S_K that it outputs satisfies $\text{vol}(S_K) \leq m$ and

$$\Phi_{H_K}(S_K) \leq f(\Phi_{H_K}(S_K^*)) \leq f(3\phi)$$

and

$$\text{vol}_{H_K}(S_K) \geq (1/\beta) \cdot \min\{\text{vol}_{H_K}(S_K^*), \text{vol}_{H_K}(K \setminus S_K^*)\}.$$

Let S_F be the vertices in the trees in F intersecting S_K . By Claim 8.12 on S_K and $K \setminus S_K$, we have $|E_{H_K}(S_K, K \setminus S_K)| = |E(S_F, V \setminus S_F)|$ and $|S_F| \geq \text{vol}(S_K)/\Delta$ and $|V \setminus S_F| \geq \text{vol}(K \setminus S_K)/\Delta \geq \text{vol}(S_K)/\Delta$, so

$$\begin{aligned} \min\{|S_F|, |V \setminus S_F|\} &\geq \frac{1}{\Delta} \text{vol}_{H_K}(S_K) \\ &\geq \Omega\left(\frac{1}{\Delta\beta}\right) \cdot \min\{\text{vol}_{H_K}(S_K^*), \text{vol}_{H_K}(K \setminus S_K^*)\} \\ &\geq \Omega\left(\frac{1}{\Delta\beta}\right) \cdot |S^*|, \end{aligned} \tag{32}$$

where the last inequality follows by property (2) of Lemma 8.13. \square

8.2 Most Balanced Cut on G

Lemma 8.15. *Let G be a graph with n vertices and m edges, and fix a parameter j depending on n . Suppose we have an $(f(\phi), c)$ -approximate balanced cut algorithm (which was invoked on line 2 of Algorithm 4) that takes time $T(\hat{n}, \hat{m})$ on an input with \hat{n} vertices and \hat{m} edges. Then there is a $(\max\{f(3\alpha\Delta\phi), 6\alpha\Delta\phi\}, O(\Delta^2c))$ -approximate balanced cut algorithm that for any graph G with m edges and any parameter j , runs in time*

$$\tilde{O}\left(\frac{m}{j}(T(j, m) + m)\right).$$

Proof. Let $S^* \subseteq V$ be the set as described in Definition 8.9 ($\Phi(S^*) \leq \phi$). Since $\text{vol}(S^*) \leq \Delta|S^*|$ and $\text{vol}(S^*) \leq \text{vol}(V \setminus S^*) \leq \Delta|V \setminus S^*|$, we have $\min\{|S^*|, |V \setminus S^*|\} \geq \text{vol}(S^*)/\Delta$, so $\sigma(S^*) \leq \Delta\Phi(S^*) \leq \Delta\phi$.

Invoke Theorem 8.5 with a parameter $t := \tilde{O}(m/j)$, computing t many j -trees G_1, \dots, G_t with $j = \tilde{O}(m/t)$. Let α be the parameter specified in Theorem 8.5.

For each j -tree G_i , run Algorithm 4 with parameter $\alpha\Delta\phi$ on each of the j -trees. By Lemma 8.11, Algorithm 4 takes $O(m)$ time plus one call to \mathcal{A} for each of t many j -trees, which is a total of $\tilde{O}(tm) = \tilde{O}(m^2/j)$ time plus $\tilde{O}(m/j)$ calls to \mathcal{A} .

By property (2) of Theorem 8.5, there exists a j -tree G_i such that $|E_{G_i}(S^*, V \setminus S^*)| \leq \alpha|E_G(S^*, V \setminus S^*)|$, so $\sigma_{G_i}(S^*) \leq \alpha\sigma_G(S^*) = \alpha\Delta\phi$. By Lemma 8.14, Algorithm 4 returns a $(\alpha\Delta\phi, O(\Delta/c))$ -most-balanced $\max\{f(3\alpha\Delta\phi), 6\alpha\Delta\phi\}$ -sparse cut S for G_i .

Since $\text{vol}(S) \geq |S|$ and $\text{vol}(V \setminus S) \geq |V \setminus S| \geq |S|$, we have

$$\min\{\text{vol}(S), \text{vol}(V \setminus S)\} \geq |S|. \quad (33)$$

By property (1) of Theorem 8.5, this cut S satisfies $|E_G(S, V \setminus S)| \leq |E_{G_i}(S, V \setminus S)|$, which means that

$$\Phi_G(S) \stackrel{(33)}{\leq} \sigma_G(S) \leq \sigma_{G_i}(S) \leq \max\{f(3\alpha\Delta\phi), 6\phi\}.$$

By property (2) of most-balanced sparse cut (Definition 8.9), the set S^* with $\sigma_{G_i}(S^*) \leq \alpha\Delta\phi$ ensures that $|S| \geq |S^*|/O(\Delta c)$.

$$\min\{\text{vol}(S), \text{vol}(V \setminus S)\} \stackrel{(33)}{\geq} |S| \geq \frac{|S^*|}{O(\Delta c)} \geq \frac{\text{vol}(S^*)}{O(\Delta^2 c)}.$$

Thus, S is a $(\phi, O(\Delta^2 c))$ -most-balanced $\max\{f(3\alpha\Delta\phi), 6\alpha\Delta\phi\}$ -conductance cut. \square

Recall that $\alpha = O(\log^2 n \log \log n)$. By setting the parameter $k = n/j$, Lemma 8.15 says that given an $(f(\phi), c)$ -approximate balanced-cut routine with running time $T(m)$ on an input with n vertices and m edges, we can obtain an $(f(O(\phi \log^3 n)), O(c))$ -approximate balanced-cut routine on a graph with maximum degree $\Delta = O(1)$ with running time:

$$\tilde{O}\left(k\left(m + T\left(\frac{m}{k}, m\right)\right)\right).$$

We would have proven Theorem 2.8 if there is no restriction on the maximum degree $\Delta = O(1)$. Fortunately, the following lemma show that for the most balanced lower conductance cut problem, we can in fact assume with out loss of generality that $\Delta = O(1)$ (see Appendix C for the proof):

Lemma 8.16. *Given a graph G with n vertices and m edges, we can compute in linear time a graph G' such that*

1. G' has $O(m)$ vertices with constant maximum degree.
2. $\Phi(G) = \Phi(G')$.
3. *Given a (ϕ, c) -most balanced α -conductance cut in G' , we can transform it into a $(\phi, O(c))$ -most balanced $O(\alpha)$ -conductance cut in G in linear time.*

This allows us to invoke Lemma 8.15 with $\Delta = O(1)$, and thus obtaining the guarantees of Theorem 2.8.

9 Recursive Sparsification

Theorem 2.10. *Given any $(f(\phi), c)$ -approximate balanced-cut routine APPROXBALCUT in time m^θ for some $1 < \theta \leq 2$ such that $f(\phi) \leq \phi^\xi n^{o(1)}$ for some absolute constant $0 < \xi \leq 1$, we can obtain an $(n^{o(1)} \cdot f(\phi), c)$ -approximate balanced-cut routine with running time*

$$\widehat{O}\left(n^{2\theta-2}m^{2-\theta}\right) = \widehat{O}\left(n^2\right).$$

The general idea here is to incorporate one of the most well-known applications of graph partitioning: graph sparsification. This routine essentially allow one to transform any graph into a sparse one by repeatedly computing balanced separators on it, and then replacing the expanding pieces with expanders. Then we use another divide and conquer scheme to avoid calling sparsify on the initial, possibly dense, graph with m edges. Instead, we will partition the vertices into b equal sized parts, and recursively sparsify each of the $O(b^2)$ subgraphs on about $2n/b$ vertices. The resulting graphs are then combined with another call to sparsification. This scheme essentially trades the multiplicative accumulation of errors from repeatedly calling sparsification with the smaller sizes throughout these calls.

Definition 9.1. A weighted graph $H = (V, E^{(H)}, w^{(H)})$ is a κ -approximation of another weighted graph $G = (V, E^{(G)}, w^{(G)})$ on the same set of vertices V if for any cut $S \subseteq V$, we have

$$\frac{1}{\kappa} \cdot w^{(G)}\left(E^{(G)}(S, \overline{S})\right) \leq w^{(H)}\left(E^{(H)}(S, \overline{S})\right) \leq \kappa \cdot w^{(G)}\left(E^{(G)}(S, \overline{S})\right).$$

This notion is a simplified notion of graph sparsification, and we can show modify the existing sparsification literature to produce $n^{o(1)}$ -approximations deterministically, when given an approximate balanced cut procedure.

Lemma 9.2. *Given any $(f(\phi), \beta)$ -approximate balanced-cut routine APPROXBALCUT in time m^θ for some $1 < \theta \leq 2$ such that $f(\phi) \leq \phi^{-\xi} n^{o(1)}$ for some absolute constant $\xi > 0$ (as specified in Theorem 2.10),*

we can construct a deterministic sparsification algorithm DETERMINISTICSPARSIFY that takes any weighted graph G as input, and outputs in deterministic $\widehat{O}(m^\theta)$ time a sparse graph H with $\widehat{O}(n)$ edges that $n^{o(1)}$ -approximates G .

Proof. By the minimum spanning tree based hierarchical invocation given in the weighted sparsifier section of [ST11], it suffices to give such an algorithm for unweighted graphs.

On such graphs, the equivalence between finding approximate balanced cuts and almost-expanders [SW19] as stated in Theorem 6.6 means we also have a routine that either finds an 1/2-balanced cut, or a expander of size at least half the graph. Then by repeatedly invoking this partition routine, we obtain in $\widehat{O}(m^\theta)$ time a partition of the vertices into expanders with conductance at least $n^{-o(1)}$, so that at most

$$f(\phi) m \log n \leq \frac{m}{2}$$

edges are between the pieces. Repeating this process $O(\log n)$ iterations then puts all the edges into expanders, and thus gives a total number of vertices of $O(n \log^2 n)$.

Then the construction of weighted expanders from Appendix J of [KLP⁺16] gives that each of these expanders can be $n^{o(1)}$ -approximated by a graph with average degree $O(1)$. These constructions in turn rely on the explicit expander constructions by either Margulis [Mar88], or by Lubotzky, Phillips, and Sarnak [LPS88], both of which are deterministic. Such a replacement, however, incurs an error equaling to conductance (expanders have constant conductance), which in turn goes into the overall approximation factor. \square

This notion of approximation composes under summation of graphs, as well as compositions.

Fact 9.3. (see e.g. Section 2 of [KLP⁺16])

- If G_1 κ_1 -approximates H_1 , and G_2 κ_2 -approximates H_2 , then $G_1 + G_2$ $\max\{\kappa_1, \kappa_2\}$ -approximates $H_1 + H_2$.
- If G_1 κ_1 -approximates G_2 , and G_2 κ_2 -approximates G_3 , then G_1 $\kappa_1 \kappa_2$ -approximates G_3 .

Pseudocode of our routine is then given in Algorithm 6.

Algorithm 6 RECURSIVESPARSIFY(G)

- 1: Let m be the number of edges of G
 - 2: Let n be the number of vertices of G
 - 3: **if** $m \leq b \cdot n$ **then**
 - 4: Return DETERMINISTICSPARSIFY(G)
 - 5: **else**
 - 6: Partition $V(G)$ into b parts V_1, \dots, V_b such that their sizes differ by at most 1
 - 7: Decompose G into $\frac{b(b-1)}{2}$ subgraphs: $G_{i,j} = (V_i \cup V_j, E(G)(V_i, V_j))$
 - 8: **for** $1 \leq i \leq j \leq b$ **do**
 - 9: $H_{i,j} = \text{RECURSIVESPARSIFY}(G_{i,j})$
 - 10: Return DETERMINISTICSPARSIFY($\sum_{i,j} H_{i,j}$)
-

Proof of Theorem 2.10. We may assume that G is simple. Let n_0 be the number of vertices and edges in the original graph G_0 on which we call RECURSIVESPARSIFY (Algorithm 6). It suffices to show that Algorithm 6 runs in $O(n^{\frac{(1+c)(2\theta-2)}{c}} m^{2-\theta})$ time on any graph G with

n vertices and m edges such that $n \leq n_0$ if $b = 3n_0^{\frac{1}{c}}$ and returns a $n^{o(1)}$ approximation of G with $\widehat{O}(n)$ edges, since we can then call the given APPROXBALCUT routine on the returned graph.

The time cost of Line 6 and 7 and passing function arguments are bounded by $O(m) = O(n^{2\theta-2}m^{2-\theta})$. So we focus on bounding the total running time of recursive calls (Line 4, 9 and 10), denoted by $T(n, m)$. We will prove by induction that $T(n, m)$ is no more than $(nb)^{2\theta-2}m^{2-\theta}100^{\log_{b/3}(n)}$.

As base case, if $m \leq b \cdot n$, by Lemma 9.2, DETERMINISTICSPARSIFY computes an $n^{o(1)}$ -approximation of any graph in $\widehat{O}(m^\theta)$ time. So Algorithm 6 runs in m^θ time which is no more than $(nb)^{2\theta-2}m^{2-\theta}$.

Otherwise, $m > b \cdot n \geq 3n$. This implies $n \geq 6$.

If $m > b \cdot n$,

$$\begin{aligned}
T(n, m) &\leq (b^2(n/b))^\theta + \sum_{1 \leq i < j \leq b} T(2n/b + 1, m_{i,j}) 100^{\log_{b/3}(2n/b+1)} \\
&\leq (b^2(n/b))^\theta + \sum_{1 \leq i < j \leq b} (9n^{2\theta-2}m_{i,j}^{2-\theta}) 100^{\log_{b/3}(2n/b+1)} \\
&\quad (\text{by } ((2n/b + 1)b)^{2\theta-2} \leq (3n)^{2\theta-2}) \\
&\leq (b^2(n/b))^\theta + 9 \sum_{1 \leq i < j \leq b} (n^{2\theta-2}(2m/b/(b-1))^{2-\theta}) 100^{\log_{b/3}(2n/b+1)} \\
&= (b^2(n/b))^\theta + 9b^2(n^{2\theta-2}(2m/b/(b-1))^{2-\theta}) 100^{\log_{b/3}(2n/b+1)} \\
&\leq (b^2(n/b))^\theta + 36b^2(n^{2\theta-2}(m/(b^2))^{2-\theta}) 100^{\log_{b/3}(2n/b+1)} \\
&= (b^2(n/b))^\theta + 36b^{2\theta-2}(n^{2\theta-2}m^{2-\theta}) 100^{\log_{b/3}(2n/b+1)} \\
&\leq (b^2(n/b))^\theta + 36b^{2\theta-2}(n^{2\theta-2}m^{2-\theta}) 100^{-1+\log_{b/3}(n)} \\
&\leq (b^2(n/b))^\theta + 0.36b^{2\theta-2}n^{2\theta-2}m^{2-\theta} 100^{\log_{b/3}(n)} \\
&\leq b^{2\theta-2}n^{2\theta-2}m^{2-\theta} 100^{\log_{b/3}(n)}
\end{aligned}$$

for $n \geq 6$. The last inequality is by $(nb)^\theta < m^\theta = m^{\theta-1}m^{2-\theta} \leq n^{2\theta-2}m^{2-\theta}$.

The number of edges returned by Algorithm 6 is equal to that number of DETERMINISTICSPARSIFY, which is $\widehat{O}(n)$.

Since there are at most $\log_{b/3} n = c$ layers of recursion and each layer computes a $n^{o(1)}$ -approximation (by DETERMINISTICSPARSIFY) of the graph returned by the previous layer (Fact 9.3), Algorithm 6 returns a $(n^{o(1)})^c = n^{o(1)}$ -approximation of G .

Note however that this accumulation of errors is due to the approximation of a piece with ϕ conductance with a regular expander. We believe this lack of better deterministic approximations of expanders is an inherent gap in the construction of deterministic sparsification / partitioning tools. While it does not affect our overall final performances, it is a question worth investigation on its own.

Acknowledgement

This project has received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme under grant agreement No 715672 and 759557. Nanongkai was also partially supported by the Swedish Research Council (Reg. No. 2015-04659). Yu Gao was partially supported by the National Science Foundation under Grant No. 1718533.

A Notations

We use $G = (V, E)$ to denote an *undirected* graph, and $|V| = n$ and $|E| = m$ to denote the number of edges and vertices respectively. We assume that G is connected because otherwise there is a trivial separator of 0 vertices/edges. We also assume that G does not have parallel edges: otherwise, we can remove duplicate edges without changing vertex connectivity.

Definition A.1 (\deg, vol, N). For any vertex v on graph G , and any subset of vertex $U \subseteq V$,

- $\deg_G(v)$ = number of edges incident to v .
- $\text{vol}_G(U) = \sum_{v \in U} \deg_G(v)$.
- $N_G(v) = \{u: (u, v) \in E\}$, i.e., $N_G(v)$ is the set of neighbors of v .
- $N_G(U) = \bigcup_{v \in U} N_G(v) \setminus U$. Note that U is excluded.

We omit subscription when the graph that we refer to is clear from the context.

Definition A.2 (Subgraphs). For any set of vertices $U \subseteq V$, we denote $G[U]$ as an *induced* subgraph by U . For any vertex set U and edge set F , we denote

- $G - U = (V \setminus U, E)$, and
- $G - F = (V, E \setminus F)$

Definition A.3 (Edge-cuts and vertex-cuts). Let x, y be any distinct vertices. We call any edge-set $C \subset E$ (respectively any vertex-set $U \subset V$):

- an (x, y) -*edge-cut* (respectively an (x, y) -*vertex-cut*) if there is no path from x to y in $G - C$ (respectively if there is no path from x to y in $G - U$ and $x, y \notin U$),
- an *edge-cut* (respectively an *vertex-cut*) if it is an (s, t) -edge-cut (respectively (s, t) -vertex-cut) for some distinct vertices s and t .

Definition A.4 (Separation triple). A *separation triple* (L, S, R) is an order triplet of sets forming a partition of V where L and R are non-empty, and there is no edge between L and R .

Note that S is an (x, y) -vertex-cut for any $x \in L$ and $y \in R$.

Definition A.5 (Edge set). We denote $E(S, T) = \{(u, v): u \in S, v \in T, \text{ and } v \in E\}$.

Definition A.6 (Vertex connectivity κ). Vertex connectivity of a graph G , denoted as κ_G , is the minimum cardinality vertex-cut or $n - 1$ if no vertex-cut exists. For any vertices $x, y \in V$, we denote $\kappa_G(x, y)$ as the smallest cardinality (x, y) -vertex-cut or $n - 1$ if (x, y) -vertex-cut does not exist.

Observe that $\kappa_G = \min\{\kappa_G(x, y): x, y \in V, x \neq y\}$.

B Split Vertex Connectivity

Theorem B.1. *There is a deterministic SplitVC algorithm (Definition 5.3) that runs in $O(mk(|S| + k^2))$ time.*

We prove Theorem B.1 by giving an algorithm, and analyzing its correctness and running time.

B.1 Algorithm

Algorithm 7 SplitVC(G, S, k)

Input: Graph $G = (V, E)$, a vertex-cut S , and a positive integer k

Assumptions: $|S| \geq k$.

Output: An (x, y) -vertex-cut of size $< k$ for some $x \in S$ and $y \in S$ or the symbol \perp certifying that $\kappa_G(x, y) \geq k$ for all $x \in S$ and $y \in S$.

- 1: Let X be any subset of size k from S . $\triangleright X$ exists since $|S| \geq k$.
 - 2: **if** $\min_{x \in X, y \in X} \kappa_G(x, y) < k$ **then**
 - 3: **return** the corresponding (x, y) -vertex-cut in G .
 - 4: Let G' be a graph obtained from G by adding a new vertex s , and edges (s, v) for all $v \in X$.
 - 5: **if** $\min_{v \in S} \kappa_{G'}(s, v) < k$ **then**
 - 6: **return** A (u, v) -vertex-cut in G where $u \in S, v \in S$. \triangleright See Proposition B.2.
 - 7: **return** \perp .
-

B.2 Analysis

We show that Algorithm 7 is correct. Let X be the set as defined in Algorithm 7 (line 1). Recall that s is the new vertex in G' . Let $\kappa' = \min_{v \in S} \kappa_{G'}(s, v)$.

Proposition B.2. *If $\kappa' < k$, then the corresponding (s, v) -vertex-cut in G' is also a (u, v) -vertex-cut in G for some $u \in S$ and some $v \in S$.*

Proof. Let (L', S', R') be a separation triple such that $s \in L'$ and $|S'| = \kappa'$ and $v \in R' \cap S$ (such separation triple exists by Algorithm 7 line 5). Since $s \in L'$ and there cannot be an edge between L' and R' , we have $N_{G'}(s) \subseteq L' \sqcup S'$. Since $|S'| < k$, but $|N_{G'}(s)| = |X| = k$, there is some vertex u in X that is also in L' . That is, $L' \setminus \{s\} \neq \emptyset$. Also, R' contains a vertex $v \in S$. Hence, we get a new separation triple in G by removing s from L' . Therefore, S' is a (u, v) -vertex-cut in G where $u \in S$ and $v \in S$. \square

Lemma B.3. *Suppose there exist x and y such that $x \in S, y \in S$ and $\kappa_G(x, y) < k$. Then, Algorithm 7 (line 3 or line 6) returns a (u, v) -vertex-cut of size at most k where $u \in S$ and $v \in S$.*

Proof. Let (L^*, S^*, R^*) be a separation triple such that $x \in L^*$ and $y \in R^*$ and $|S^*| = \kappa_G(x, y)$. We have that $S \setminus S^*$ has two components $S \cap L^*$ and $S \cap R^*$.

If $X \cap L^* \neq \emptyset$ and $X \cap R^* \neq \emptyset$, then there exist $u \in X \cap L^*$ and $v \in X \cap R^*$. Hence, $u \in L^*$ and $v \in R^*$. Therefore, $\kappa_G(u, v) = |S^*| < k$. Since $u \in X$ and $v \in X$, Algorithm 7 (line 3) returns a vertex-cut of size at most k .

Otherwise, $X \cap L^* = \emptyset$ or $X \cap R^* = \emptyset$. Since $|S^*| < k$, and $|X| = k$, either $X \cap L^* = \emptyset$ or $X \cap R^* = \emptyset$. Now, we assume WLOG that $X \cap R^* = \emptyset$. This means $X \subseteq L^* \sqcup S^*$. Let G' be the graph as defined in Algorithm 7 (line 4). Let $\kappa' = \min_{v \in S} \kappa_{G'}(s, v)$.

We claim that $\kappa' \leq \kappa_G(x, y)$. Recall that (L^*, S^*, R^*) is a separation triple such that $x \in S \cap L^*$, $y \in S \cap R^*$ and $|S^*| = \kappa_G(x, y)$. We show that S^* is an (s, y) -vertex-cut in G' . Note that s is a new vertex in G' , and $y \in S$. Since $N_{G'}(s) = X \subseteq L^* \sqcup S^*$, the new edges do not join L^* and R^* . Also, $y \in R^*$. Hence, $(L^* \cup \{s\}, S^*, R^*)$ is a separation triple in G' where s and y belong to different partitions. Therefore, S^* is an (s, y) -vertex-cut in G' , and we have $\kappa_{G'}(s, y) \leq |S^*| = \kappa_G(x, y)$. Therefore, $\kappa' \leq \kappa_G(x, y) < k$.

Therefore, by Proposition B.2, Algorithm 7(line 6) outputs correctly a (u, v) -vertex-cut in G of size $< k$ where $u \in S$ and $v \in S$. □

We show the last part.

Lemma B.4. *Suppose $\kappa_G(x, y) \geq k$ for all $x \in S$ and $y \in S$. Algorithm 7 returns the symbol \perp at line 7.*

Proof. Clearly, Algorithm 7 never returns a vertex-cut at line 3. Let $\kappa' = \min_{v \in S} \kappa_{G'}(s, v)$. It remains to show that $\kappa' \geq k$. Suppose $\kappa' < k$. Let S' be the corresponding (s, v) -vertex-cut in G' where $v \in S$. By Proposition B.2, S' is also a (u, v) -vertex-cut in G where $u \in S$ and $v \in S$. Therefore, $\kappa_G(u, v) < k$, which is a contradiction. Therefore, Algorithm 7 never returns a vertex-cut at line 6, and correctly returns the symbol \perp at line 7. □

Lemma B.5. *Algorithm 7 terminates in $O(mk(|S| + k^2))$ time.*

Proof. Given x, y , we can compute an (x, y) -vertex-cut such that $\kappa_G(x, y) < k$ or certify that $\kappa_G(x, y) \geq k$ in $O(mk)$ time using Ford-Fulkerson algorithm. We run at most $|X|^2 = k^2$ calls of $\kappa(x, y)$ at line 2, and at most $|S|$ calls of $\kappa(x, y)$ at line 5. Each call of $\kappa(x, y)$ takes $O(mk)$. Therefore, the running time for Algorithm 7 follows. □

Proof of Theorem B.1. This follows from Algorithm 7 is correct by Lemma B.3, and Lemma B.4 for the two possible cases. The running time follows from Lemma B.5. □

C Expander Split

Definition C.1 (Expander Split). Let $G = (V, E)$ be a graph. The *expander split* graph G' of G is obtained from G by the following operations

- For each node $u \in V$, we replace u by a constant-degree expander X_u with $\deg(u)$ nodes. We call X_u a *super-node* in G' .
- Let $E_u = \{e_{u,1}, \dots, e_{u,\deg(u)}\}$ denote the set of edges in G incident to u . For each $e = (u, v)$, suppose $e = e_{u,i} = e_{v,j}$, we create add an edge between the i -th of node X_u and the j -th node of X_v .

Proposition C.2. *For any m -edge graph $G = (V, E)$, the expander split graph $G' = (V', E')$ of G has the following properties*

1. G' has $O(m)$ vertices with constant maximum degree, and can be obtained from G in $O(m)$ time.
2. $\Phi_{G'} = \Theta(\Phi_G)$.
3. Given a β -balanced cut S in G' where $\Phi_{G'}(S) \leq \epsilon$ for some small enough constant $\epsilon < 1$, then we can obtain in $O(m)$ time a $\Omega(\beta)$ -balanced cut T in G where $\Phi_G(T) = O(\Phi_{G'}(S))$.

Proposition C.2 allows us to assume that we only work with a graph with constant degree.

C.1 Proof of Proposition C.2

We prove Proposition C.2 here. This part should be skipped in the first read.

Proposition C.3. *[Fast explicit expanders] Given any number n , there is a deterministic algorithm with running time $O(n)$ that constructs a graph H_n with n vertices such that each vertex has degree at most 16, and the conductance $\Phi_{H_n} = \Omega(1)$.*

Proof. We assume that $n \geq 10$, otherwise H_n can be constructed in constant time. The expander construction by Margulis, Gabber and Galil is as follows. For any number k , the H'_{k^2} is a vertex set $\mathbb{Z}_k \times \mathbb{Z}_k$ where $\mathbb{Z}_k = \mathbb{Z}/k\mathbb{Z}$. For each vertex $(x, y) \in \mathbb{Z}_k \times \mathbb{Z}_k$, its eight adjacent vertices are $(x \pm 2y, y)$, $(x \pm (2y + 1), y)$, $(x, y \pm 2x)$, $(x, y \pm (2x + 1))$. In [GG81], it is shown that $\Phi_{H'_{k^2}} = \Omega(1)$.

Let k be such that $(k - 1)^2 < n \leq k^2$. As $n \geq 10$, so $k \geq 4$, and so $(k - 1)^2 \geq k^2/2$. So we can contract disjoint pairs of vertices in H'_{k^2} and obtain a graph H_n with n nodes where each node has degree between 8 and 16. Note that $\Phi_{H_n} \geq \Phi_{H'_{k^2}}$. It is clear that the construction takes $O(n)$ time. \square

Let $\mathcal{P} = \{V_1, \dots, V_k\}$ be a partition of V . We say that a cut S respects \mathcal{P} if for each i , either $V_i \subseteq S$ or $V_i \cap S = \emptyset$ (i.e. no overlapping). Let $\Phi_G^{out} = \min_{S \text{ respects } \mathcal{P}} \Phi_G(S)$. Let $\Phi_G^{in} = \min_i \Phi_{G[V_i]}$. We say that V_i is a *clump* if, for each $u \in V_i$, $\deg_{G[V_i]}(u) = \Theta(\deg_G(u))$. In particular, for every $S \subset V_i$, we have $\text{vol}_{G[V_i]}(S) = \Theta(\text{vol}_G(S))$.

Lemma C.4. *Suppose that $\mathcal{P} = \{V_1, \dots, V_k\}$ is a partition of V where each V_i is a clump. We have*

1. $\Phi_G = \Omega(\Phi_G^{out} \cdot \Phi_G^{in})$.
2. Given a β -balanced cut S where $\Phi_G(S) \leq \epsilon \Phi_G^{in}$ for some small enough constant $\epsilon < 1$, then we can obtain in $O(\text{vol}_G(V))$ time a $\Omega(\beta)$ -balanced cut T respecting where $\Phi_G(T) = O(\Phi_G(S)/\Phi_G^{in})$.

Proof. Below, we write $a \lesssim b$ to denote $a = O(b)$. Consider any β -balanced cut $(S, V - S)$ in G where $\text{vol}_G(S) \leq \text{vol}_G(V - S)$. We will prove that either 1) $\Phi_G(S) = \Omega(\Phi_G^{in})$, otherwise we can obtain in $O(\text{vol}_G(V))$ time a $\Omega(\beta)$ -balanced cut $(T, V - T)$ respecting \mathcal{P} such that $\Phi_G(T) = O(\Phi_G(S)/\Phi_G^{in})$. Observe that this implies both the first part of the lemma, i.e. $\Phi_G = \Omega(\Phi_G^{out} \cdot \Phi_G^{in})$, and also the second part.

Let $\mathcal{P}' = \{V_i \mid 0 < \text{vol}_G(S \cap V_i) < 2 \text{vol}_G(V_i - S)\}$ and $\mathcal{P}'' = \{V_i \mid \text{vol}_G(S \cap V_i) > 2 \text{vol}_G(V_i - S)\}$. Note that as V_i is a clump, $\text{vol}_{G[V_i]}(S \cap V_i) = \Theta(\text{vol}_G(S \cap V_i))$ and $\text{vol}_{G[V_i]}(V_i - S) = \Theta(\text{vol}_G(V_i - S))$.

So $\delta_{G[V_i]}(V_i \cap S) \geq \Omega(\Phi_G^{in} \cdot \text{vol}_{G[V_i]}(V_i \cap S))$ for each $V_i \in \mathcal{P}'$ and $\delta_{G[V_i]}(V_i - S) \geq \Omega(\Phi_G^{in} \cdot \text{vol}_{G[V_i]}(V_i - S))$ for each $V_i \in \mathcal{P}''$. Let $T = \bigcup_{V_i \in \mathcal{P}''} V_i$, $\bar{T} = V - T$ and $\bar{S} = V - S$. There are two cases.

In the first case, suppose $\text{vol}_G(S - T) \geq \text{vol}_G(S)/2$. Then, we have

$$\begin{aligned}
\delta_G(S) &\geq \sum_{V_i \in \mathcal{P}'} \delta_{G[V_i]}(S \cap V_i). \\
&\geq \Omega(\Phi_G^{in}) \cdot \sum_{V_i \in \mathcal{P}'} \text{vol}_{G[V_i]}(S \cap V_i) \\
&\geq \Omega(\Phi_G^{in}) \cdot \sum_{V_i \in \mathcal{P}'} \text{vol}_G(S \cap V_i) \\
&= \Omega(\Phi_G^{in}) \cdot \text{vol}_G(S - T) \\
&\geq \Omega(\Phi_G^{in}) \cdot \text{vol}_G(S)/2
\end{aligned}$$

So $\Phi_G(S) = \Omega(\Phi_G^{in})$.

In the second case, suppose $\text{vol}_G(S - T) \leq \epsilon \text{vol}_G(S)$. We will show that (1) $\delta_G(T) = O(\delta_G(S)/\Phi_G^{in})$, (2) $\text{vol}_G(T) = \Omega(\text{vol}_G(S))$, and (3) $\text{vol}_G(\bar{T}) = \Omega(\text{vol}_G(\bar{S}))$. This would imply

$$\begin{aligned}
\Phi_G(T) &= \frac{\delta_G(T)}{\min\{\text{vol}_G(T), \text{vol}_G(\bar{T})\}} \\
&\lesssim \frac{\delta_G(S)/\Phi_G^{in}}{\min\{\text{vol}_G(S), \text{vol}_G(\bar{S})\}} \\
&= \Phi_G(S)/\Phi_G^{in}.
\end{aligned}$$

and that T is a $\Omega(\beta)$ -balanced cut. Now, it remains to prove the three claims.

Claim C.5. *We have the following:*

- $\delta_G(T) = O(\delta_G(S)/\Phi_G^{in})$,
- $\text{vol}_G(S) = O(\text{vol}_G(T))$, and
- $\text{vol}_G(\bar{S}) = O(\text{vol}_G(\bar{T}))$.

Proof. It is convenient to bound $\text{vol}_G(T - S)$ and $\text{vol}_G(S - T)$ first. We have

$$\begin{aligned}
\text{vol}_G(T - S) &= \sum_{V_i \in \mathcal{P}''} \text{vol}_G(V_i - S) \\
&\lesssim \sum_{V_i \in \mathcal{P}''} \text{vol}_{G[V_i]}(V_i - S) \\
&\lesssim \sum_{V_i \in \mathcal{P}''} \delta_{G[V_i]}(V_i - S)/\Phi_G^{in} \\
&\leq \delta_G(V - S)/\Phi_G^{in} = \delta_G(S)/\Phi_G^{in}.
\end{aligned}$$

Next,

$$\begin{aligned}
\text{vol}_G(S - T) &= \sum_{V_i \in \mathcal{P}'} \text{vol}_G(S \cap V_i) \\
&\lesssim \sum_{V_i \in \mathcal{P}'} \text{vol}_{G[V_i]}(S \cap V_i) \\
&\lesssim \sum_{V_i \in \mathcal{P}'} \delta_{G[V_i]}(S) / \Phi_G^{\text{in}} \\
&\leq \delta_G(S) / \Phi_G^{\text{in}}.
\end{aligned}$$

Both of the two bounds above exploit the fact that V_i is a clump. From this, we obtain the first part of the claim:

$$\begin{aligned}
\delta_G(T) &\leq \delta_G(S) + \text{vol}_G(T - S) + \text{vol}_G(S - T) \\
&= O(\delta_G(S) / \Phi_G^{\text{in}}).
\end{aligned}$$

For the second part, we have

$$\begin{aligned}
\text{vol}_G(S) &\leq \text{vol}_G(T) + \text{vol}_G(S - T) \\
&\leq \text{vol}_G(T) + \text{vol}_G(S) / 2
\end{aligned}$$

and so $\text{vol}_G(S) = O(\text{vol}_G(T))$. For the last part, first observe that

$$\begin{aligned}
\text{vol}_G(T - S) &= \sum_{V_i \in \mathcal{P}''} \text{vol}_G(V_i - S) \\
&< \sum_{V_i \in \mathcal{P}''} \text{vol}_G(V_i \cap S) / 2 \\
&= \text{vol}_G(T \cap S) / 2.
\end{aligned}$$

So we have

$$\begin{aligned}
\text{vol}_{G'}(\bar{S}) &= \text{vol}_G(\bar{T}) + \text{vol}_G(T - S) \\
&< \text{vol}_G(\bar{T}) + \text{vol}_G(T \cap S) / 2 \\
&\leq \text{vol}_G(\bar{T}) + \text{vol}_G(S) / 2 \\
&\leq \text{vol}_G(\bar{T}) + \text{vol}_G(\bar{S}) / 2,
\end{aligned}$$

and so $\text{vol}_G(\bar{S}) = O(\text{vol}_G(\bar{T}))$. □

□

Now we are ready to prove Proposition [C.2](#).

Proof of Proposition [C.2](#). For 1), property follow immediately from the definition of expander split graph and Proposition [C.3](#). For 2), $\Phi_{G'} \leq \Phi_G$ by the construction. To show that $\Phi_{G'} = \Omega(\Phi_G)$, let $\mathcal{P} = \{X_u\}_{u \in V}$ be a partition of V' . For any cut S' in G' respecting \mathcal{P} , there

is a corresponding cut S in G . Note that $\delta_{G'}(S') = \delta_G(S)$ and $\text{vol}_{G'}(S') = \Theta(\text{vol}_G(S))$. So $\Phi_{G'}^{\text{out}} = \Theta(\Phi_G)$. By Proposition C.3, $\Phi_{G'}^{\text{in}} = \Theta(1)$. Note that each node u in G' is such that $\text{deg}_{G'}(u) = \Theta(\text{deg}_{X_u}(u))$. In particular, each super-node X_u is a clump in G' . By Lemma C.4 we have $\Phi_{G'} = \Omega(\Phi_{G'}^{\text{out}}\Phi_G^{\text{in}}) = \Omega(\Phi_G)$. For 3), this follows from Lemma C.4 as well. \square

References

- [ABS15] Sanjeev Arora, Boaz Barak, and David Steurer. Subexponential algorithms for unique games and related problems. *J. ACM*, 62(5):42:1–42:25, 2015. 1
- [ACL06] Reid Andersen, Fan R. K. Chung, and Kevin J. Lang. Local graph partitioning using pagerank vectors. In *FOCS*, pages 475–486. IEEE Computer Society, 2006. 2, 3, 7, 10, 11, 35, 36, 37, 38, 43
- [ACL08] Reid Andersen, Fan R. K. Chung, and Kevin J. Lang. Local partitioning for directed graphs using pagerank. *Internet Mathematics*, 5(1):3–22, 2008. 3
- [AHU76] Alfred V Aho, John E Hopcroft, and Jeffrey D Ullman. On finding lowest common ancestors in trees. *SIAM Journal on computing*, 5(1):115–132, 1976. 48
- [AK16] Sanjeev Arora and Satyen Kale. A combinatorial, primal-dual approach to semidefinite programs. *J. ACM*, 63(2):12:1–12:35, 2016. 3
- [AL08] Reid Andersen and Kevin J. Lang. An algorithm for improving graph partitions. In *SODA*, pages 651–660. SIAM, 2008. 3
- [Alo86] Noga Alon. Eigenvalues and expanders. *Combinatorica*, 6(2):83–96, 1986. 2, 3, 6, 10, 11
- [AP09] Reid Andersen and Yuval Peres. Finding sparse cuts locally using evolving sets. In *STOC*, pages 235–244. ACM, 2009. 3
- [ARV09] Sanjeev Arora, Satish Rao, and Umesh V. Vazirani. Expander flows, geometric embeddings and graph partitioning. *J. ACM*, 56(2):5:1–5:37, 2009. 3
- [BDD⁺82] Michael Becker, W. Degenhardt, Jürgen Doenhardt, Stefan Hertel, Gerd Kaninke, W. Kerber, Kurt Mehlhorn, Stefan Näher, Hans Rohnert, and Thomas Winter. A probabilistic algorithm for vertex connectivity of graphs. *Inf. Process. Lett.*, 15(3):135–136, 1982. 1
- [BFNW91] Laszlo Babai, Lance Fortnow, Noam Nisan, and Avi Wigderson. BPP has subexponential time simulations unless EXPTIME has publishable proofs. In *[1991] Proceedings of the Sixth Annual Structure in Complexity Theory Conference*, pages 213–219. IEEE, 1991. 10
- [BMS⁺16] Aydin Buluc, Henning Meyerhenke, Ilya Safro, Peter Sanders, and Christian Schulz. Recent advances in graph partitioning. In *Algorithm Engineering*, pages 117–158. Springer, 2016. 1

- [BVZ99] Yuri Boykov, Olga Veksler, and Ramin Zabih. Fast approximate energy minimization via graph cuts. In *Proceedings of the Seventh IEEE International Conference on Computer Vision*, volume 1, pages 377–384. IEEE, 1999. [1](#)
- [CGL⁺19] Julia Chuzhoy, Yu Gao, Jason Li, Danupon Nanongkai, Richard Peng, and Thatchaphol Saranurak. A deterministic algorithm for balanced cut with applications to dynamic connectivity, flows, and beyond. *CoRR*, abs/1910.08025, 2019. Available at: <https://arxiv.org/abs/1910.08025>. [4](#)
- [CHI⁺17] Shiri Chechik, Thomas Dueholm Hansen, Giuseppe F. Italiano, Veronika Loitzenbauer, and Nikos Parotsidis. Faster algorithms for computing maximal 2-connected subgraphs in sparse directed graphs. In *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2017, Barcelona, Spain, Hotel Porta Fira, January 16-19*, pages 1900–1918, 2017. [4](#), [5](#), [18](#), [19](#)
- [CIS18] Marco L. Carmosino, Russell Impagliazzo, and Manuel Sabin. Fine-grained derandomization: From problem-centric to resource-centric complexity. In *45th International Colloquium on Automata, Languages, and Programming, ICALP 2018, July 9-13, 2018, Prague, Czech Republic*, pages 27:1–27:16, 2018. [1](#), [10](#)
- [CMP16] Michael B. Cohen, Cameron Musco, and Jakub W. Pachocki. Online row sampling. In *Approximation, Randomization, and Combinatorial Optimization. Algorithms and Techniques, APPROX/RANDOM 2016, September 7-9, 2016, Paris, France*, pages 7:1–7:18, 2016. [1](#)
- [CR94] Joseph Cheriyan and John H. Reif. Directed s - t numberings, rubber bands, and testing digraph k -vertex connectivity. *Combinatorica*, 14(4):435–451, 1994. Announced at SODA’92. [1](#)
- [CT91] Joseph Cheriyan and Ramakrishna Thurimella. Algorithms for parallel k -vertex connectivity and sparse certificates (extended abstract). In *STOC*, pages 391–401. ACM, 1991. [1](#)
- [DHNS19] Mohit Daga, Monika Henzinger, Danupon Nanongkai, and Thatchaphol Saranurak. Distributed edge connectivity in sublinear time. In *STOC*, pages 343–354. ACM, 2019. [1](#)
- [DKP⁺17] David Durfee, Rasmus Kyng, John Peebles, Anup B Rao, and Sushant Sachdeva. Sampling random spanning trees faster than matrix multiplication. In *Proceedings of the 49th Annual ACM SIGACT Symposium on Theory of Computing*, pages 730–742. ACM, 2017. [8](#)
- [EEST08] Michael Elkin, Yuval Emek, Daniel A. Spielman, and Shang-Hua Teng. Lower-stretch spanning trees. *SIAM J. Comput.*, 38(2):608–628, 2008. [47](#)
- [EGIN97] David Eppstein, Zvi Galil, Giuseppe F. Italiano, and Amnon Nissenzweig. Sparsification - a technique for speeding up dynamic graph algorithms. *J. ACM*, 44(5):669–696, 1997. Announced at FOCS 1992. [2](#)

- [EH84] Abdol-Hossein Esfahanian and S. Louis Hakimi. On computing the connectivities of graphs and digraphs. *Networks*, 14(2):355–366, 1984. [1](#)
- [ET75] Shimon Even and Robert Endre Tarjan. Network flow and testing graph connectivity. *SIAM J. Comput.*, 4(4):507–518, 1975. [1](#), [5](#)
- [Eve75] Shimon Even. An algorithm for determining whether the connectivity of a graph is at least k . *SIAM J. Comput.*, 4(3):393–396, 1975. [1](#), [2](#)
- [FM95] Tomás Feder and Rajeev Motwani. Clique partitions, graph compression and speeding-up algorithms. *J. Comput. Syst. Sci.*, 51(2):261–272, 1995. Announced at STOC’91. [2](#)
- [FMP⁺18] Matthew Fahrbach, Gary L. Miller, Richard Peng, Saurabh Sawlani, Junxing Wang, and Shen Chen Xu. Graph sketching against adaptive adversaries applied to the minimum degree algorithm. In *59th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2018, Paris, France, October 7-9, 2018*, pages 101–112, 2018. [1](#)
- [Fre85] Greg N. Frederickson. Data structures for on-line updating of minimum spanning trees, with applications. *SIAM J. Comput.*, 14(4):781–798, 1985. Announced at STOC’83. [2](#)
- [FY19] Sebastian Forster and Liu Yang. A faster local algorithm for detecting bounded-size cuts with applications to higher-connectivity problems. *CoRR*, abs/1904.08382, 2019. [1](#)
- [Gab06] Harold N. Gabow. Using expander graphs to find vertex connectivity. *J. ACM*, 53(5):800–844, 2006. Announced at FOCS’00. [1](#), [2](#), [29](#)
- [Gal80] Zvi Galil. Finding the vertex connectivity of graphs. *SIAM J. Comput.*, 9(1):197–199, 1980. [1](#)
- [GG81] Ofer Gabber and Zvi Galil. Explicit constructions of linear-sized superconcentrators. *J. Comput. Syst. Sci.*, 22(3):407–420, 1981. announced at FOCS’79. [60](#)
- [GHT18] Gramoz Goranci, Monika Henzinger, and Mikkel Thorup. Incremental exact min-cut in polylogarithmic amortized update time. *ACM Trans. Algorithms*, 14(2):17:1–17:21, 2018. [1](#)
- [GR98] Andrew V. Goldberg and Satish Rao. Beyond the flow decomposition barrier. *J. ACM*, 45(5):783–797, 1998. [32](#)
- [Hen97] Monika Rauch Henzinger. A static 2-approximation algorithm for vertex connectivity and incremental approximation algorithms for edge and vertex connectivity. *J. Algorithms*, 24(1):194–220, 1997. [1](#)
- [HRG96] Monika Rauch Henzinger, Satish Rao, and Harold N. Gabow. Computing vertex connectivity: New bounds from old techniques. In *37th Annual Symposium on Foundations of Computer Science, FOCS ’96, Burlington, Vermont, USA, 14-16 October, 1996*, pages 462–471, 1996. [10](#)

- [HRG00] Monika Rauch Henzinger, Satish Rao, and Harold N. Gabow. Computing vertex connectivity: New bounds from old techniques. *J. Algorithms*, 34(2):222–250, 2000. Announced at FOCS’96. [1](#), [2](#)
- [HRW17] Monika Henzinger, Satish Rao, and Di Wang. Local flow partitioning for faster edge connectivity. In *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2017, Barcelona, Spain, Hotel Porta Fira, January 16-19*, pages 1919–1938, 2017. [1](#), [10](#)
- [HT73] John E. Hopcroft and Robert Endre Tarjan. Dividing a graph into triconnected components. *SIAM J. Comput.*, 2(3):135–158, 1973. [1](#), [2](#), [10](#)
- [IW97] Russell Impagliazzo and Avi Wigderson. P= BPP if E requires exponential circuits: derandomizing the XOR lemma. In *Proceedings of the twenty-ninth annual ACM symposium on Theory of computing*, pages 220–229. ACM, 1997. [10](#)
- [JS88] Mark Jerrum and Alistair Sinclair. Conductance and the rapid mixing property for markov chains: the approximation of the permanent resolved (preliminary version). In *Proceedings of the 20th Annual ACM Symposium on Theory of Computing, May 2-4, 1988, Chicago, Illinois, USA*, pages 235–244, 1988. [11](#)
- [Kar00] David R Karger. Minimum cuts in near-linear time. *Journal of the ACM (JACM)*, 47(1):46–76, 2000. Available at <http://arxiv.org/abs/cs/9812007>. [1](#)
- [KKOV07] Rohit Khandekar, Subhash Khot, Lorenzo Orecchia, and Nisheeth K. Vishnoi. On a cut-matching game for the sparsest cut problem. 2007. [3](#), [4](#), [7](#), [30](#), [33](#), [34](#)
- [KKT95] David R Karger, Philip N Klein, and Robert E Tarjan. A randomized linear-time algorithm to find minimum spanning trees. *Journal of the ACM (JACM)*, 42(2):321–328, 1995. [1](#)
- [KL13] Jonathan A. Kelner and Alex Levin. Spectral sparsification in the semi-streaming setting. *Theory Comput. Syst.*, 53(2):243–262, 2013. [1](#)
- [Kle69] D Kleitman. Methods for investigating connectivity of large graphs. *IEEE Transactions on Circuit Theory*, 16(2):232–233, 1969. [1](#), [2](#), [10](#)
- [KLOS14] Jonathan A. Kelner, Yin Tat Lee, Lorenzo Orecchia, and Aaron Sidford. An almost-linear-time algorithm for approximate max flow in undirected graphs, and its multicommodity generalizations. In *Proceedings of the Twenty-Fifth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2014, Portland, Oregon, USA, January 5-7, 2014*, pages 217–226, 2014. Available at <http://arxiv.org/abs/1304.2338>. [1](#), [2](#), [10](#)
- [KLP⁺16] Rasmus Kyng, Yin Tat Lee, Richard Peng, Sushant Sachdeva, and Daniel A Spielman. Sparsified cholesky and multigrid solvers for connection laplacians. In *Proceedings of the 48th Annual ACM SIGACT Symposium on Theory of Computing*, pages 842–850. ACM, 2016. Available at <http://arxiv.org/abs/1512.01892>. [55](#)

- [KPPS17] Rasmus Kyng, Jakub Pachocki, Richard Peng, and Sushant Sachdeva. A framework for analyzing resparsification algorithms. In *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2017, Barcelona, Spain, Hotel Porta Fira, January 16-19*, pages 2032–2043, 2017. [1](#)
- [KR87] Arkady Kanevsky and Vijaya Ramachandran. Improved algorithms for graph four-connectivity. In *FOCS*, pages 252–259. IEEE Computer Society, 1987. [10](#)
- [KRV09] Rohit Khandekar, Satish Rao, and Umesh V. Vazirani. Graph partitioning using single commodity flows. *J. ACM*, 56(4):19:1–19:15, 2009. [2](#), [3](#), [7](#), [10](#), [30](#)
- [KS16] Rasmus Kyng and Sushant Sachdeva. Approximate gaussian elimination for laplacians - fast, sparse, and simple. In *IEEE 57th Annual Symposium on Foundations of Computer Science, FOCS 2016, 9-11 October 2016, Hyatt Regency, New Brunswick, New Jersey, USA*, pages 573–582, 2016. Available at <http://arxiv.org/abs/1605.02353>. [1](#)
- [KT19] Ken-ichi Kawarabayashi and Mikkel Thorup. Deterministic edge connectivity in near-linear time. *J. ACM*, 66(1):4:1–4:50, 2019. Announced at STOC’15. [1](#), [10](#), [36](#), [37](#), [38](#), [39](#)
- [LLW86] Nathan Linial, Laszlo Lovasz, and Avi Wigderson. A physical interpretation of graph connectivity, and its algorithmic applications. In *27th Annual Symposium on Foundations of Computer Science, Toronto, Canada, 27-29 October 1986*, pages 39–48, 1986. [10](#)
- [LLW88] Nathan Linial, László Lovász, and Avi Wigderson. Rubber bands, convex embeddings and graph connectivity. *Combinatorica*, 8(1):91–102, 1988. Announced at FOCS’86. [1](#)
- [LPS88] Alexander Lubotzky, Ralph Phillips, and Peter Sarnak. Ramanujan graphs. *Combinatorica*, 8(3):261–277, 1988. [55](#)
- [LR99] Frank Thomson Leighton and Satish Rao. Multicommodity max-flow min-cut theorems and their use in designing approximation algorithms. *J. ACM*, 46(6):787–832, 1999. [3](#), [6](#)
- [LST18] On-Hei Solomon Lo, Jens M. Schmidt, and Mikkel Thorup. Contraction-based sparsification in near-linear time. *CoRR*, abs/1810.03865, 2018. [1](#)
- [Mad10] Aleksander Madry. Fast approximation algorithms for cut-based problems in undirected graphs. In *51th Annual IEEE Symposium on Foundations of Computer Science, FOCS 2010, October 23-26, 2010, Las Vegas, Nevada, USA*, pages 245–254, 2010. [1](#), [4](#), [7](#), [8](#), [46](#), [47](#)
- [Mar88] Grigorii Aleksandrovich Margulis. Explicit group-theoretical constructions of combinatorial schemes and their application to the design of expanders and concentrators. *Problemy peredachi informatsii*, 24(1):51–60, 1988. [55](#)

- [Mat87] David W. Matula. Determining edge connectivity in $o(nm)$. In *FOCS*, pages 249–251. IEEE Computer Society, 1987. [1](#)
- [MRSV17] Jack Murtagh, Omer Reingold, Aaron Sidford, and Salil P. Vadhan. Derandomization beyond connectivity: Undirected laplacian systems in nearly logarithmic space. In *58th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2017, Berkeley, CA, USA, October 15-17, 2017*, pages 801–812, 2017. [10](#)
- [NI92] Hiroshi Nagamochi and Toshihide Ibaraki. A linear-time algorithm for finding a sparse k -connected spanning subgraph of a k -connected graph. *Algorithmica*, 7(5&6):583–596, 1992. [1](#), [10](#), [12](#)
- [NS17] Danupon Nanongkai and Thatchaphol Saranurak. Dynamic spanning forest with worst-case update time: adaptive, las vegas, and $o(n^{1/2 - \epsilon})$ -time. In *STOC*, pages 1122–1129. ACM, 2017. [1](#), [2](#), [31](#), [33](#)
- [NSW17] Danupon Nanongkai, Thatchaphol Saranurak, and Christian Wulff-Nilsen. Dynamic minimum spanning forest with subpolynomial worst-case update time. In *FOCS*, pages 950–961. IEEE Computer Society, 2017. [1](#), [2](#)
- [NSY19a] Danupon Nanongkai, Thatchaphol Saranurak, and Sorrachai Yingchareonthawornchai. Breaking quadratic time for small vertex connectivity and an approximation scheme. To appear at STOC’19, 2019. [1](#), [4](#), [5](#), [10](#), [18](#), [19](#), [32](#)
- [NSY19b] Danupon Nanongkai, Thatchaphol Saranurak, and Sorrachai Yingchareonthawornchai. Computing and testing small vertex connectivity in near-linear time and queries. *CoRR*, abs/1905.05329, 2019. [1](#), [10](#)
- [NW94] Noam Nisan and Avi Wigderson. Hardness vs randomness. *Journal of computer and System Sciences*, 49(2):149–167, 1994. [1](#), [10](#)
- [OSV12] Lorenzo Orecchia, Sushant Sachdeva, and Nisheeth K. Vishnoi. Approximating the exponential, the lanczos method and an $\tilde{O}(m)$ -time spectral algorithm for balanced separator. In *STOC*, pages 1141–1160. ACM, 2012. [2](#), [6](#), [10](#)
- [OV11] Lorenzo Orecchia and Nisheeth K. Vishnoi. Towards an sdp-based approach to spectral methods: A nearly-linear-time algorithm for graph partitioning and decomposition. In *SODA*, pages 532–545. SIAM, 2011. [2](#), [10](#)
- [PC99] Victor Y. Pan and Zhao Q. Chen. The complexity of the matrix eigenproblem. In *Proceedings of the Thirty-First Annual ACM Symposium on Theory of Computing, May 1-4, 1999, Atlanta, Georgia, USA*, pages 507–516, 1999. [2](#), [11](#)
- [Pen16] Richard Peng. Approximate undirected maximum flows in $O(m \text{polylog}(n))$ time. In *SODA*, pages 1862–1867. SIAM, 2016. [2](#), [3](#), [10](#), [11](#)
- [Pod73] VD Podderugin. An algorithm for finding the edge connectivity of graphs. *Vopr. Kibern.*, 2:136, 1973. [1](#)

- [Rei08] Omer Reingold. Undirected connectivity in log-space. *J. ACM*, 55(4):17:1–17:24, 2008. **10**
- [RSW18] Aviad Rubinfeld, Tselil Schramm, and S. Matthew Weinberg. Computing exact minimum cuts without knowing the graph. In *ITCS*, volume 94 of *LIPICs*, pages 39:1–39:16. Schloss Dagstuhl - Leibniz-Zentrum fuer Informatik, 2018. **1**
- [Sch03] A. Schrijver. *Combinatorial Optimization - Polyhedra and Efficiency*. Springer, 2003. **2**
- [She09] Jonah Sherman. Breaking the multicommodity flow barrier for $o(\text{vlog } n)$ -approximations to sparsest cut. In *50th Annual IEEE Symposium on Foundations of Computer Science, FOCS 2009, October 25-27, 2009, Atlanta, Georgia, USA*, pages 363–372, 2009. **3, 11**
- [She13] Jonah Sherman. Nearly maximum flows in nearly linear time. In *54th Annual IEEE Symposium on Foundations of Computer Science, FOCS 2013, 26-29 October, 2013, Berkeley, CA, USA*, pages 263–269, 2013. Available at <http://arxiv.org/abs/1304.2077>. **1, 2, 10**
- [ST04] Daniel A. Spielman and Shang-Hua Teng. Nearly-linear time algorithms for graph partitioning, graph sparsification, and solving linear systems. In *Proceedings of the 36th Annual ACM Symposium on Theory of Computing, Chicago, IL, USA, June 13-16, 2004*, pages 81–90, 2004. **2, 10**
- [ST11] Daniel A. Spielman and Shang-Hua Teng. Spectral sparsification of graphs. *SIAM J. Comput.*, 40(4):981–1025, 2011. **1, 55**
- [ST14] D. Spielman and S. Teng. Nearly linear time algorithms for preconditioning and solving symmetric, diagonally dominant linear systems. *SIAM Journal on Matrix Analysis and Applications*, 35(3):835–885, 2014. Available at <http://arxiv.org/abs/cs/0607105>. **1**
- [SW19] Thatchaphol Saranurak and Di Wang. Expander decomposition and pruning: Faster, stronger, and simpler. In *Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2019, San Diego, California, USA, January 6-9, 2019*, pages 2616–2635, 2019. **30, 55**
- [Tar72] Robert Endre Tarjan. Depth-first search and linear graph algorithms. *SIAM J. Comput.*, 1(2):146–160, 1972. Announced at FOCS’71. **2, 10**
- [Tre08] Luca Trevisan. Approximation algorithms for unique games. *Theory of Computing*, 4(1):111–128, 2008. **1**
- [Uma03] Christopher Umans. Pseudo-random generators for all hardnesses. *Journal of Computer and System Sciences*, 67(2):419–440, 2003. **1, 10**
- [Wul17] Christian Wulff-Nilsen. Fully-dynamic minimum spanning forest with improved worst-case update time. In *STOC*, pages 1130–1143. ACM, 2017. **1, 2, 31, 33**