

Computing and Testing Small Vertex Connectivity in Near-Linear Time and Queries

Danupon Nanongkai¹, Thatchaphol Saranurak^{*2}, and Sorrachai Yingchareonthawornchai^{†3}

¹KTH Royal Institute of Technology, Sweden

²Toyota Technological Institute at Chicago, USA

³Aalto University, Finland

Abstract

We present a new, simple, algorithm for the *local vertex connectivity* problem (localVC) introduced by Nanongkai et al. [STOC’19]. Roughly, given an undirected unweighted graph G , a seed vertex x , a target volume ν , and a target separator size k , the goal of LocalVC is to remove k vertices “near” x (in terms of ν) to disconnect the graph in “local time”, which depends only on parameters ν and k . Nanongkai et al. presented an $O(\nu^{1.5}k \text{polylog}(\nu k))$ -time deterministic algorithm for this problem. In this paper, we present a simple randomized algorithm with running time $O(\nu k^2)$ and correctness probability $2/3$. Our algorithm is faster than the previous one when $k = O(\sqrt{\nu})$. We also can handle directed graphs and achieve $(1 + \epsilon)$ -approximation with even faster running time.

Plugging our new localVC algorithm in the generic framework of Nanongkai et al. immediately lead to a randomized $\tilde{O}(m + nk^3)$ -time algorithm for the classic k -vertex connectivity problem on undirected graphs. ($\tilde{O}(T)$ hides $\text{polylog}(T)$.) This is the *first* near-linear time algorithm for any $4 \leq k \leq \text{polylog } n$. Previously, linear-time algorithms were known only for $k \leq 3$ [Tarjan FOCS’71; Hopcroft, Tarjan SICOMP’73], despite a linear-time algorithm being postulated since 1974 in the book of Aho, Hopcroft and Ullman. Previous fastest algorithm for small k takes $\tilde{O}(m + n^{4/3}k^{7/3})$ time [Nanongkai et al., STOC’19].

This work is inspired by the algorithm of Chechik et al. [SODA’17] for computing the maximal k -edge connected subgraphs. In turn, our algorithms lead to some improvements over the bounds of Chechik et al. Forster and Yang [arXiv’19] has independently developed local algorithms similar to ours, and showed that they lead to an $\tilde{O}(k^3/\epsilon)$ bound for testing k -edge and ν -vertex connectivity, resolving two long-standing open problems in property testing since the work of Goldreich and Ron [STOC’97] and Orenstein and Ron [Theor. Comput. Sci.’11]. Inspired by this, we use local approximation algorithms to obtain bounds that are near-linear in k , namely $\tilde{O}(k/\epsilon)$ and $\tilde{O}(k/\epsilon^2)$ for the bounded and unbounded degree cases, respectively. For testing k -edge connectivity for simple graphs, the bound can be improved to $\tilde{O}(\min(k/\epsilon, 1/\epsilon^2))$.

Independent work: Independently from our result, Forster and Yang [2019] present local algorithms similar to ours and observed faster algorithms for computing the vertex connectivity and the maximal k -edge connected subgraphs (with lower running time than ours for the second problem).¹ They additionally observed that this leads to resolving two open problems in property testing, but did not observe an application to approximating the vertex connectivity. Our bounds for testing connectivities were inspired by their observation.

^{*}Work partially done while at KTH Royal Institute of Technology, Sweden.

[†]Work partially done while at Michigan State University, USA.

¹On April 17, 2019, our result was announced in the TCS+ talk by Thatchaphol Saranurak (<https://youtu.be/V1kq1filhjk>) and Forster and Yang announced their result at <https://arxiv.org/abs/1904.08382>.

Contents

1	Introduction	1
2	Preliminaries	4
3	Local edge connectivity	4
4	Local vertex connectivity	7
4.1	Reducing from vertex to edge connectivity	8
4.2	Proof of Theorem 4.1	10
5	Vertex connectivity	10
5.1	Undirected graphs	12
5.2	Directed graphs	12
6	Property Testing	13
6.1	Testing k -Edge-Connectivity: Unbounded-Degree Model	13
6.2	Testing k -Edge-Connectivity: Bounded-Degree Model	17
6.3	Testing k -Vertex-Connectivity: Unbounded-Degree Model	19
6.4	Testing k -Vertex-Connectivity: Bounded-Degree Model	22
	References	23
A	An alternate algorithm for local edge connectivity	25

1 Introduction

Vertex connectivity is a basic graph-theoretic concept. It concerns the smallest *vertex cut* where a set S of vertices is a vertex cut of a graph G if its removal disconnects some vertex $u \notin S$ from another vertex $v \notin S$. (When G is directed, this means that there is no directed path from u to v in the remaining graph.) The *vertex connectivity* of G , denoted by κ_G , is the size of the smallest vertex cut. The goal of the vertex connectivity problem is to compute κ_G and the smallest vertex cut. In this paper, we present a new, simple, algorithm for the *local* version of this problem, leading to almost optimal bounds for computing and approximating κ_G when κ_G is small, and other applications. For simplicity, our discussions below focus on exact algorithms for undirected graphs.

Local Vertex Connectivity (LocalVC). This problem concerns finding a vertex cut “near” a given vertex x . More precisely, for any vertex $v \in V$, define $N(v)$ to be the set of neighbors of v , $\deg(v) = |N(v)|$, $N(L) = (\bigcup_{v \in L} N(v)) \setminus L$, and $\text{vol}(L) = \sum_{v \in L} \deg(v)$ (we call $\text{vol}(L)$ the *volume* of L). Given a vertex x and two integers ν and k , the LocalVC problem concerns the set $L \subseteq V$ such that

$$x \in L, N(L) \text{ is a vertex cut of size less than } k, \text{ and } \text{vol}(L) \leq \nu. \quad (1)$$

In other words, we are interested in a small vertex cut $N(L)$ that is “near” x in the sense that L has small volume. An algorithm for this problem takes as input x, k, ν , and a pointer to an adjacency-list representation of G , and either

- outputs that $L \subseteq V$ satisfying Equation (1) does not exist, or
- returns a vertex cut S of size less than k .

Nanongkai et al. [NSY19] recently introduced the LocalVC problem and designed a deterministic algorithm that takes $O(\nu^{1.5}k \text{ polylog}(\nu k))$ time under mild conditions. In this paper, we present a simple randomized (Monte Carlo) algorithm that takes $O(\nu k^2)$ time under the same conditions.

Theorem 1.1 (Main Result). *There is a randomized (Monte Carlo) algorithm that takes as input a vertex $x \in V$ of an n -vertex m -edge graph $G = (V, E)$ represented as adjacency lists, and integers $k < n/4$ and $\nu < m/(8320k)$ and runs in $O(\nu k^2)$ time to output either*

- the “ \perp ” symbol indicating that, with probability at least $1/2$, $L \subseteq V$ satisfying Equation (1) does not exist, or
- a vertex cut S of size less than k .

Note that the error probability $1/2$ above can be made arbitrarily small by repeating the algorithm. Compared to the previous algorithm of Nanongkai et al., our algorithm is faster when $k \leq \sqrt{\nu}$. It is worth noting that one can also derive an $(\nu k^{O(k)})$ -time algorithm from the techniques of Chechik et al. [CHI+17] and some slower algorithms in the context of property testing (e.g. [GR02, OR11, YI12, YI10]). Our algorithm is in fact very simple: it simply repeatedly finds a path starting at x and ending at some random vertex. Our analysis is also very simple.

(Global) Vertex Connectivity. The main application of our result is efficient algorithms for the vertex connectivity problem. There has been a long line of research on this problem since at least five decades ago (e.g. [Kle69, Pod73, ET75, Eve75, Gal80, EH84, Mat87, BDD+82, LLW88, CT91, NI92, CR94, Hen97, HRG00, Gab06, CGK14]). (See Nanongkai et al. [NSY19] for a more comprehensive literature survey.) For the undirected case, Aho, Hopcroft and Ullman [AHU74, Problem 5.30] asked in their 1974 book for an $O(m)$ -time algorithm for computing κ_G . Prior to our result, $O(m)$ -time

algorithms were known only when $\kappa_G \leq 3$, due to the classic results of Tarjan [Tar72] and Hopcroft and Tarjan [HT73]. In this paper, we present an algorithm that takes near-linear time whenever $\kappa_G = O(\text{polylog}(n))$. In this paper, we obtain the first algorithm in many decades that guarantees a near-linear time complexity for higher values of κ_G .

Theorem 1.2. *There is a randomized algorithm that takes as input an undirected graph G and, with high probability, in time $\tilde{O}(m + nk^3)$ outputs a vertex cut S of size $k = \kappa_G$.²*

The above result is near-linear time whenever $k = O(\text{polylog}(n))$. By combining with previous results (e.g. [HRG00, LLW88]), the best running time for solving vertex connectivity is $\tilde{O}(m + \min\{nk^3, n^2k, n^\omega + nk^\omega\})$. Prior to our work, the best running time for $k > 3$ was $\tilde{O}(m + \min\{n^{4/3}k^{7/3}, n^2k, n^\omega + nk^\omega\})$ [NSY19, HRG00, LLW88]. In particular, we have an improved running time when $k \leq O(n^{0.457})$.

This result is obtained essentially by plugging in our LocalVC algorithm to the recent framework of Nanongkai et al. [NSY19]. The overall algorithm is fairly simple: Let L be such that $N(L)$ is the optimal vertex cut. We guess the values $\nu = \text{vol}(L)$ and $k = \kappa_G$, and run our LocalVC algorithm with parameters ν and k on n/ν randomly-selected seed nodes x .

Approximation Algorithms and Directed Graphs. Results in Theorems 1.1 and 1.2 can be generalized to $(1 + \epsilon)$ -approximation algorithms and to algorithms on directed graphs. The approximation guarantee means that the output vertex cut S is of size less than $\lfloor(1 + \epsilon)k\rfloor$. The time complexity for LocalVC is $O(\nu k/\epsilon)$. This improves the $\tilde{O}(\nu^{1.5}/(\sqrt{k}\epsilon^{1.5}))$ -time algorithm of Nanongkai et al. [NSY19] when $k \leq (\nu/\epsilon)^{1/3}$. For approximating κ_G , the time complexity is $\tilde{O}(\min\{mk/\epsilon, n^{2+o(1)}\sqrt{k}/\text{poly}(\epsilon)\})$ where $k = \kappa_G$.

Observe that the time complexities for exact algorithms in Theorems 1.1 and 1.2 can be obtained by setting $\epsilon = 1/(2k)$ and using the fact that for undirected graphs we can ensure in $O(m)$ time that $m = O(nk)$ [NI92].

Maximal k -Edge Connected Subgraphs. For any set of vertices $C \subseteq V$, its induced subgraph $G[C]$ is a maximal k -edge-connected subgraph of G if $G[C]$ is a k -edge-connected graph and no superset of C has this property.³ Chechik et al. [CHI+17] presented deterministic algorithms that can compute *all* maximal k -edge-connected subgraphs in $k^{O(k)}m\sqrt{n}\log(n)$ time on undirected graphs and $k^{O(k)}m\sqrt{m}\log(n)$ time on directed graphs.

Our result is mainly inspired by a part of Chechik et al.'s algorithms which runs some algorithm as a subroutine. Note that it is not hard to adapt their techniques to solve LocalVC in $k^{O(k)}\nu$ time. Our result is an improvement over this, and in turn implied an improved running time for computing the maximal k -edge-connected subgraphs. We improve the dependency on k in Chechik et al.'s result from $k^{O(k)}$ to $\text{poly}(k)$.

Independent work by Forster and Yang [FY19]. Independently from this paper (see Footnote 1), Forster and Yang present results similar to the above-mentioned results, except that (i) they show additional steps that lead to a better time complexity for computing the maximal k -edge connected subgraphs on undirected graphs, namely $O(k^4n^{3/2}\log n + km\log^2 n)$, (ii) they show some applications in graph property testing, and (iii) they do not consider approximation algorithms. Inspire by their property testing results, and by using approximation LocalVC algorithms, we obtain new bounds for testing vertex- and edge-connectivity below.

²As usual, with high probability (w.h.p.) means with probability at least $1 - 1/n^c$ for arbitrary constant $c \geq 1$.

³Recall that a graph is k -edge connected we we need to remove at least k edges so that there is no path from some node u to another node v .

Table 1: Comparison of property testing algorithms.

Unbounded-Degree	From [FY19]	This paper
k -edge-connectivity	$\tilde{O}(k^4/(\epsilon^2 \bar{d}^2)) = \tilde{O}(k^2/\epsilon^2)$	$\tilde{O}(k^2/(\epsilon^2 \bar{d})) = \tilde{O}(k/\epsilon^2)$
k -edge-connectivity on simple graphs	$\tilde{O}(k^4/(\epsilon^2 \bar{d}^2)) = \tilde{O}(k^2/\epsilon^2)$	$\tilde{O}(\min\{k^2/(\bar{d}\epsilon^2), k/(\bar{d}\epsilon^3)\})$ $= \tilde{O}(\min\{k/\epsilon^2, 1/\epsilon^3\})$
k -vertex-connectivity	$\tilde{O}(k^5/(\epsilon^2 \bar{d}^2)) = \tilde{O}(k^3/\epsilon^2)$	$\tilde{O}(k^2/(\epsilon^2 \bar{d})) = \tilde{O}(k/\epsilon^2)$
Bounded-Degree	From [FY19]	This paper
k -edge-connectivity	$\tilde{O}(k^3/\epsilon)$	$\tilde{O}(k/\epsilon)$
k -edge-connectivity on simple graphs	$\tilde{O}(k^3/\epsilon)$	$\tilde{O}(\min\{k/\epsilon, 1/\epsilon^2\})$
k -vertex-connectivity	$\tilde{O}(k^3/\epsilon)$	$\tilde{O}(k/\epsilon)$

Testing Vertex- and Edge- Connectivity. The study of testing graph properties, initiated by Goldreich et al. [GGR98], concerns the number of *queries* made to answer a question about graph properties. In the (*unbounded-degree*) *incident-lists model* [GR02, OR11], it is assumed that there is a list L_v of edges incident to each node v (or lists of outgoing and incoming edges for directed graphs), and an algorithm can make a query $q(v, i)$ for the i^{th} edge in the list L_v (if i is bigger than the list size, the algorithm receives a special symbol in return). For any $\epsilon > 0$, we say that an m -edge graph G is ϵ -far from having a property P if the number of edge insertions and deletions to make G satisfies P is at least ϵm . *Testing k -vertex connectivity* is a problem where we want to distinguish between when G is k -vertex connectivity and when it is ϵ -far from having such property. Testing k -edge connectivity is defined analogously. It is assumed that the algorithm receives n , ϵ , and k in the beginning. We show the following.

Theorem 1.3. *In the unbounded-degree incident-list model, k -vertex (where $k < n/4$) and -edge connectivity for directed graphs can be tested in $\tilde{O}(k/\epsilon^2)$ queries with probability at least $2/3$. Further, k -edge connectivity for simple directed graphs can be tested in $\tilde{O}(\min\{k/\epsilon^2, 1/\epsilon^3\})$ queries.*

In particular, our $\tilde{O}(k/\epsilon^2)$ bound is *linear* in k , and it can be independent of k for testing k -edge connectivity on simple graphs. In the *bounded-degree* incident-list model, the maximum degree d is assumed to be given to the algorithm and a graph is said to be ϵ -far from a property P if it needs at least ϵnd edge modifications to have such property. We show the following.

Theorem 1.4. *In the bounded-degree incident-list model, k -vertex (where $k < n/4$) and -edge connectivity for directed graphs can be tested in $\tilde{O}(k/\epsilon)$ queries with probability at least $2/3$. Further, k -edge connectivity for simple directed graphs can be tested in $\tilde{O}(\min\{k/\epsilon, 1/\epsilon^2\})$ queries.*

It has been open for many years whether the bounds from [GR02, OR11, YI10, YI12] which are exponential in k can be made polynomial (this was asked in e.g. [OR11]). Forster and Yang [FY19] answered this using the same result as our local algorithms. The dependence on k in their bounds is at least k^3 , even on bounded-degree graphs. We can improve the dependence on k essentially by using approximation local algorithms.

Detailed comparisons: To precisely compare our bounds with the previous ones, note that there are two sub-models: (i) In the *unbounded-degree* incident-list model, previous work assumes that $\bar{d} = m/n$ is known to the algorithm in the beginning. (ii) in the *bounded-degree* incident-list model, the maximum degree d is assumed to be given to the algorithm and a graph is said to be ϵ -far from a property P if it needs at least ϵnd edge modifications to have such property. Our $\tilde{O}(k/\epsilon^2)$ bound can be generalized to $\tilde{O}(k^2/(\epsilon^2 \bar{d}))$ bound in the unbounded-degree model. Similarly, our

$\tilde{O}(\min\{k/\epsilon^2, 1/\epsilon^3\})$ bound can be generalized to $\tilde{O}(\min\{k^2/(\bar{d}\epsilon^2), k/(\bar{d}\epsilon^3)\})$ bound in the unbounded-degree model.⁴ The bounds that are exponential in k by [OR11, YI10, YI12] are $\tilde{O}((\frac{ck}{\epsilon d})^{k+1})$ and $\tilde{O}((\frac{ck}{\epsilon d})^k d)$ in the unbounded- and bounded-degree models, respectively, for testing both directed k -vertex and -edge connectivity. The bounds that are polynomial in k by Forster and Yang [FY19] are (i) $\tilde{O}(k^5/(\epsilon \bar{d})^2)$ for k -vertex connectivity in the unbounded-degree model, (ii) $\tilde{O}(k^4/(\epsilon \bar{d})^2)$ for k -edge connectivity in the unbounded-degree model, and (iii) $\tilde{O}(k^3/\epsilon)$ for both k -vertex and -edge connectivity in the bounded-degree model. Table 1 details comparisons between our results, and those from [FY19].

2 Preliminaries

Let $G = (V, E)$ be a *directed* graph. For any $S, T \subseteq V$, let $E(S, T) = \{(u, v) \mid u \in S, v \in T\}$. For each vertex u , we let $\deg^{\text{out}}(u)$ denote the out-degree of u respectively. For a set $S \subseteq V$, the *out-volume* of S is $\text{vol}^{\text{out}}(S) = \sum_{u \in S} \deg^{\text{out}}(u)$. The a set of *out-neighbors* of S is $N^{\text{out}}(S) = \{v \mid (u, v) \in E(S, V - S)\}$. We can define in-degree $\deg^{\text{in}}(u)$, in-volume $\text{vol}^{\text{in}}(S)$, and a set of in-neighbors $N^{\text{in}}(S)$ analogously. We add a subscript G to the notation when it is not clear which graph we are referring to.

We say that (L, S, R) is a *separation triple* of G if L, S, R partition V where $L, R \neq \emptyset$, and $E(L, R) = \emptyset$. We also say that S is a *vertex cut* of G of size $|S|$. S is an *st-vertex cut* if $s \in L$ and $t \in R$. We say that s and t is k -connected (or k -vertex-connected) if there is no *st-vertex cut* of size less than k . G is k -connected if s and t is k -connected for every pair $s, t \in V$.

3 Local edge connectivity

In this section, we show a local algorithm for detecting an edge cut of size k and volume ν containing some seed node in $O(\nu k^2)$ time. The algorithm accesses (i.e. make queries for) $O(\nu k)$ edges (this is needed for our property testing results). Roughly, it outputs either a “small” cut or a symbol “ \perp ” indicating that there is no small cut containing x . The algorithm makes errors (i.e. it might be wrong when it outputs \perp) with probability at most $1/4$. By standard arguments, we can make the error probability arbitrarily small. Both the algorithm description and the analysis are very simple.

Theorem 3.1. *There exists the following randomized algorithm. It takes as inputs,*

- a pointer to an adjacency list representing an n -vertex m -edge graph $G = (V, E)$,
- a seed vertex $x \in V$,
- a volume parameter (positive integer) ν ,
- a cut-size parameter (positive integer) k , and
- a slack parameter (non-negative integer) gap , where

$$k \geq 1, \quad \nu > k, \quad \text{gap} \leq k \quad \text{and} \quad \nu < m(\text{gap} + 1)/(130k). \quad (2)$$

It accesses (i.e. makes queries for) $O(\nu k/(\text{gap} + 1))$ edges and runs in $O(\nu k^2/(\text{gap} + 1))$ time. It then outputs in the following manner.

- *If there exists a vertex-set S' such that $S' \ni x$, $\text{vol}^{\text{out}}(S') \leq \nu$, and $|E(S', V - S')| < k$, then with probability at least $3/4$, the algorithm outputs S a non-empty vertex-set $S \subsetneq V$ such that $|E(S, V - S)| < k + \text{gap}$ and $\text{vol}^{\text{out}}(S) \leq 130\nu k/(\text{gap} + 1)$ (otherwise it outputs \perp).*
- *Otherwise (i.e., no such S' exists), the algorithm outputs either the set S as above or \perp .*

⁴Theorem 1.3 can be obtained simply from the fact that $k \leq \bar{d}, d \leq k/\epsilon$ can be assumed without loss of generality.

In particular, we obtain exact and $(1 + \epsilon)$ -approximate local algorithms for Theorem 3.1 as follows. We set $\mathbf{gap} = 0$ in Theorem 3.1 for the exact local algorithm. For $(1 + \epsilon)$ -approximation, we set $\mathbf{gap} = \lfloor \epsilon k \rfloor$.

Corollary 3.2. *There exists the following randomized algorithm. It takes as the same inputs as in Theorem 3.1 where $\mathbf{gap} = 0$. It accesses (i.e. makes queries for) $O(\nu k)$ edges and runs in $O(\nu k^2)$ time. It then outputs in the following manner.*

- If there exists a vertex-set S' such that $S' \ni x$, $\text{vol}^{\text{out}}(S') \leq \nu$, and $|E(S', V - S')| < k$, then with probability at least $3/4$, the algorithm outputs S a non-empty vertex-set $S \subsetneq V$ such that $|E(S, V - S)| < k$ (otherwise it outputs \perp).
- Otherwise (i.e., no such S' exists), the algorithm outputs either the set S as above or \perp .

Corollary 3.3. *There exists the following randomized algorithm. It takes as the same inputs as in Theorem 3.1 with additional parameter $\epsilon \in (0, 1]$ where \mathbf{gap} is set to be equal to $\lfloor \epsilon k \rfloor$. It accesses (i.e. makes queries for) $O(\nu/\epsilon)$ edges and runs in $O(\nu k/\epsilon)$ time. It then outputs in the following manner.*

- If there exists a vertex-set S' such that $S' \ni x$, $\text{vol}^{\text{out}}(S') \leq \nu$, and $|E(S', V - S')| < k$, then with probability at least $3/4$, the algorithm outputs S a non-empty vertex-set $S \subsetneq V$ such that $|E(S, V - S)| < \lfloor (1 + \epsilon)k \rfloor$ (otherwise it outputs \perp).
- Otherwise (i.e., no such S' exists), the algorithm outputs either the set S as above or \perp .

Proof. The results follow from Theorem 3.1 where we set $\mathbf{gap} = \lfloor \epsilon k \rfloor$, and the following fact:

$$k + \mathbf{gap} = k + \lfloor \epsilon k \rfloor = \lfloor k \rfloor + \lfloor \epsilon k \rfloor \leq \lfloor k + \epsilon k \rfloor = \lfloor (1 + \epsilon)k \rfloor. \quad (3)$$

□

Algorithm 1: LocalEC(x, ν, k, \mathbf{gap})

Input: Seed node $x \in V$, target volume $\nu \geq k$, target cut-size $k \geq 1$, slack $\mathbf{gap} \leq k$.

Output: a vertex-set S or the symbol \perp with as in Theorem 3.1.

```

1 repeat  $k + \mathbf{gap}$  times
2    $y \leftarrow \text{NIL}$ .
3   Grow a BFS tree  $T$  starting from  $x$  (where every edges point towards leaves) as follows:
4   while the BFS algorithm still has an edge  $e = (a, b)$  to explore do
5     if  $e$  is not marked then
6       Mark  $e$ .
7       if the algorithm marks  $\geq 128\nu k / (\mathbf{gap} + 1)$  edges then return  $\perp$ .
8       With probability  $(\mathbf{gap} + 1) / (8\nu)$ , set  $y \leftarrow a$  and break the while-loop.
9   if  $y = \text{NIL}$  then return  $V(T)$ .
10  else Reverse the direction of edges in the path  $P_{xy}$  in  $T$  from  $x$  to  $y$ .
11 return  $\perp$ .
```

The algorithm for Theorem 3.1 is described in Algorithm 1. Roughly, in each iteration of the repeat-loop the algorithm runs a standard breadth-first search (BFS) algorithm, but randomly stop before finishing the BFS algorithm; this means we break the while-loop in Algorithm 1. (If the BFS algorithm finishes first, it outputs all nodes found in such iteration.) If an edge (a, b) is the last edge explored by the algorithm before the random stop happens, we flip the direction of all edges on the unique path from x to b in the BFS tree. We repeat this for $k + \mathbf{gap}$ iterations.

In the analysis below, we assume that every node accessed by Algorithm 1 has degree at least k . Otherwise, an edge-cut is found and we are done. We start with the following important observation.

Lemma 3.4. *Let $S \subset V$ be any set where $x \in S$. Let P_{xy} be a path from x to y . Suppose we reverse the direction of edges in P_{xy} . Then, we have $|E(S, V - S)|$ and $\text{vol}^{\text{out}}(S)$ are both decreased exactly by one if $y \notin S$. Otherwise, $|E(S, V - S)|$ and $\text{vol}^{\text{out}}(S)$ stay the same.*

Proof. We fix the set S and the path P_{xy} where $x \in S$. If $y \notin S$, then P_{xy} crosses the edges between S and $V - S$ back and forth so that the number of out-crossing edges (i.e., from S to $V - S$) is one plus the number of in-crossing edges (i.e., from $V - S$ to S). Therefore, reversing the direction of edges in P_{xy} decreases both $|E(S, V - S)|$ and $\text{vol}^{\text{out}}(S)$ exactly by one. If $y \in S$, then the number of out-crossing edges is equal to the number of in-crossing edges. Thus, reversing the direction of edges in P_{xy} does not change $|E(S, V - S)|$ and $\text{vol}^{\text{out}}(S)$. \square

It is easy to see Algorithm 1 accesses $O(\nu k / (\text{gap} + 1))$ edges, and runs in time $O(\nu k^2 / (\text{gap} + 1))$.

Lemma 3.5. *Algorithm 1 runs in time $O(\nu k^2 / (\text{gap} + 1))$, and accesses $O(\nu k / (\text{gap} + 1))$ edges.*

Proof. By , the algorithm accesses at most $\lceil 128\nu k / (\text{gap} + 1) \rceil = O(\nu k / (\text{gap} + 1))$ edges. The running time follows since BFS runs linear in number of edge accesses, and we repeat at most $k + \text{gap} \leq 2k$ iterations. \square

The following two lemmas prove the correctness of Algorithm 1.

Lemma 3.6. *If a vertex set S is returned, then $\emptyset \neq S \subset V$, $|E(S, V - S)| < k + \text{gap}$ and $\text{vol}^{\text{out}}(S) \leq 130\nu k / (\text{gap} + 1)$.*

Proof. If S is returned, then the BFS tree T gets stuck at $S = V(T)$. That is, at the end of the algorithm, we have $|E(S, V - S)| = 0$ and $\text{vol}^{\text{out}}(S) \leq 128\nu k / (\text{gap} + 1) \stackrel{(2)}{<} m$. We first show that $S \neq \emptyset$ and $S \neq V$. Note that by design either S contains a single node or $x \in S$. The fact that $S \neq V$ follows since $\text{vol}^{\text{out}}(S) < m$ and BFS tree T gets stuck with a spanning tree, $V(T) = V$, only if all edges are marked. The algorithm has reversed strictly less than $k + \text{gap}$ many paths P_{xy} because the algorithm did not reverse a path in the iteration that S is returned. Therefore, Lemma 3.4 implies that, initially, $|E(S, V - S)| < k + \text{gap}$, and $\text{vol}^{\text{out}}(S) < 128\nu k / (\text{gap} + 1) + k + \text{gap} \leq 130\nu k / (\text{gap} + 1)$. \square

Lemma 3.7. *If there is S where $x \in S$, $|E(S, V - S)| < k$ and $\text{vol}^{\text{out}}(S) \leq \nu$, then \perp is returned with probability at most $1/4$.*

Proof. Let $\tau = 128\nu k / (\text{gap} + 1)$, and R_{\perp} be an event that \perp is returned. For the purpose of analysis, let X be a random variable denoting the total number of edges that the algorithm marked assuming line 7 is ignored, which is the same as the total number of edges accessed by the algorithm. Our goal is to show that $\Pr[R_{\perp}] \leq 1/4$. It is enough to show that $\Pr[X \geq \tau] \leq 1/8$ and $\Pr[R_{\perp} \mid X < \tau] \leq 1/8$. If this is true, then we have the following.

$$\begin{aligned} \Pr[R_{\perp}] &= \Pr[R_{\perp} \cap (X < \tau)] + \Pr[R_{\perp} \cap (X \geq \tau)] \\ &= \Pr[R_{\perp} \mid X < \tau] \Pr[X < \tau] + \Pr[R_{\perp} \mid X \geq \tau] \Pr[X \geq \tau] \\ &\leq \Pr[R_{\perp} \mid X < \tau] + \Pr[X \geq \tau] \\ &\leq 1/8 + 1/8 = 1/4. \end{aligned}$$

The first two equalities follow from conditional probability. The third inequality follows since $\Pr[X < \tau] \leq 1$, and if $X \geq \tau$, the algorithm always outputs \perp .

We show that $\Pr[X \geq \tau] \leq 1/8$. In other words, we show the probability that the algorithm returns \perp at line 7 is at most $1/8$. We first show $E[X] \leq 16\nu k / (\text{gap} + 1)$. For $i \in \{1, \dots, k + \text{gap}\}$, let X_i be a random variable denoting the number of edges that are marked at the i th iteration of the repeat-loop. Then $E[X_i] = 8\nu / (\text{gap} + 1)$. Let $X = \sum_{i=1}^{k+\text{gap}} X_i$. By linearity of expectation, we have

$$E[X] = \sum_{i=1}^{k+\text{gap}} E[X_i] = (k + \text{gap})(8\nu) / (\text{gap} + 1) \leq 16\nu k / (\text{gap} + 1). \quad (4)$$

It remains to show that $\Pr[X < \tau] \geq 1 - 1/8$. By Equation (4), $E[X] \leq 16\nu k / (\text{gap} + 1)$, so $8 \cdot E[X] \leq 128\nu k / (\text{gap} + 1) = \tau$. By Markov's inequality, $\Pr[X < 8 \cdot E[X]] \geq 1 - 1/8$. Therefore, $\Pr[X < \tau] \geq 1 - 1/8$, and we have $\Pr[X \geq \tau] \leq 1/8$.

Next, we show that $\Pr[R_\perp \mid X < \tau] \leq 1/8$. In other words, given that \perp is not returned at line 7, we compute the probability that \perp is returned at the last line. Suppose that no set S' is returned before the last iteration. We will show that $\Pr[\bar{R}_\perp \mid X < \tau] \geq 1 - 1/8$. It suffices to show that the number of stops at edge (a, b) where $a \in S$ (i.e., an edge $(a, b) \in E(S, V)$) is at most gap after $k + \text{gap}$ iterations with probability at least $1 - 1/8$. If this is true, and such an event happens, then there are at least $k - 1$ iterations where we stop at edges in the set $E(V - S, V)$, and we do not stop at any edge in the set $E(S, V)$ in the final iteration. Lemma 3.4 implies that $|E(S, V - S)| = 0$ at the beginning of the last iteration. Therefore, the BFS tree T will return the set $V(T)$ since we do not stop at any edge in $E(S, V)$ in the final iteration.

Let Z be a random variable denoting the number of stops at an edge in $E(S, V)$ after $k + \text{gap}$ iterations. We show that $\Pr[Z \leq \text{gap}] \geq 1 - 1/8$. Since we never unmark edges, and we stop with probability $(\text{gap} + 1) / (8\nu)$ for each first visited edge by linearity of expectation, we have $E[Z] \leq \sum_{e \in E(S, V)} (\text{gap} + 1) / (8\nu) \leq \nu(\text{gap} + 1) / (8\nu) = (\text{gap} + 1) / 8$. Therefore, by Markov's inequality, we have $\Pr[Z < 8E[Z]] \geq 1 - 1/8$. Note that $Z < 8E[Z] \leq \text{gap}$. Hence, $\Pr[Z \leq \text{gap}] \geq 1 - 1/8$ as gap is an integer. \square

4 Local vertex connectivity

In this section, we show the vertex cut variant of the local algorithms from Section 3.

Theorem 4.1. *There exists the following randomized algorithm. It takes as inputs,*

- *a pointer to an adjacency list representing an n -vertex m -edge graph $G = (V, E)$,*
- *a seed vertex $x \in V$,*
- *a volume parameter (positive integer) ν ,*
- *a cut-size parameter (positive integer) k , and*
- *a slack parameter (non-negative integer) gap , where*

$$k \geq 1, \quad \nu > k, \quad \text{gap} \leq k \quad \text{and} \quad \nu < m(\text{gap} + 1) / (8320k). \quad (5)$$

It accesses (i.e. makes queries for) $O(\nu k / (\text{gap} + 1))$ edges and runs in $O(\nu k^2 / (\text{gap} + 1))$ time. It then outputs in the following manner.

- *If there exists a separation triple (L', S', R') such that $L' \ni x$, $\text{vol}^{\text{out}}(L') \leq \nu$, and $|S'| < k$, then with probability at least $3/4$, the algorithm outputs a vertex-cut of size at most $k + \text{gap}$ (otherwise it outputs \perp).*
- *Otherwise (i.e., no such separation triple (L', S', R') exists), the algorithm outputs either a vertex-cut of size at most $k + \text{gap}$ or \perp .*

We obtain exact and $(1 + \epsilon)$ -approximate local algorithms for Theorem 4.1 by setting $\mathbf{gap} = 0$ and $\mathbf{gap} = \lfloor \epsilon k \rfloor$, respectively.

Corollary 4.2. *There exists the following randomized algorithm. It takes as the same inputs as in Theorem 4.1 where \mathbf{gap} is set to be equal to 0. It accesses (i.e. makes queries for) $O(\nu k)$ edges and runs in $O(\nu k^2)$ time. It then outputs in the following manner.*

- *If there exists a separation triple (L', S', R') such that $L' \ni x$, $\text{vol}^{\text{out}}(L') \leq \nu$, and $|S'| < k$, then with probability at least $3/4$, the algorithm outputs a vertex-cut of size at most k (otherwise it outputs \perp).*
- *Otherwise (i.e., no such (L', S', R') exists), the algorithm outputs either a vertex-cut of size at most k or \perp .*

Corollary 4.3. *There exists the following randomized algorithm. It takes as the same inputs as in Theorem 4.1 with additional parameter $\epsilon \in (0, 1]$ where \mathbf{gap} is set to be equal to $\lfloor \epsilon k \rfloor$. It accesses (i.e. makes queries for) $O(\nu/\epsilon)$ edges and runs in $O(\nu k/\epsilon)$ time. It then outputs in the following manner.*

- *If there exists a separation triple (L', S', R') such that $L' \ni x$, $\text{vol}^{\text{out}}(L') \leq \nu$, and $|S'| < k$, then with probability at least $3/4$, the algorithm outputs a vertex-cut of size at most $\lfloor (1 + \epsilon)k \rfloor$ (otherwise it outputs \perp).*
- *Otherwise (i.e., no such (L', S', R') exists), the algorithm outputs either a vertex-cut of size at most $\lfloor (1 + \epsilon)k \rfloor$ or \perp .*

Proof. The results follow from Theorem 4.1 where we set $\mathbf{gap} = \lfloor \epsilon k \rfloor$, and Equation (3). \square

To prove Theorem 4.1, in Section 4.1 we first reduce the problem to the edge version of the problem using the well-known reduction (e.g. [Eve75, HRG00]) and then in Section 4.2 we plug the algorithm from Theorem 3.1 into the reduction.

4.1 Reducing from vertex to edge connectivity

Given a directed n -vertex m -edge graph $G = (V, E)$ and a vertex $x \in V$, let $G' = (V', E')$ be an n' -vertex m' -edge graph defined as follows. We call G' the *split graph* w.r.t. x . For each $v \in V - \{x\}$, we add vertices v_{in} and v_{out} to V' and a directed edge $(v_{\text{in}}, v_{\text{out}})$ to E' . We also add x to V' and we denote $x_{\text{in}} = x_{\text{out}} = x$ for convenience. For each edge $(u, v) \in E$, we add $(u_{\text{out}}, v_{\text{in}})$ to E' . Suppose, for convenience, that the minimum out-degree of vertices in G is 1. The following two lemmas draw connections between G and G' .

Lemma 4.4. *Let (L, S, R) be a separation triple in G where $S = N_G^{\text{out}}(L)$. Let $L' = \{v_{\text{in}}, v_{\text{out}} \mid v \in L\} \cup \{v_{\text{in}} \mid v \in S\}$ be a set of vertices in G' . Then $|E_{G'}(L', V' - L')| = |S|$ and $\text{vol}_{G'}^{\text{out}}(L) \leq \text{vol}_{G'}^{\text{out}}(L') \leq 2 \text{vol}_G^{\text{out}}(L)$.*

Proof. As $S = N_G^{\text{out}}(L)$, we have $|E_{G'}(L', V' - L')| = |\{(v_{\text{in}}, v_{\text{out}}) \mid v \in S\}| = |S|$. Also, $\text{vol}_{G'}^{\text{out}}(L') = \text{vol}_G^{\text{out}}(L) + |L| + |S| \leq 2 \text{vol}_G^{\text{out}}(L)$ because every vertex in G has out-degree at least 1 and $S = N_G^{\text{out}}(L)$. \square

Lemma 4.5. *Let $L' \ni x$ be a set of vertices of G' . Then, there is a set of vertices L in G such that $\text{vol}_G^{\text{out}}(L) \leq 2 \text{vol}_{G'}^{\text{out}}(L')$ and $|S| \leq |E_{G'}(L', V' - L')|$ where $S = N_G(L)$. Given L' , L can be constructed in $O(\text{vol}_{G'}^{\text{out}}(L'))$ time.*

Let $R = V - (L \cup S)$. We have $R \neq \emptyset$, i.e. (L, S, R) is a separation triple if $\text{vol}_{G'}^{\text{out}}(L') \leq m'/32$ and $|E_{G'}(L', V' - L')| \leq n/2$.

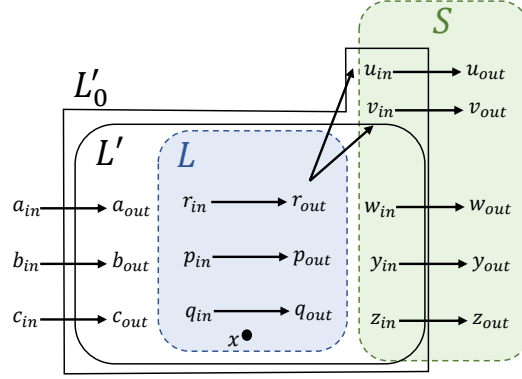


Figure 1: Construction of a separation triple (L, S, R) in G from an edge cut L' in G' . Most edges are omitted. From this example, $L'_0 = L' \cup \{u_{in}, v_{in}\}$, $L = \{r, p, q, x\}$, $S = \{u, v, w, y, z\}$.

Proof. First of all, note that if there is v where $v_{out} \in L'$ and $\deg_{G'}^{out}(v_{out}) \leq |E_{G'}(L', V' - L')|$, then we can return $L = \{v\}$ and $S = N_G^{out}(\{v\})$ and we are done. So from now, we assume that $\deg_{G'}^{out}(v_{out}) > |E_{G'}(L', V' - L')|$.

By the structure of G' , observe that there are sets $S_1, S_2 \subseteq V$ be such that

$$E_{G'}(L', V' - L') = \{(v_{in}, v_{out}) \mid v \in S_1\} \cup \{(u_{out}, v_{in}) \mid v \in S_2\}$$

Let $L'_0 = L' \cup \{v_{in} \mid v \in S_2\}$. See Figure 1 for illustration. So there is a set $S \subset V$ where

$$E_{G'}(L'_0, V' - L'_0) = \{(v_{in}, v_{out}) \mid v \in S\}.$$

We have $|S| = |E_{G'}(L'_0, V' - L'_0)| \leq |E_{G'}(L', V' - L')|$ because for each $v \in S_2$, $\deg^{out}(v_{in}) \leq 1 \leq \deg^{in}(v_{in})$. Also, $\text{vol}_{G'}^{out}(L'_0) \leq \text{vol}_{G'}^{out}(L') + |E_{G'}(L', V' - L')| \leq 2 \text{vol}_{G'}^{out}(L')$.

Let $L = \{v \mid v_{in}, v_{out} \in L'_0\}$. Note that $L \cap S = \emptyset$. See Figure 1 for illustration. Observe that $x \in L$ because $x_{out} = x_{in}$. Moreover, $N_G(L) = S$ and $\text{vol}_G^{out}(L) \leq \text{vol}_{G'}^{out}(L'_0) \leq 2 \text{vol}_{G'}^{out}(L')$. L be can constructed in time $O(|\{v_{out} \in L'\}|) = O(\text{vol}_{G'}^{out}(L'))$ because the minimum out-degree of vertices in G is 1.

For the second statement, observe that $R = V - (L \cup S) = \{v \mid v_{in} \notin L'_0\}$. Let $V'_{in} = \{v_{in} \in V'\} \cup \{x\}$ and $V'_{out} = \{v_{out} \in V'\} - \{x\}$. Let $k' = |E_{G'}(L'_0, V' - L'_0)|$. Suppose for contradiction that $R = \emptyset$. We claim that

$$|V' - L'_0| = |V'_{out} - L'_0| = k'.$$

This is because $L'_0 \supseteq V'_{in}$, $V' - L'_0 \subseteq V'_{out}$, and $E_{G'}(L'_0, V' - L'_0)$ only contains edges of the form (v_{in}, v_{out}) . Now, there are two cases. If $m' \geq 4n'k'$, then we have

$$\begin{aligned} m' &= \text{vol}_{G'}^{out}(L'_0) + \text{vol}_{G'}^{out}(V' - L'_0) \\ &\leq 2 \text{vol}_{G'}^{out}(L') + n'|V'_{out} - L'_0| \\ &\leq 2 \cdot m'/32 + n'k' \\ &\leq m'/16 + m'/4 < m' \end{aligned}$$

which is a contradiction. Otherwise, we have $m' < 4n'k'$. Note that $n' < 2n$ by the construction of G' and so $m' < 8nk'$. Hence, we have

$$\text{vol}_{G'}^{out}(L'_0) \geq |L'_0 \cap V'_{out}|k' \geq (n - k')k' \geq nk'/2 > m'/16$$

which contradicts $\text{vol}_{G'}^{out}(L'_0) \leq 2 \text{vol}_{G'}^{out}(L') \leq 2 \cdot m'/32$. \square

4.2 Proof of Theorem 4.1

Given an n -vertex m -edge $G = (V, E)$ represented as adjacency lists, a vertex $x \in V$ and parameters ν, k, gap from Theorem 4.1 where $\nu \leq (\text{gap} + 1)m/(8320k)$ and $k \leq n/4$, we will work on the split graph G' with n' -vertex m' -edge as described in Section 4.1. The adjacency list of G' can be created “on the fly”. Let $\text{LocalEC}(x', \nu', k', \text{gap}')$ denote the algorithm from Theorem 3.1 with parameters $x', \nu', k', \text{gap}'$. We run $\text{LocalEC}(x, 2\nu, k, \text{gap})$ on $G' = (V', E')$ in time $O(\nu k^2/(\text{gap} + 1))$. Note that $2\nu \leq (\text{gap} + 1)m/(8k) \leq (\text{gap} + 1)m'/(8k)$ as required by Theorem 3.1.

We show that if there exists a separation triple (L, S, R) in G where $L \ni x, |S| < k$, and $\text{vol}_G^{\text{out}}(L) \leq \nu$, then $\text{LocalEC}(x, 2\nu, k, \text{gap})$ outputs \perp with probability at most $1/4$. By Lemma 4.4, there exists L' in G' such that $L' \ni x, |E_{G'}(L', V - L')| < k$, and $\text{vol}_{G'}(L') \leq 2\text{vol}_G(L) \leq 2\nu$. Therefore, by Theorem 3.1, $\text{LocalEC}(x, 2\nu, k, \text{gap})$ returns \perp with probability at most $1/4$.

If, in G' , $\text{LocalEC}(x, 2\nu, k, \text{gap})$ returns L' , then by Theorem 3.1 we have $L' \ni x, |E_{G'}(L', V - L')| < k + \text{gap}$ and $\text{vol}_{G'}^{\text{out}}(L') \leq 260\nu k/\text{gap}$. It remains to show that we can construct $L \subset V$ in G such that $N_G^{\text{out}}(L)$ is a vertex-cut, and $|N_G^{\text{out}}(L)| < k + \text{gap}$. By Lemma 4.5, we can obtain in $O(\nu k/(\text{gap} + 1))$ time and two sets L and $S = N^{\text{out}}(L)$ where $|S| < k + \text{gap}$. Let $R = V - L \cup S$.

As $\text{vol}_{G'}^{\text{out}}(L') \leq 260\nu k/(\text{gap} + 1) \stackrel{(5)}{\leq} m'/32$ and $k + \text{gap} \leq 2k \leq n/2$, we have that (L, S, R) is a separation triple by Lemma 4.5. That is, $S = N_G^{\text{out}}(L)$ is a vertex cut.

5 Vertex connectivity

In this section, we show the first near-linear time algorithm for checking of k -connectivity for any $k = \tilde{O}(1)$ in both undirected and directed graphs.

Theorem 5.1. *There is a randomized (Monte Carlo) algorithm that takes as input an undirected graph G and a cut-size parameter k and an accuracy parameter $\epsilon \in (0, 1]$, and in time $\tilde{O}(m + nk^2/\epsilon)$ either outputs a vertex cut of size less than $\lfloor (1 + \epsilon)k \rfloor$ or declares that G is k -connected w.h.p. By setting $\epsilon < 1/k$, the same algorithm decides (exact) k -vertex-connectivity of G in $\tilde{O}(m + nk^3)$ time.*

By combining with the state-of-the-art algorithms for undirected graph, we obtain the the following.

Corollary 5.2. *There is a randomized (Monte Carlo) algorithm that takes as input an undirected graph G and a cut-size parameter k and an accuracy parameter $\epsilon \in (0, 1]$, and in time $\tilde{O}(m + \text{poly}(1/\epsilon) \min\{nk^2, n^{5/3+o(1)}k^{2/3}, n^{3+o(1)}/k, n^\omega\})$ either outputs a vertex cut of size less than $\lfloor (1 + \epsilon)k \rfloor$ or declares that G is k -connected w.h.p. For exact vertex connectivity, there is a randomized (Monte Carlo) algorithm for exact k -vertex-connectivity of G in $\tilde{O}(m + \min\{nk^3, n^2k, n^\omega + nk^\omega\})$ time.*

Proof. For approximate vertex connectivity, Nanongkai et al. [NSY19] (Theorem 1.2) present $\tilde{O}(m + \text{poly}(1/\epsilon) \min\{k^{4/3}n^{4/3}, n^{5/3+o(1)}k^{2/3}, n^{3+o(1)}/k, n^\omega\})$ -time algorithm. By Theorem 5.1, we have the $\tilde{O}(m + nk^2/\epsilon)$ -time algorithm. Combining both algorithms, the term $k^{4/3}n^{4/3}$ is replaced by nk^2 . For exact vertex connectivity, we combine the running time in Theorem 5.1 with the $\tilde{O}(\min\{m + n^2k, n^\omega + nk^\omega\})$ -time algorithm, which is given by Henzinger, Rao and Gabow [HRG00], and Linial, Lovász and Wigderson [LLW88]. \square

Now we present the new results for directed graph.

Theorem 5.3. *There is a randomized (Monte Carlo) algorithm that takes as input a directed graph G and a cut-size parameter k and an accuracy parameter $\epsilon \in (0, 1]$, and in time*

$\tilde{O}(\min\{mk/\epsilon, \text{poly}(1/\epsilon)n^{2+o(1)}\sqrt{k}\})$ either outputs a vertex cut of size less than $\lfloor(1+\epsilon)k\rfloor$ or declares that G is k -connected w.h.p. For exact vertex connectivity, there is a randomized (Monte Carlo) algorithm for exact k -vertex-connectivity of G in $\tilde{O}(\min\{mk^2, k^3n + k^{3/2}m^{1/2}n\})$ time.

Similarly, by combining with the state-of-the-art algorithms for directed graph, we obtain the the following.

Corollary 5.4. *There is a randomized (Monte Carlo) algorithm that takes as input an undirected graph G and a cut-size parameter k and an accuracy parameter $\epsilon \in (0, 1]$, and in time $\tilde{O}(\text{poly}(1/\epsilon) \min\{mk, mn^{2/3+o(1)}/k^{1/3}, k^{1/2}n^{2+o(1)}, n^{7/3+o(1)}/k^{1/6}, n^{3+o(1)}/k, n^\omega\})$ either outputs a vertex cut of size less than $\lfloor(1+\epsilon)k\rfloor$ or declares that G is k -connected w.h.p. For exact vertex connectivity, there is a randomized (Monte Carlo) algorithm for exact k -vertex-connectivity of G in $\tilde{O}(\min\{mk^2, k^3n + k^{3/2}m^{1/2}n, mn, n^\omega + nk^\omega\})$ time.*

Proof. For approximate vertex connectivity, Nanongkai et al. [NSY19] (Theorem 1.2) present $\tilde{O}(\text{poly}(1/\epsilon) \min\{m^{4/3}, nm^{2/3}k^{1/2}, mn^{2/3+o(1)}/k^{1/3}, n^{7/3+o(1)}/k^{1/6}, n^{3+o(1)}/k, n^\omega\})$ -time algorithm. By Theorem 5.3, we have the $\tilde{O}(\min\{mk^2, k^3n + k^{3/2}m^{1/2}n\})$ -time algorithm. Combining both algorithms, the terms $m^{4/3}$ and $nm^{2/3}k^{1/2}$ are subsumed. For exact vertex connectivity, we combine the running time in Theorem 5.3 with the $\tilde{O}(\min\{mn, n^\omega + nk^\omega\})$ -time algorithm, which is given by Henzinger, Rao and Gabow [HRG00], and by Cheriyan and Reif [CR94]. \square

To prove Theorem 5.1 and Theorem 5.3, we will apply our framework [NSY19] for reducing the vertex connectivity problem to the local vertex connectivity problem. To describe the reduction, let $T_{\text{pair}}(m, n, k, \epsilon, p)$ be the time required for, given vertices s and t , either finding a st -vertex cut of size less than $\lfloor(1+\epsilon)k\rfloor$ or declaring that s and t is k -connected correctly with probability at least $1-p$. Let $T_{\text{local}}(\nu, k, \epsilon, p)$ be the time for solving correctly probability at least $1-p$ the local vertex connectivity problem from Corollary 4.3 when a volume parameter is ν , the cut-size parameter is k , and the accuracy parameter is ϵ .

Lemma 5.5 ([NSY19] Lemma 5.14, 5.15). *There is a randomized (Monte Carlo) algorithm that takes as input a graph G , a cut-size parameter k , and an accuracy parameter $\epsilon > 0$, and runs in time in one of these expressions*

$$\tilde{O}(m/\bar{\nu}) \cdot (T_{\text{pair}}(m, n, k, \epsilon, 1/\text{polyn}) + T_{\text{local}}(\bar{\nu}, k, \epsilon, 1/\text{polyn})) \quad (6)$$

$$\tilde{O}(n/\bar{n}) \cdot (T_{\text{pair}}(m, n, k, \epsilon, 1/\text{polyn}) + T_{\text{local}}(\bar{n}^2 + \bar{n}k, k, \epsilon, 1/\text{polyn})) \quad (7)$$

where $\bar{\nu} \leq m$, and $\bar{n} \leq n$ are optimizing parameters that can be chosen, and either outputs a vertex cut of size less than $\lfloor(1+\epsilon)k\rfloor$ or declares that G is k -connected w.h.p.

For completeness, we give a simple proof sketch of Equation (6) which is used for our algorithm for undirected graphs. The idea for other equations is similar and also simple.

Proof sketch. Suppose that G is not k -connected. It suffices to show an algorithm that outputs a vertex cut of size less than $\lfloor(1+\epsilon)k\rfloor$ w.h.p. By considering both G and its reverse graph (where the direction of each edge is reversed), there exists w.l.o.g. a separation triple (L, S, R) where $\text{vol}^{\text{out}}(L) \leq \text{vol}^{\text{out}}(R)$. There are two cases.

Suppose $\text{vol}^{\text{out}}(L) \geq \bar{\nu}$. By sampling $\tilde{O}(m/\nu)$ pairs of edges $e = (x, x')$ and $f = (y, y')$, there exists w.h.p. a pair (e, f) where $x \in L$ and $y \in R$. For such pair (x, y) , if we check x and y is k -connected in time $T_{\text{pair}}(m, n, k, \epsilon, 1/\text{polyn})$, we must obtain an xy -vertex cut of size less than $\lfloor(1+\epsilon)k\rfloor$. So, if we check this for each pair (x, y) and we will obtain the cut w.h.p.

Suppose $\text{vol}^{\text{out}}(L) \leq \bar{\nu}$. Suppose further that $\text{vol}^{\text{out}}(L) \in (2^{i-1}, 2^i]$. By sampling $\tilde{O}(m/2^i)$ pair of edges $e = (x, x')$, there exists w.h.p. a edge e where $x \in L$. For such vertex x , if we check the local vertex connectivity in time $T_{\text{local}}(2^i, k, \epsilon, 1/\text{polyn})$, then the algorithm must return a vertex cut of size less than $\lfloor (1 + \epsilon)k \rfloor$. So, if we check this for each pair (x, y) and we will obtain the cut w.h.p.

To conclude, the running time in the first case is $\tilde{O}(m/\bar{\nu}) \cdot T_{\text{pair}}(m, n, k, \epsilon, 1/\text{polyn})$. For the second case, we try all $O(\log n)$ many 2^i , each of which case takes $\tilde{O}(m/2^i) \cdot T_{\text{local}}(2^i, k, \epsilon, 1/\text{polyn}) = \tilde{O}(m/\bar{\nu}) \cdot T_{\text{local}}(\bar{\nu}, k, \epsilon, 1/\text{polyn})$ assuming that $T_{\text{local}}(\nu, k, \epsilon, 1/\text{polyn}) \geq \nu$. This complete the proof of the running time. For the correctness, if G is not k -connected, we must obtain a desired vertex cut of size $\lfloor (1 + \epsilon)k \rfloor$ w.h.p. So if we do not find any cut, we declare that G is k -connected w.h.p. \square

5.1 Undirected graphs

Here, we prove Theorem 5.1. First, it suffices to show an algorithm with $\tilde{O}(mk/\epsilon)$ time. Indeed, by using the sparsification algorithm by Nagamochi and Ibaraki [NI92], we can sparsify an undirected graph in linear time so that $m = O(nk)$ and k -connectivity is preserved. By this preprocessing, the total running time is $O(m) + \tilde{O}((nk)k/\epsilon) = \tilde{O}(m + nk^2/\epsilon)$ as desired. Next, we assume that $k \leq \min\{n/4, 5\delta\}$ where δ is the minimum out-degree of G . If $k > 5\delta$, then it is G is clearly not k -connected and the out-neighbor of the vertex with minimum out-degree is a vertex cut of size less than k . If $k > n/4$, then we can invoke the algorithm by Henzinger, Rao and Gabow [HRG00] for solving the problem exactly in time $O(mn) = O(mk)$.

Now, we have $T_{\text{pair}}(m, n, k, \epsilon, p) = O(mk)$ by Ford-Fulkerson algorithm. By repeating the algorithm from Corollary 4.3 $O(\log \frac{1}{p})$ times for boosting success probability, $T_{\text{local}}(\nu, k, \epsilon, p) = O(\nu k \epsilon^{-1} \log \frac{1}{p})$. We choose $\bar{\nu} = O(\epsilon m)$ as required by Corollary 4.3 and also $k \leq \min\{n/4, 5\delta\}$. Applying Lemma 5.5 (Equation (6)), we obtain an algorithm for Theorem 5.1 with running time

$$\tilde{O}(m/\epsilon m) \times O(mk + (\epsilon m)k\epsilon^{-1} \log n) = \tilde{O}(mk/\epsilon).$$

5.2 Directed graphs

Here, we prove Theorem 5.3. We again assume that $k \leq \min\{n/4, 5\delta\}$ using the same reasoning as in the undirected case. We first show how to obtain the claimed time bound for the approximate problem. Note that the $\tilde{O}(mk/\epsilon)$ -time algorithm follows by the same argument as in the undirected case, because both Ford-Fulkerson algorithm and the local algorithm from Corollary 4.3 work as well in directed graphs.

Next, we show an approximate algorithm with running time $\tilde{O}(\text{poly}(1/\epsilon)n^{2+o(1)}\sqrt{k})$. We assume $k \leq n^{2/3}$ (for $k \geq n^{2/3}$, we use state-of-the-art $\tilde{O}(\text{poly}(1/\epsilon)n^{3+o(1)}/k)$ -time algorithm by [NSY19]). We have $T_{\text{local}}(\nu, k, \epsilon, p) = O(\nu k \epsilon^{-1} \log \frac{1}{p})$ by Corollary 4.3 and $T_{\text{pair}}(m, n, k, \epsilon, 1/\text{poly } n) = \tilde{O}(\text{poly}(1/\epsilon)n^{2+o(1)})$ using the recent result for $(1 + \epsilon)$ -approximating the minimum st -vertex cut by Chuzhoy and Khanna [CK19]. By choosing $\bar{n} = n/\sqrt{k}$ for Lemma 5.5 (Equation (7)), we obtain an algorithm with running time

$$\begin{aligned} \tilde{O}(n/\bar{n}) \cdot (n^{2+o(1)} \text{poly}(1/\epsilon) + (\bar{n}^2 k + \bar{n} k^2)/\epsilon) &= \tilde{O}(\sqrt{k} \text{poly}(1/\epsilon)) \cdot (n^{2+o(1)} + n^2 + nk^{1.5}) \\ &= \tilde{O}(n^{2+o(1)} \sqrt{k} \text{poly}(1/\epsilon)). \end{aligned}$$

Next, we show how to obtain the time bound for the exact problem. First, observe that we can obtain a $\tilde{O}(mk^2)$ -time exact algorithm from the $\tilde{O}(mk/\epsilon)$ -time approximate algorithm by setting $\epsilon < 1/k$. It remains to show an algorithm with the running time $\tilde{O}(k^3 n + k^{3/2} m^{1/2} n)$. By Corollary 4.2, there is an exact algorithm for local vertex connectivity with running time $T_{\text{local}}(\nu, k, 1/2k, p) = O(\nu k^2 \log \frac{1}{p})$. Also, we have $T_{\text{pair}}(m, n, k, \epsilon, p) = O(mk)$ by Ford-Fulkerson

algorithm. By choosing $\bar{n} = O(\sqrt{m/k})$ in Lemma 5.5 (Equation (7)), we obtain an algorithm with running time

$$\begin{aligned} \tilde{O}(n/\bar{n}) \cdot (mk + (\bar{n}^2 + \bar{n}k)k^2) &= \tilde{O}(n/\bar{n}) \cdot (mk + (m/k + \sqrt{mk})k^2) \\ &= \tilde{O}(n\sqrt{k/m}) \cdot (mk + k^{2.5}\sqrt{m}) \\ &= \tilde{O}(k^{3/2}m^{1/2}n + k^3n). \end{aligned}$$

Note that $\bar{n}^2 + \bar{n}k = O(m/k)$ as required by Corollary 4.2.

6 Property Testing

In this section, we show property testing algorithms for distinguishing between a graph that is k -edge/ k -vertex connected and a graph that is ϵ -far from having such property with constant probability for both unbounded-degree and bounded-degree incident-list model. Recall that for any $\epsilon > 0$, a directed graph G is ϵ -far from having a property P if at least ϵm edge modifications are needed to make G satisfy property P . We assume that $\bar{d} = m/n$ is known to the algorithm at the beginning.

Theorem 6.1. *For unbounded-degree model, there is a property testing algorithm for k -edge (k -vertex where $k < n/4$) connectivity with correct probability at least $2/3$ that uses $\tilde{O}(k^2/(\epsilon^2\bar{d}))$ queries (same for k -vertex) and runs in $\tilde{O}(k^2/(\epsilon^{11/3}\bar{d}))$ time ($\tilde{O}(k^2/(\epsilon^{2.5}\bar{d}))$ time for k -vertex). If \bar{d} is unknown, then there is a similar algorithm that uses $\tilde{O}(k/\epsilon^2)$ queries (same for k -vertex), and runs in $\tilde{O}(k/\epsilon^{8/3})$ time ($\tilde{O}(k/\epsilon^{2.5})$ time for k -vertex). If G is simple, then the same algorithm for testing k -edge-connectivity queries at most $\tilde{O}(\min\{k^2/(\bar{d}\epsilon^2), k/(\bar{d}\epsilon^3)\})$ (or $\tilde{O}(\min\{k/\epsilon^2, 1/\epsilon^3\})$ edges if \bar{d} is unknown), and runs in $\tilde{O}(1/(\epsilon^{14/3}\bar{d}))$ (or $\tilde{O}(1/\epsilon^{11/3})$ if \bar{d} is unknown).*

For bounded-degree model, we assume that d is known in the beginning.

Theorem 6.2. *For bounded-degree model, there is a property testing algorithm for k -edge (k -vertex where $k < n/4$) connectivity with correct probability at least $2/3$ that uses $\tilde{O}(k/\epsilon)$ queries (same for k -vertex) and runs in $\tilde{O}(k/\epsilon^{8/3})$ time ($\tilde{O}(k/\epsilon^{1.5})$ time for k -vertex). If G is simple, then the same algorithm for testing k -edge-connectivity queries at most $\tilde{O}(\min\{k/\epsilon, 1/\epsilon^2\})$.*

We prove Theorem 6.1 using properties of ϵ -far from being k -edge/vertex connected from [OR11] and [FJ99] along with a variant of approximate LocalEC in Section 6.1, and approximate LocalVC in Section 6.3.

6.1 Testing k -Edge-Connectivity: Unbounded-Degree Model

In this section, we prove Theorem 6.1 for testing k -edge-connectivity. The key tool for our property testing algorithm is approximate local edge connectivity in a suitable form for the application to property testing. We can derive the following gap version of LocalEC in [NSY19] by essentially setting $\epsilon = \text{gap}/k$.

Lemma 6.3 (Implicit in [NSY19]). *There is a randomized (Monte Carlo) algorithm that takes as input a vertex $x \in V$ of an n -vertex m -edge directed graph $G = (V, E)$ represented as incidence lists, a volume parameter ν , a cut-size parameter $k \geq 1$, and “gap” parameter $\text{gap} \in (0, k)$ where $\nu < \text{gap} \cdot m/(8k)$, queries at most $\tilde{O}(\nu k/\text{gap})$ edges, runs in $\tilde{O}((\nu/\text{gap})^{5/3}k)$ time, and*

- if there is a vertex-set S such that $S \ni x$, $\text{vol}^{\text{out}}(S) \leq \nu$, and $|E(S, V - S)| < k - \text{gap}$, then it returns an edge-cut of size less than k ,
- if there is no vertex-set S such that $S \ni x$, $\text{vol}^{\text{out}}(S) \leq \nu$, and $|E(S, V - S)| < k$, then it returns the symbol \perp .

We present an algorithm for testing k -edge-connectivity assuming Lemma 6.3.

Algorithm.

1. Sample $\Theta(\frac{1}{\epsilon})$ vertices uniformly.
2. If any of the sampled vertex has degree less than k , returns the corresponding edge-cut.
3. Sample $\Theta(\frac{k \log k}{\epsilon \bar{d}})$ vertices uniformly (if \bar{d} is unknown, then we sample $\Theta(\frac{\log k}{\epsilon})$ instead).
4. For each sampled vertex x , and for $i \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\}$,
 - (a) let $\nu = 2^{i+2} \epsilon^{-1} \lfloor \log_2 k \rfloor$, and $\text{gap} = 2^i - 1$.
 - (b) run $\text{GapLocalEC}(x, \nu, k, \text{gap})$ on both G and G^R where G^R is G with reversed edges.
5. Return an edge-cut of size less than k if any execution of GapLocalEC returns a cut. Otherwise, declare that G is k -edge-connected.

Query and Time Complexity. We first show that the number of edge queries is at most $\tilde{O}(k^2/(\epsilon^2 \bar{d}))$. For each sampled vertex x and $i \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\}$, by Lemma 6.3, GapLocalEC queries $\tilde{O}(\nu k / \text{gap}) = \tilde{O}(k/\epsilon)$ edges. The result follows from we repeat $\log_2 k$ times per sample, and we sample $O(k \log k / (\epsilon \bar{d}))$ times. Next, we show that the running time is $\tilde{O}(k^2/(\epsilon^{11/3} \bar{d}))$. This follows from the same argument, but we use the running time for GapLocalEC instead of edge-query complexity. If \bar{d} is unknown, we can remove the term k/\bar{d} from above since we sample $\Theta(\frac{\log k}{\epsilon})$ vertices instead.

Correctness. If G is k -edge-connected, the algorithm above never returns an edge-cut. We show that if G is ϵ -far from being k -edge-connected, then the algorithm outputs an edge-cut of size less k with constant probability. We start with simple observation.

Lemma 6.4. *If $m < nk/4$, then with constant probability, the algorithm outputs an edge-cut of size less than k at step 2.*

Proof. Suppose $m < nk/4$. There are at most $n/2$ nodes with out-degree at least k . Hence, there are at least $n/2$ nodes of degree less than k . In this case, we can sample $O(1)$ time where each sampled node x we check $\text{deg}^{\text{out}}(x) < k$ to get k -edge-cut with constant probability. \square

From now we assume that

$$m \geq nk/4. \tag{8}$$

Next, we state important properties when G is ϵ -far from being k -edge-connected. For any non-empty subset $X \subset V$, let $d^{\text{out}}(X) = |E(X, V - X)|$, and $d^{\text{in}}(X) = |E(V - X, X)|$.

Theorem 6.5 ([OR11] Corollary 8). *A directed graph $G = (V, E)$ is ϵ -far from being k -edge-connected (for $k \geq 1$) if and only if there exists a family of disjoint subsets $\{X_1, \dots, X_t\}$ of vertices for which either $\sum_i (k - d^{\text{out}}(X_i)) > \epsilon m$ or $\sum_i (k - d^{\text{in}}(X_i)) > \epsilon m$.*

Let $\mathcal{F} := \{X_1, \dots, X_t\}$ as in Theorem 6.5. We assume without loss of generality that

$$\sum_i (k - d^{\text{out}}(X_i)) > \epsilon m. \quad (9)$$

Let $\mathcal{C}_{-1} = \{X \in \mathcal{F} : k \leq d^{\text{out}}(X)\}$. For $i \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\}$, let $\mathcal{C}_i = \{X \in \mathcal{F} : k - d^{\text{out}}(X) \in [2^i, 2^{i+1})\}$. Note that

$$2^i \leq k, \text{ for any } i \in \{0, \dots, \lfloor \log_2 k \rfloor\} \quad (10)$$

and

$$\mathcal{F} = \bigsqcup_{i=-1}^{\lfloor \log_2 k \rfloor} \mathcal{C}_i \quad (11)$$

where \bigsqcup is the disjoint union. Let $\mathcal{C}_{i,\text{big}} = \{X \in \mathcal{C}_i : \text{vol}^{\text{out}}(X) \geq 2^{i+2}\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)\}$, and $\mathcal{C}_{i,\text{small}} = \mathcal{C}_i - \mathcal{C}_{i,\text{big}}$. The following lemma is the key for the algorithm's correctness.

Lemma 6.6. *There is i such that $|\mathcal{C}_{i,\text{small}}| \geq \epsilon n \bar{d} / (4k(\lfloor \log_2 k \rfloor + 1))$. If \bar{d} is unknown, we have $|\mathcal{C}_{i,\text{small}}| \geq \epsilon n / (16(\lfloor \log_2 k \rfloor + 1))$ instead.*

We show that Lemma 6.6 implies the correctness of the algorithm. By sampling $O(k \log k / (\epsilon \bar{d}))$ many vertices (or $O(\log k / \epsilon)$ if \bar{d} is unknown), we get an event where a sampled vertex belongs to some vertex set $X \in \mathcal{C}_{i,\text{small}}$ with constant probability (since $\mathcal{C}_{i,\text{small}}$ contains disjoint sets). We run GapLocalEC for every $i \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\}$ using $\nu = 2^{i+2}\epsilon^{-1}\lfloor \log_2 k \rfloor$, and $\text{gap} = 2^i - 1$; also, there exists i such that $|\mathcal{C}_{i,\text{small}}| \geq \epsilon n \bar{d} / (4k(\lfloor \log_2 k \rfloor + 1))$ (or $(\epsilon n / (16(\lfloor \log_2 k \rfloor + 1)))$ if \bar{d} is unknown) by Lemma 6.6. Therefore, by Lemma 6.3 GapLocalEC outputs an edge-cut of size less than k with constant probability.

Proof of Lemma 6.6. We show that there is $i > 0$ such that $|\mathcal{C}_i| > \epsilon m / (2^i(\lfloor \log_2 k \rfloor + 1))$. First, we show that there is $i > 0$ such that

$$\sum_{X \in \mathcal{C}_i} (k - d^{\text{out}}(X)) > \epsilon m / (\lfloor \log_2 k \rfloor + 1). \quad (12)$$

Suppose otherwise that for every i , $\sum_{X \in \mathcal{C}_i} (k - d^{\text{out}}(X)) \leq \epsilon m / (\lfloor \log_2 k \rfloor + 1)$. We have $\sum_{X \in \mathcal{F}} (k - d^{\text{out}}(X)) \stackrel{(11)}{=} \sum_{i=-1}^{\lfloor \log_2 k \rfloor} \sum_{X \in \mathcal{C}_i} (k - d^{\text{out}}(X)) \leq \sum_{i=0}^{\lfloor \log_2 k \rfloor} \sum_{X \in \mathcal{C}_i} (k - d^{\text{out}}(X)) \leq \epsilon m$. However, this contradicts Equation (9) as in Theorem 6.5. Second, we claim that for any i ,

$$|\mathcal{C}_i| 2^{i+1} \geq \sum_{X \in \mathcal{C}_i} (k - d^{\text{out}}(X)).$$

This follows trivially from that each element X in the set \mathcal{C}_i , $k - d^{\text{out}}(X) \leq 2^{i+1}$. For i that satisfies Equation (12) we have

$$|\mathcal{C}_i| \geq \sum_{X \in \mathcal{C}_i} (k - d^{\text{out}}(X)) / 2^{i+1} > \epsilon m / (2^{i+1}(\lfloor \log_2 k \rfloor + 1)). \quad (13)$$

Recall that $\mathcal{C}_{i,\text{big}} = \{X \in \mathcal{C}_i : \text{vol}^{\text{out}}(X) \geq 2^{i+2}\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)\}$, and $\mathcal{C}_{i,\text{small}} = \mathcal{C}_i - \mathcal{C}_{i,\text{big}}$. We show that $|\mathcal{C}_{i,\text{big}}| < |\mathcal{C}_i|/2$. Therefore, for i that satisfies Equation (13) we have

$$2|\mathcal{C}_{i,\text{big}}| \leq \sum_{X \in \mathcal{C}_{i,\text{big}}} \text{vol}^{\text{out}}(X) / (2^{i+1}\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)) \leq \epsilon m / (2^{i+1}(\lfloor \log_2 k \rfloor + 1)) \stackrel{(13)}{<} |\mathcal{C}_i|.$$

The first inequality is because the term $\text{vol}^{\text{out}}(X)/(\gamma\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)) \geq 2$ for each $X \in \mathcal{C}_{i,\text{big}}$, we have $\sum_{X \in \mathcal{C}_{i,\text{big}}} \text{vol}^{\text{out}}(X)/(2^{i+1}\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)) \geq 2|\mathcal{C}_{i,\text{big}}|$. The second inequality is because elements in $\mathcal{C}_{i,\text{big}}$ are disjoint and thus $\sum_{X \in \mathcal{C}_{i,\text{big}}} \text{vol}^{\text{out}}(X) \leq m$. The final inequality follows from Equation (13).

For the same i , since $|\mathcal{C}_{i,\text{big}}| < |\mathcal{C}_i|/2$, we have

$$|\mathcal{C}_{i,\text{small}}| \geq |\mathcal{C}_i|/2 \geq \epsilon m/(2^{i+2}(\lfloor \log_2 k \rfloor + 1)) \geq \epsilon n\bar{d}/(4k(\lfloor \log_2 k \rfloor + 1)). \quad (14)$$

The last inequality follows from $m = n\bar{d}$, and Equation (10). If \bar{d} is unknown, by Equation (8), the last inequality becomes $\epsilon m/(2^{i+2}(\lfloor \log_2 k \rfloor + 1)) \geq \epsilon nk/(16k\lfloor \log_2 k \rfloor) = \epsilon n/(16(\lfloor \log_2 k \rfloor + 1))$. This follows from Equation (10) and Equation (8). \square

An improved bound for a simple graph. The same algorithm gives an improved bound when G is simple. If $\epsilon \geq 4/k$, the algorithm queries at most $\tilde{O}(k^2/(\epsilon^2\bar{d})) = \tilde{O}(1/(\epsilon^4\bar{d}))$ edges (and $\tilde{O}(1/\epsilon^3)$ edges if \bar{d} is unknown). Now, we assume $\epsilon > 4/k$, we show that there are $\Omega(\epsilon n\bar{d}/k)$ ($\Omega(\epsilon n)$ if \bar{d} is unknown) many vertices with degree less than k .

Lemma 6.7. *If $\epsilon > 4/k$, G is simple, and ϵ -far from being k -edge-connected, then there exist at least $\epsilon n/2$ vertices ($\epsilon\bar{d}n/(8k)$ vertices if \bar{d} is unknown) with degree less than k .*

Lemma 6.7 immediately yields the correctness of the algorithm as number of singleton with degree less than k is at least $\epsilon n/2$ vertices ($\epsilon\bar{d}n/(8k)$ vertices if \bar{d} is unknown), and we sample $\Theta(k/(\epsilon\bar{d}))$ (or $\Theta(1/\epsilon)$ vertices if \bar{d} is unknown) at step 1 and 2 to check if each sampled vertex has degree less than k . Next, we prove Lemma 6.7.

Proof of Lemma 6.7. Let $\mathcal{C} = \{X : k - d^{\text{out}}(X) \geq 1\}$. We claim that

$$|\mathcal{C}| > \epsilon m/k. \quad (15)$$

This follows from

$$|\mathcal{C}|k \geq \sum_{X \in \mathcal{C}} (k - d^{\text{out}}(X)) \geq \sum_{X \in \mathcal{F}} (k - d^{\text{out}}(X)) > \epsilon m.$$

The first inequality follows from each term $k - d^{\text{out}}(X)$ is at most k , and there are $|\mathcal{C}|$ terms. The second inequality follows from each $X \in \mathcal{F} \setminus \mathcal{C}$, $k - d^{\text{out}}(X) \leq 0$. The third inequality follows from Equation (9).

Let $\mathcal{C}_{\text{big}} = \{X \in \mathcal{C} : \text{vol}^{\text{out}}(X) \geq 2k/\epsilon\}$, and $\mathcal{C}_{\text{small}} = \mathcal{C} - \mathcal{C}_{\text{big}}$. We claim that

$$|\mathcal{C}_{\text{small}}| > \epsilon n/8. \quad (16)$$

First, we show that

$$|\mathcal{C}_{\text{big}}| < |\mathcal{C}|/2. \quad (17)$$

This follows from

$$|\mathcal{C}_{\text{big}}| \leq \sum_{X \in \mathcal{C}_{\text{big}}} \text{vol}^{\text{out}}(X)/(2k\epsilon^{-1}) \leq \epsilon m/(2k) < |\mathcal{C}|/2.$$

The first inequality follows from the fact that for each $X \in \mathcal{C}_{\text{big}}$, $\text{vol}^{\text{out}}(X)/(2k\epsilon^{-1}) \geq 1$. Hence, $\sum_{X \in \mathcal{C}_{\text{big}}} \text{vol}^{\text{out}}(X)/(2k\epsilon^{-1}) \geq |\mathcal{C}_{\text{big}}|$. The second inequality follows from the fact that \mathcal{C}_{big} contains

disjoint sets, and $\sum_{X \in \mathcal{C}_{\text{big}}} \text{vol}^{\text{out}}(X) \leq \text{vol}^{\text{out}}(V) = m$. The last inequality follows from Equation (15). Next, we have

$$|\mathcal{C}_{\text{small}}| \geq |\mathcal{C}|/2 \geq \epsilon m/(2k) \geq \epsilon(n\bar{d})/(2k) \geq \epsilon(n\bar{d})/2. \quad (18)$$

The first inequality follows from Equation (17) and that $\mathcal{C}_{\text{small}} = \mathcal{C} - \mathcal{C}_{\text{big}}$. The second inequality follows from Equation (15). The third inequality follows from $m = n\bar{d}$. If \bar{d} is unknown, the last part of Equation (18) becomes $m/(2k) \geq \epsilon(nk)/(8k) \geq \epsilon n/8$. This follows from Equation (8).

It suffices to show that, for each $X \in \mathcal{C}_{\text{small}}$, the average degree of vertices in X , which is $\frac{\text{vol}^{\text{out}}(X)}{|X|}$, is less than k . If this is true, then there exists node $x \in X$ where $\deg x < k$. Since the sets in \mathcal{C} are disjoint, each set $X \in \mathcal{C}$ contains a vertex with degree less than k , and $|\mathcal{C}_{\text{small}}| > \epsilon n/8$ (by Equation (16)), we have that the number of singleton vertex with degree less than k is $> \epsilon n/8$, and we are done.

Now, fix $X \in \mathcal{C}_{\text{small}}$ and we want to show that $\frac{\text{vol}^{\text{out}}(X)}{|X|} < k$. Consider three cases. If $|X| = 1$, then $\frac{\text{vol}^{\text{out}}(X)}{|X|} = d^{\text{out}}(X) < k$. Next, if $|X| \geq 2/\epsilon$, then $\frac{\text{vol}^{\text{out}}(X)}{|X|} < \frac{2k/\epsilon}{2/\epsilon} = k$ as $X \in \mathcal{C}_{\text{small}}$. In the last case, we have $2 \leq |X| < 2/\epsilon \leq k/2$. Note that $\text{vol}^{\text{out}}(X) \leq d^{\text{out}}(X) + |X|^2$ because the graph is simple. So,

$$\frac{\text{vol}(X)}{|X|} \leq \frac{d(X) + |X|^2}{|X|} < \frac{k}{|X|} + |X| < \frac{k}{2} + \frac{k}{2} = k. \quad \square$$

6.2 Testing k -Edge-Connectivity: Bounded-Degree Model

In this section, we prove Theorem 6.1 for testing k -edge-connectivity for bounded degree model. In this model, we know the maximum out-degree d . We assume that G is d -regular, meaning that every vertex has degree d . If G is not d -regular, we can “treat” G as if it is d -regular as follows. For any list L_v of size less than d , and $i \in (|L_v|, d]$, we ensure that $\text{query}(v, i)$ returns a self-loop edge (i.e., an edge (v, v)).

Edge-sampling procedure. The key property of a d -regular graph is that we can sample edge uniformly as follows. We first sample a vertex $x \in V$. Then, we make $\text{query}(x, i)$ where i is an integer sampled uniformly from $[1, d]$.

Proposition 6.8. *For any edge $e \in E$, the probability that e is sampled from the edge-sampling procedure is $1/m$.*

Proof. Fix any edge $e \in E$. The edge e belongs to some list L_v . Therefore, the probability that e is queried according to edge-sampling procedure is

$$\begin{aligned} P(e \text{ is queried}) &= P(e \text{ is queried} \mid L_v \text{ is sampled})P(L_v \text{ is sampled}) + \\ &\quad P(e \text{ is queried} \mid L_v \text{ is not sampled})P(L_v \text{ is not sampled}) \\ &= P(e \text{ is queried} \mid L_v \text{ is sampled})P(L_v \text{ is sampled}) \\ &= (1/d)(1/n) = 1/m. \end{aligned} \quad \square$$

We present an algorithm for testing k -edge-connectivity for bounded-degree model assuming Lemma 6.3.

Algorithm.

1. Sample $\Theta(\frac{1}{\epsilon})$ vertices uniformly.
2. If any of the sampled vertex has degree less than k , returns the corresponding edge-cut.

3. For each $i \in \{0, \dots, \lfloor \log_2 k \rfloor\}$, and for each $j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$ where $\eta_i = 2^{i+2}\epsilon^{-1}\lfloor \log_2 k \rfloor$,
 - (a) Sample $\Theta(\frac{\lfloor \log_2 k \rfloor \lfloor \log_2 \eta_i \rfloor}{\epsilon 2^{j-i}}) = \tilde{\Theta}(\frac{1}{\epsilon 2^{j-i}})$ edges uniformly.
 - (b) let $\nu = 2^{j+1}$, and $\text{gap} = 2^i - 1$.
 - (c) run $\text{GapLocalEC}(x, \nu, k, \text{gap})$ on both G and G^R where G^R is G with reversed edges, and x is a vertex from the sampled edge of the form (x, y) .
4. Return an edge-cut of size less than k if any execution of GapLocalEC returns a cut. Otherwise, declare that G is k -edge-connected.

Query and Time Complexity. We first show that the number of edge queries is at most $\tilde{O}(k/\epsilon)$. For each vertex x from the sampled edge (x, y) and for each (i, j) pair in loops, by Lemma 6.3, GapLocalEC queries $\tilde{O}(\nu k / \text{gap}) = \tilde{O}(2^{j-i}k)$ edges, and we sample $\tilde{O}(1/(\epsilon 2^{j-i}))$ times. Therefore, by repeating $\tilde{O}(1)$ time, the total edge queries is at most $\tilde{O}(k/\epsilon)$.

Next, we show that the running time is $\tilde{O}(k/\epsilon^{8/3})$. This follows from the same argument, but we use the running time for GapLocalEC instead of edge-query complexity. For each iteration, the running time is $\tilde{O}((\nu/\text{gap})^{5/3}k \cdot 1/(\epsilon 2^{j-i})) = \tilde{O}((2^{j-i})^{2/3}k/\epsilon) = \tilde{O}(k/\epsilon^{8/3})$. The last inequality follows because by definition $2^j \leq 2^{i+2}\epsilon^{-1}\lfloor \log_2 k \rfloor$.

Correctness. If G is k -edge-connected, then the algorithm never returns any edge-cut, and we are done. Suppose G is ϵ -far from being k -edge-connected, then we show that the algorithm outputs an edge-cut of size less than k with constant probability. Since G is d -regular, we have $\bar{d} = d$. Therefore, we can use results from Section 6.1. Let $\mathcal{F} := \{X_1, \dots, X_t\}$ as in Theorem 6.5. We assume without loss of generality that

$$\sum_i (k - d^{\text{out}}(X_i)) > \epsilon m. \quad (19)$$

Let $\mathcal{C}_{-1} = \{X \in \mathcal{F} : k \leq d^{\text{out}}(X)\}$. For $i \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\}$, let $\mathcal{C}_i = \{X \in \mathcal{F} : k - d^{\text{out}}(X) \in [2^i, 2^{i+1})\}$. Let $\mathcal{C}_{i,\text{big}} = \{X \in \mathcal{C}_i : \text{vol}^{\text{out}}(X) \geq 2^{i+2}(\lfloor \log_2 k \rfloor + 1)/\epsilon\}$, and $\mathcal{C}_{i,\text{small}} = \mathcal{C}_i - \mathcal{C}_{i,\text{big}}$. By Lemma 6.6, there is i such that

$$|\mathcal{C}_{i,\text{small}}| \geq \epsilon n \bar{d} / (4k(\lfloor \log_2 k \rfloor + 1)) = \epsilon m / (4k(\lfloor \log_2 k \rfloor + 1)). \quad (20)$$

This last inequality follows since $n\bar{d} = nd = m$. We fix i as in Equation (20). Let $\eta_i = 2^{i+2}\epsilon^{-1}\lfloor \log_2 k \rfloor$. For $j \in \{0, 1, \dots, \lfloor \log_2 \eta_i \rfloor\}$, let $\mathcal{C}_{i,\text{small},j} = \{X \in \mathcal{C}_{i,\text{small}} : \text{vol}^{\text{out}}(X) \in [2^j, 2^{j+1})\}$.

Lemma 6.9. *For i that satisfies Equation (20), there is j such that $\sum_{X \in \mathcal{C}_{i,\text{small},j}} \text{vol}^{\text{out}}(X) \geq \epsilon m 2^{j-i} / (4(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1))$.*

We show that Lemma 6.9 implies the correctness. By sampling $\Theta(\frac{\lfloor \log_2 k \rfloor \lfloor \log_2 \eta_i \rfloor}{\epsilon 2^{j-i}}) = \tilde{\Theta}(\frac{1}{\epsilon 2^{j-i}})$ edges, we get an event where a sampled edge (u, v) has $u \in X$ for some $X \in \mathcal{C}_{i,\text{small},j}$ with constant probability (since $\mathcal{C}_{i,\text{small},j}$ contains disjoint elements). For each $(i, j) \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\} \times \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$, we run GapLocalEC with $\nu = 2^{j+1}$, and $\text{gap} = 2^i - 1$; also, there exists (i, j) such that $\sum_{X \in \mathcal{C}_{i,\text{small},j}} \text{vol}^{\text{out}}(X) \geq \epsilon m 2^{j-i} / (4(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1))$ by Lemma 6.9. Therefore, by Lemma 6.3, GapLocalEC outputs an edge-cut of size less than k with constant probability.

Proof of Lemma 6.9. We claim that there is j such that

$$|\mathcal{C}_{i,\text{small},j}| \geq |\mathcal{C}_{i,\text{small}}| / (\lfloor \log_2 \eta_i \rfloor + 1) \quad (21)$$

Suppose otherwise. We have for all $j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$, $|\mathcal{C}_{i,\text{small},j}| < |\mathcal{C}_{i,\text{small}}| / (\lfloor \log_2 \eta_i \rfloor + 1)$. Therefore, $\sum_{j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}} |\mathcal{C}_{i,\text{small},j}| < |\mathcal{C}_{i,\text{small}}|$, a contradiction. Now, for the same j , we have

$$\begin{aligned}
\sum_{X \in \mathcal{C}_{i,\text{small},j}} \text{vol}^{\text{out}}(X) &\geq |\mathcal{C}_{i,\text{small},j}| 2^j \\
&\stackrel{(21)}{\geq} |\mathcal{C}_{i,\text{small}}| 2^j / (\lfloor \log_2 \eta_i \rfloor + 1) \\
&\stackrel{(20)}{\geq} \epsilon m 2^j / (4k(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1)) \\
&\stackrel{(10)}{\geq} \epsilon m 2^{j-i} / (4(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1))
\end{aligned}$$

The first inequality is because the set $\mathcal{C}_{i,\text{small},j}$ contains disjoint elements, and that $\text{vol}^{\text{out}}(X) \geq 2^j$ by definition. \square

An improved bound for a simple graph. The same algorithm gives an improved bound, $\tilde{O}(\min\{k/\epsilon, 1/\epsilon^2\})$ queries, when G is simple. If $\epsilon \geq 4/k$, then the algorithm queries at most $\tilde{O}(k/\epsilon) = \tilde{O}(1/\epsilon^2)$ edges. Otherwise, $\epsilon > 4/k$, by Lemma 6.7, there are $\Omega(\epsilon n)$ many vertices with degree less than k , and this implies that the algorithm outputs an edge-cut of size less than k at step 2.

6.3 Testing k -Vertex-Connectivity: Unbounded-Degree Model

In this section, we prove Theorem 6.1 for testing k -vertex-connectivity. The key tool for our property testing algorithm is approximate local vertex connectivity in a suitable form for the application to property testing. We can derive the following gap version of LocalVC in [NSY19] by essentially setting $\epsilon = \text{gap}/k$.

Lemma 6.10 ([NSY19] Theorem 4.1). *There is a randomized (Monte Carlo) algorithm that takes as input a vertex $x \in V$ of an n -vertex m -edge directed graph $G = (V, E)$ represented as incidence-lists with minimum out-degree $\delta \geq 1$, a volume parameter ν , a cut-size parameter k , and “gap” parameter $\text{gap} \in (0, k)$ where $\nu < \text{gap} \cdot m / (640k)$, and $k \leq n/4$, that queries at most $\tilde{O}(\nu k / \text{gap})$ edges, runs in $\tilde{O}((\nu / \text{gap})^{1.5} k)$ time and*

- if there is a separation triple (L, S, R) where $L \ni x$, $|S| < k - \text{gap}$, $\text{vol}^{\text{out}}(L) \leq \nu$ and either $\min_{v \in L} \{\text{deg}^{\text{out}}(v)\} < k$ or $|S| < k - \text{gap}$, then it returns a vertex-cut of size less than k ,
- if there is no separation triple (L, S, R) where $L \ni x$, $|S| < k$, $\text{vol}^{\text{out}}(L) \leq \nu$, then it returns the symbol \perp .

We present an algorithm for testing k -vertex-connectivity assuming Lemma 6.10, and analysis.

Algorithm.

1. Sample $\Theta(1)$ vertices uniformly.
2. If any of the sampled vertex x has out-degree less than k , returns $N(x)$.
3. Sample $\Theta(k \log k / (\epsilon \bar{d}))$ vertices uniformly (if \bar{d} is unknown, sample $\Theta(\log k / \epsilon)$ vertices instead).
4. For each sampled vertex x , and for $i \in \{0, \dots, \lfloor \log_2 k \rfloor\}$,
 - (a) let $\nu = 2^{i+3} \lfloor \log_2 k \rfloor / \epsilon$, and $\text{gap} = 2^i - 1$.

- (b) run $\text{GapLocalVC}(x, \nu, k, \text{gap})$ on both G and G^R where G^R is the same graph with reversed edges.
5. Return a vertex-cut of size less than k if any execution of GapLocalVC returns a vertex-cut. Otherwise, declare that G is k -vertex-connected.

Query and Time Complexity. We first show that the number of edge queries is at most $\tilde{O}(k^2/(\epsilon^2 \bar{d}))$. For each sampled vertex x and $i \in \{1, \dots, \lfloor \log_2 k \rfloor\}$, by Lemma 6.10, GapLocalVC queries $\tilde{O}(\nu k / \text{gap}) = \tilde{O}(k/\epsilon)$ edges. The result follows from we repeat $\lfloor \log_2 k \rfloor$ times per sample, and we sample $O(k \log k / (\epsilon \bar{d}))$ times. Next, we show that the running time is $\tilde{O}(k^2/(\epsilon^{2.5} \bar{d}))$. This follows from the same argument, but we use the running time for GapLocalVC instead of edge-query complexity.

Correctness. If G is k -vertex-connected, it is clear that the GapLocalVC never returns any vertex-cut. We show that if G is ϵ -far from k -vertex-connected, then the algorithm outputs a vertex-cut of size less than k with constant probability. We start with simple observation.

Lemma 6.11. *If $m < nk/4$, then with constant probability, the algorithm outputs an vertex-cut of size less than k at step 2.*

Proof. Suppose $m < nk/4$. There are at most $n/2$ nodes with out-degree at least k . Hence, there are at least $n/2$ nodes of degree less than k . In this case, we can sample $O(1)$ time where each sampled node x we check $|N(x)| < k$ to get k -vertex-cut with constant probability. \square

From now we assume that

$$m \geq nk/4. \tag{22}$$

We start with important properties when G is ϵ -far from k -vertex-connected. We say that two separation triples (L, S, R) and (L', S', R') are *independent* if $L \cap L' = \emptyset$ or $R \cap R' = \emptyset$.

Theorem 6.12 ([OR11] Corollary 17). *If a directed graph $G = (V, E)$ is ϵ -far from being k -vertex-connected, then there exists a set \mathcal{F}' of pairwise independent separation triples⁵ such that $\sum_{(L,S,R) \in \mathcal{F}'} \max\{k - |S|, 0\} > \epsilon m$.*

Let \mathcal{F} be a family of pairwise independent separation triples of G such that $p(\mathcal{F}) := \sum_{(L,S,R) \in \mathcal{F}} (\max\{k - |S|, 0\})$ is maximized. By Theorem 6.12, we have $\sum_{(L,S,R) \in \mathcal{F}} \max\{k - |S|, 0\} > \epsilon m$.

We say that a left-partition L of a separation triple (L, S, R) is *small* if $|L| \leq |R|$. Similarly, a right-partition R is small if $|R| \leq |L|$.

Lemma 6.13 ([FJ99] Lemma 7). *The small left-partitions⁶ in \mathcal{F} are pairwise disjoint, and the small right-partitions in \mathcal{F} are pairwise disjoint.*

Let \mathcal{F}_L be the set of separation triples with small left-partitions in \mathcal{F} , and \mathcal{F}_R be the set of separation triples with small-right partitions in \mathcal{F} . By Theorem 6.12, we have that $\max\{p(\mathcal{F}_L), p(\mathcal{F}_R)\} > \epsilon m/2$. We assume without loss of generality that

$$p(\mathcal{F}_L) > \epsilon m/2. \tag{23}$$

⁵We use the term separation triple (L, S, R) instead of the term *one-way pair* (L, R) used by [OR11] for notational consistency in our paper. These terms are equivalent in that there is no edge from L to R and our S is their $V - (L \cup R)$.

⁶In [FJ99], they use the term *one-way pair* (T, H) , and define a tail T of a pair (T, H) if *small* if $|T| \leq |H|$. Similarly, they define a head H of a pair (T, H) to be *small* if $|H| \leq |T|$. We only rephrase from “tail” to left-partition, and “head” to right-partition.

Let $\mathcal{C}_{-1} = \{(L, S, R) \in \mathcal{F}_L : k \leq |S|\}$. For $i \in \{0, \dots, \lfloor \log_2 k \rfloor\}$, let $\mathcal{C}_i = \{(L, S, R) \in \mathcal{F}_L : k - |S| \in [2^i, 2^{i+1}]\}$. Let $\mathcal{C}_{i,\text{big}} = \{(L, S, R) \in \mathcal{C}_i : \text{vol}^{\text{out}}(L) \geq 2^{i+3}\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)\}$, and $\mathcal{C}_{i,\text{small}} = \mathcal{C}_i - \mathcal{C}_{i,\text{big}}$. The following lemma is the key for the algorithm's correctness.

Lemma 6.14. *There is i such that $|\mathcal{C}_{i,\text{small}}| > \epsilon n \bar{d} / (8k(\lfloor \log_2 k \rfloor + 1))$. If \bar{d} is unknown, then there is i such that $|\mathcal{C}_{i,\text{small}}| \geq \epsilon n / (32(\lfloor \log_2 k \rfloor + 1))$.*

We show that Lemma 6.14 implies the correctness of the algorithm. By sampling $\Theta(k \log k / (\epsilon \bar{d}))$ many nodes (or $\Theta(\log k / (\epsilon))$ vertices if \bar{d} is unknown), we get an event where x belongs to some vertex set L in separation triple $(L, S, R) \in \mathcal{C}_{i,\text{small}}$ with constant probability (this follows since $\mathcal{C}_{i,\text{small}}$ contains pairwise disjoint small left-partitions by Lemma 6.13). We run GapLocalVC for every $i \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\}$, and there exists i such that $|\mathcal{C}_{i,\text{small}}| \geq \epsilon n \bar{d} / (8k(\lfloor \log_2 k \rfloor + 1))$ (or $|\mathcal{C}_{i,\text{small}}| \geq \epsilon n / (32(\lfloor \log_2 k \rfloor + 1))$) by Lemma 6.14. Therefore, by Lemma 6.10, GapLocalVC outputs a vertex-cut of size less than k with constant probability.

Proof of Lemma 6.14. We show that there is $i > 0$ such that

$$|\mathcal{C}_i| > \epsilon m / (2^{i+2}(\lfloor \log_2 k \rfloor + 1)). \quad (24)$$

First, we show that there is $i > 0$ such that

$$\sum_{(L,S,R) \in \mathcal{C}_i} (k - |S|) > \epsilon m / (2(\lfloor \log_2 k \rfloor + 1)). \quad (25)$$

Suppose otherwise that for every i , $\sum_{(L,S,R) \in \mathcal{C}_i} (k - |S|) \leq \epsilon m / (2(\lfloor \log_2 k \rfloor + 1))$. We have $\sum_{(L,S,R) \in \mathcal{F}_L} (\max\{k - |S|, 0\}) = \sum_{i=-1}^{\lfloor \log_2 k \rfloor} \sum_{(L,S,R) \in \mathcal{C}_i} (k - |S|) = \sum_{i=0}^{\lfloor \log_2 k \rfloor} \sum_{(L,S,R) \in \mathcal{C}_i} (k - |S|) \leq \epsilon m / 2$. However, this contradicts Equation (23). Second, we show that for any i ,

$$|\mathcal{C}_i| 2^{i+1} \geq \sum_{(L,S,R) \in \mathcal{C}_i} (k - |S|). \quad (26)$$

This follows trivially from that each (L, S, R) in the set \mathcal{C}_i , $k - |S| \leq 2^{i+1}$. Therefore, for i that satisfies Equation (25), we have

$$|\mathcal{C}_i| \stackrel{(26)}{\geq} \sum_{(L,S,R) \in \mathcal{C}_i} (k - |S|) / 2^{i+1} \stackrel{(25)}{>} \epsilon m / (2^{i+2}(\lfloor \log_2 k \rfloor + 1)). \quad (27)$$

Recall that $\mathcal{C}_{i,\text{big}} = \{(L, S, R) \in \mathcal{C}_i : \text{vol}^{\text{out}}(L) \geq 2^{i+3}(\lfloor \log_2 k \rfloor + 1)/\epsilon\}$, and $\mathcal{C}_{i,\text{small}} = \mathcal{C}_i - \mathcal{C}_{i,\text{big}}$. We claim that for i that satisfies Equation (27), $|\mathcal{C}_{i,\text{big}}| < |\mathcal{C}_i|/2$. Indeed, we have

$$4|\mathcal{C}_{i,\text{big}}| \leq \sum_{(L,S,R) \in \mathcal{C}_{i,\text{big}}} \text{vol}^{\text{out}}(L) / (\gamma \epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)) \leq m / (\gamma \epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)) \stackrel{(24)}{<} 2|\mathcal{C}_i|.$$

The first inequality follows because $\text{vol}^{\text{out}}(L) / (2^{i+1}\epsilon^{-1}(\lfloor \log_2 k \rfloor + 1)) \geq 4$ for each $(L, S, R) \in \mathcal{C}_{i,\text{big}}$. The second inequality follows since left-partitions in $\mathcal{C}_{i,\text{big}}$ are disjoint, and $\sum_{(L,S,R) \in \mathcal{C}_{i,\text{big}}} \text{vol}^{\text{out}}(L) \leq m$.

Next, we have

$$|\mathcal{C}_{i,\text{small}}| \geq |\mathcal{C}_i|/2 \stackrel{(24)}{>} \epsilon m / (2^{i+3}(\lfloor \log_2 k \rfloor + 1)) \geq \epsilon n \bar{d} / (8k(\lfloor \log_2 k \rfloor + 1)). \quad (28)$$

The first inequality follows because $|\mathcal{C}_{i,\text{big}}| < |\mathcal{C}_i|/2$, and $|\mathcal{C}_i| = |\mathcal{C}_{i,\text{big}}| + |\mathcal{C}_{i,\text{small}}|$. The last inequality follows because $m = n \bar{d}$, and $2^i \leq k$. If \bar{d} is unknown, the last inequality of Equation (28) becomes $\epsilon m / (2^{i+3}(\lfloor \log_2 k \rfloor + 1)) \stackrel{(22)}{\geq} \epsilon n k / (32k(\lfloor \log_2 k \rfloor + 1)) = \epsilon n / (32(\lfloor \log_2 k \rfloor + 1))$. \square

6.4 Testing k -Vertex-Connectivity: Bounded-Degree Model

In this section, we prove Theorem 6.1 for testing k -vertex-connectivity for bounded degree model. By the same argument in Section 6.2, we assume that G is d -regular, and thus we can sample edge uniformly by Proposition 6.8.

We present an algorithm for testing k -edge-connectivity for bounded-degree model assuming Lemma 6.10.

Algorithm.

1. Sample $\Theta(1)$ vertices uniformly.
2. If any of the sampled vertex has degree less than k , returns its out-neighbors.
3. For each $i \in \{0, \dots, \lfloor \log_2 k \rfloor\}$, and for each $j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$ where $\eta_i = 2^{i+2}\epsilon^{-1}\lfloor \log_2 k \rfloor$,
 - (a) Sample $\Theta\left(\frac{\lfloor \log_2 k \rfloor \lfloor \log_2 \eta_i \rfloor}{\epsilon 2^{j-i}}\right) = \tilde{\Theta}\left(\frac{1}{\epsilon 2^{j-i}}\right)$ edges uniformly.
 - (b) let $\nu = 2^{j+1}$, and $\text{gap} = 2^i - 1$.
 - (c) run $\text{GapLocalVC}(x, \nu, k, \text{gap})$ on both G and G^R where G^R is G with reversed edges, and x is a vertex from the sampled edge of the form (x, y) .
4. Return a vertex-cut of size less than k if any execution of GapLocalVC returns a vertex-cut. Otherwise, declare that G is k -vertex-connected.

Query and Time Complexity. We first show that the number of edge queries is at most $\tilde{O}(k/\epsilon)$. For each vertex x from the sampled edge (x, y) and for each (i, j) pair in loops, by Lemma 6.10, GapLocalVC queries $\tilde{O}(\nu k / \text{gap}) = \tilde{O}(2^{j-i} k)$ edges, and we sample $\tilde{O}(1/(\epsilon 2^{j-i}))$ times. Therefore, by repeating $\tilde{O}(1)$ iterations, the total edge queries is at most $\tilde{O}(k/\epsilon)$.

Next, we show that the running time is $\tilde{O}(k/\epsilon^{1.5})$. This follows from the same argument, but we use the running time for GapLocalEC instead of edge-query complexity. For each iteration, the running time is $\tilde{O}((\nu/\text{gap})^{1.5} k \cdot 1/(\epsilon 2^{j-i})) = \tilde{O}((2^{j-i})^{1.5} k / (\epsilon 2^{j-i})) = \tilde{O}(k/\epsilon^{1.5})$. The last inequality follows because by definition $2^j \leq 2^{i+2}\epsilon^{-1}\lfloor \log_2 k \rfloor$.

Correctness. If G is k -vertex-connected, then the algorithm never returns any vertex-cut, and we are done. Suppose G is ϵ -far from being k -vertex-connected, then we show that the algorithm outputs a vertex-cut of size less than k with constant probability. Since G is d -regular, we have $\bar{d} = d$. Therefore, we can use results from Section 6.3. Let \mathcal{F}_L be the set of separation triples with small left-partitions in \mathcal{F} , and \mathcal{F}_R be the set of separation triples with small-right partitions in \mathcal{F} . By Theorem 6.12, we have that $\max\{p(\mathcal{F}_L), p(\mathcal{F}_R)\} > \epsilon m/2$. We assume without loss of generality that

$$p(\mathcal{F}_L) > \epsilon m/2. \quad (29)$$

Let $\mathcal{C}_{-1} = \{(L, S, R) \in \mathcal{F}_L : k \leq |S|\}$. For $i \in \{0, \dots, \lfloor \log_2 k \rfloor\}$, let $\mathcal{C}_i = \{(L, S, R) \in \mathcal{F}_L : k - |S| \in [2^i, 2^{i+1}]\}$. Let $\mathcal{C}_{i,\text{big}} = \{(L, S, R) \in \mathcal{C}_i : \text{vol}^{\text{out}}(L) \geq 2^{i+3}\epsilon^{-1}\lfloor \log_2 k \rfloor\}$, and $\mathcal{C}_{i,\text{small}} = \mathcal{C}_i - \mathcal{C}_{i,\text{big}}$. By Lemma 6.14, there is i such that

$$|\mathcal{C}_{i,\text{small}}| > \epsilon n \bar{d} / (8k(\lfloor \log_2 k \rfloor + 1)) = \epsilon m / (8k(\lfloor \log_2 k \rfloor + 1)). \quad (30)$$

The last inequality follows since $n \bar{d} = nd = m$. We fix i as in Equation (30). Let $\eta_i = 2^{i+3}\epsilon^{-1}\lfloor \log_2 k \rfloor$. For $j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$, let $\mathcal{C}_{i,\text{small},j} = \{(L, S, R) \in \mathcal{C}_{i,\text{small}} : \text{vol}^{\text{out}}(L) \in [2^j, 2^{j+1}]\}$.

Lemma 6.15. *For i that satisfies Equation (30), there is j such that $\sum_{(L,S,R) \in \mathcal{C}_{i,\text{small},j}} \text{vol}^{\text{out}}(L) \geq \epsilon m 2^{j-i} / (8(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1))$.*

We show that Lemma 6.15 implies the correctness. By sampling $\Theta(\frac{\lfloor \log_2 k \rfloor \lfloor \log_2 \eta_i \rfloor}{\epsilon 2^{j-i}}) = \tilde{\Theta}(\frac{1}{\epsilon 2^{j-i}})$ edges, we get an event where a sampled edge (u, v) has $u \in L$ for some L from a separation triple $(L, S, R) \in \mathcal{C}_{i,\text{small},j}$ with constant probability (since $\mathcal{C}_{i,\text{small}}$ contains pairwise disjoint small left-partitions by Lemma 6.13). For each $(i, j) \in \{0, 1, \dots, \lfloor \log_2 k \rfloor\} \times \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$, we run GapLocalVC with $\nu = 2^{j+1}$, and $\text{gap} = 2^i - 1$; also, there exists (i, j) such that $\sum_{X \in \mathcal{C}_{i,\text{small},j}} \text{vol}^{\text{out}}(X) \geq \epsilon m 2^{j-i} / (8(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1))$ by Lemma 6.15. Therefore, by Lemma 6.10, GapLocalVC outputs a vertex-cut of size less than k with constant probability.

Proof of Lemma 6.15. We claim that there is j such that

$$|\mathcal{C}_{i,\text{small},j}| \geq |\mathcal{C}_{i,\text{small}}| / (\lfloor \log_2 \eta_i \rfloor + 1) \quad (31)$$

Suppose otherwise. We have for all $j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}$, $|\mathcal{C}_{i,\text{small},j}| < |\mathcal{C}_{i,\text{small}}| / (\lfloor \log_2 \eta_i \rfloor + 1)$. Therefore, $\sum_{j \in \{0, \dots, \lfloor \log_2 \eta_i \rfloor\}} |\mathcal{C}_{i,\text{small},j}| < |\mathcal{C}_{i,\text{small}}|$, a contradiction. Now, for the same j , we have

$$\begin{aligned} \sum_{(L,S,R) \in \mathcal{C}_{i,\text{small},j}} \text{vol}^{\text{out}}(L) &\geq |\mathcal{C}_{i,\text{small},j}| 2^j \\ &\stackrel{(31)}{\geq} |\mathcal{C}_{i,\text{small}}| 2^j / (\lfloor \log_2 \eta_i \rfloor + 1) \\ &\stackrel{(30)}{\geq} \epsilon m 2^j / (8k(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1)) \\ &\geq \epsilon m 2^{j-i} / (8(\lfloor \log_2 k \rfloor + 1)(\lfloor \log_2 \eta_i \rfloor + 1)) \end{aligned}$$

The first inequality is because the small left-partitions in $\mathcal{C}_{i,\text{small},j}$ are pairwise disjoint by Lemma 6.13, and that $\text{vol}^{\text{out}}(L) \geq 2^j$ by definition. The last inequality follows since $2^i \leq k$ by definition. \square

Acknowledgement

This project has received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme under grant agreement No 715672 and 759557. Nanongkai was also partially supported by the Swedish Research Council (Reg. No. 2015-04659.).

References

- [AHU74] Alfred V. Aho, John E. Hopcroft, and Jeffrey D. Ullman. *The Design and Analysis of Computer Algorithms*. Addison-Wesley, 1974 (cit. on p. 1).
- [BDD+82] Michael Becker, W. Degenhardt, Jürgen Doenhardt, Stefan Hertel, Gerd Kaninke, W. Kerber, Kurt Mehlhorn, Stefan Näher, Hans Rohnert, and Thomas Winter. “A Probabilistic Algorithm for Vertex Connectivity of Graphs”. In: *Inf. Process. Lett.* 15.3 (1982), pp. 135–136 (cit. on p. 1).
- [CGK14] Keren Censor-Hillel, Mohsen Ghaffari, and Fabian Kuhn. “Distributed connectivity decomposition”. In: *PODC*. ACM, 2014, pp. 156–165 (cit. on p. 1).

- [CHI+17] Shiri Chechik, Thomas Dueholm Hansen, Giuseppe F. Italiano, Veronika Loitzenbauer, and Nikos Parotsidis. “Faster Algorithms for Computing Maximal 2-Connected Subgraphs in Sparse Directed Graphs”. In: *SODA*. SIAM, 2017, pp. 1900–1918 (cit. on pp. 1, 2).
- [CK19] Julia Chuzhoy and Sanjeev Khanna. “A New Algorithm for Decremental Single-Source Shortest Paths with Applications to Vertex-Capacitated Flow and Cut Problems”. To appear at STOC’19. 2019 (cit. on p. 12).
- [CR94] Joseph Cheriyan and John H. Reif. “Directed s - t Numberings, Rubber Bands, and Testing Digraph k -Vertex Connectivity”. In: *Combinatorica* 14.4 (1994). Announced at SODA’92, pp. 435–451 (cit. on pp. 1, 11).
- [CT91] Joseph Cheriyan and Ramakrishna Thurimella. “Algorithms for Parallel k -Vertex Connectivity and Sparse Certificates (Extended Abstract)”. In: *STOC*. ACM, 1991, pp. 391–401 (cit. on p. 1).
- [EH84] Abdol-Hossein Esfahanian and S. Louis Hakimi. “On computing the connectivities of graphs and digraphs”. In: *Networks* 14.2 (1984), pp. 355–366 (cit. on p. 1).
- [ET75] Shimon Even and Robert Endre Tarjan. “Network Flow and Testing Graph Connectivity”. In: *SIAM J. Comput.* 4.4 (1975), pp. 507–518 (cit. on p. 1).
- [Eve75] Shimon Even. “An Algorithm for Determining Whether the Connectivity of a Graph is at Least k ”. In: *SIAM J. Comput.* 4.3 (1975), pp. 393–396 (cit. on pp. 1, 8).
- [FJ99] András Frank and Tibor Jordán. “Directed vertex-connectivity augmentation”. In: *Math. Program.* 84.3 (1999), pp. 537–553 (cit. on pp. 13, 20).
- [FY19] Sebastian Forster and Liu Yang. *A Faster Local Algorithm for Detecting Bounded-Size Cuts with Applications to Higher-Connectivity Problems*. 2019. arXiv: 1904.08382 [cs.DS] (cit. on pp. 2–4).
- [GGR98] Oded Goldreich, Shafi Goldwasser, and Dana Ron. “Property Testing and its Connection to Learning and Approximation”. In: *J. ACM* 45.4 (1998). Announced at FOCS’96, pp. 653–750 (cit. on p. 3).
- [GR02] Oded Goldreich and Dana Ron. “Property Testing in Bounded Degree Graphs”. In: *Algorithmica* 32.2 (2002). Announced at STOC’97, pp. 302–343 (cit. on pp. 1, 3).
- [Gab06] Harold N. Gabow. “Using expander graphs to find vertex connectivity”. In: *J. ACM* 53.5 (2006). Announced at FOCS’00, pp. 800–844 (cit. on p. 1).
- [Gal80] Zvi Galil. “Finding the Vertex Connectivity of Graphs”. In: *SIAM J. Comput.* 9.1 (1980), pp. 197–199 (cit. on p. 1).
- [HRG00] Monika Rauch Henzinger, Satish Rao, and Harold N. Gabow. “Computing Vertex Connectivity: New Bounds from Old Techniques”. In: *J. Algorithms* 34.2 (2000). Announced at FOCS’96, pp. 222–250 (cit. on pp. 1, 2, 8, 10–12).
- [HT73] John E. Hopcroft and Robert Endre Tarjan. “Dividing a Graph into Triconnected Components”. In: *SIAM J. Comput.* 2.3 (1973), pp. 135–158 (cit. on p. 2).
- [Hen97] Monika Rauch Henzinger. “A Static 2-Approximation Algorithm for Vertex Connectivity and Incremental Approximation Algorithms for Edge and Vertex Connectivity”. In: *J. Algorithms* 24.1 (1997), pp. 194–220 (cit. on p. 1).
- [Kle69] D Kleitman. “Methods for investigating connectivity of large graphs”. In: *IEEE Transactions on Circuit Theory* 16.2 (1969), pp. 232–233 (cit. on p. 1).

- [LLW88] Nathan Linial, László Lovász, and Avi Wigderson. “Rubber bands, convex embeddings and graph connectivity”. In: *Combinatorica* 8.1 (1988). Announced at FOCS’86, pp. 91–102 (cit. on pp. 1, 2, 10).
- [Mat87] David W. Matula. “Determining Edge Connectivity in $O(nm)$ ”. In: *FOCS*. IEEE Computer Society, 1987, pp. 249–251 (cit. on p. 1).
- [NI92] Hiroshi Nagamochi and Toshihide Ibaraki. “A Linear-Time Algorithm for Finding a Sparse k -Connected Spanning Subgraph of a k -Connected Graph”. In: *Algorithmica* 7.5&6 (1992), pp. 583–596 (cit. on pp. 1, 2, 12).
- [NSY19] Danupon Nanongkai, Thatchaphol Saranurak, and Sorrachai Yingchareonthawornchai. “Breaking Quadratic Time for Small Vertex Connectivity and an Approximation Scheme”. *STOC*. 2019 (cit. on pp. 1, 2, 10–13, 19).
- [OR11] Yaron Orenstein and Dana Ron. “Testing Eulerianity and connectivity in directed sparse graphs”. In: *Theor. Comput. Sci.* 412.45 (2011), pp. 6390–6408 (cit. on pp. 1, 3, 4, 13, 14, 20).
- [Pod73] VD Podderugin. “An algorithm for finding the edge connectivity of graphs”. In: *Vopr. Kibern* 2 (1973), p. 136 (cit. on p. 1).
- [Tar72] Robert Endre Tarjan. “Depth-First Search and Linear Graph Algorithms”. In: *SIAM J. Comput.* 1.2 (1972). Announced at FOCS’71, pp. 146–160 (cit. on p. 2).
- [YI10] Yuichi Yoshida and Hiro Ito. “Testing k -edge-connectivity of digraphs”. In: *J. Systems Science & Complexity* 23.1 (2010), pp. 91–101 (cit. on pp. 1, 3, 4).
- [YI12] Yuichi Yoshida and Hiro Ito. “Property Testing on k -Vertex-Connectivity of Graphs”. In: *Algorithmica* 62.3-4 (2012), pp. 701–712 (cit. on pp. 1, 3, 4).

A An alternate algorithm for local edge connectivity

In this section, we show local algorithms for detecting an edge cut of size k and volume ν containing some seed node in time $O(\nu k^2)$. Both the algorithms and analysis are very simple.

Theorem A.1. *There is a randomized (Monte Carlo) algorithm that takes as input a vertex $x \in V$ of an n -vertex m -edge graph $G = (V, E)$ represented as adjacency lists, a volume parameter ν , a cut-size parameter $k \geq 1$, and an accuracy parameter $\epsilon \in (0, 1]$ where $\nu < \epsilon m/8$ and runs in $O(\nu k/\epsilon)$ time and outputs either*

- the “ \perp ” symbol indicating that, with probability $1/2$, there is no $S \ni x$ where $|E(S, V - S)| < k$ and $\text{vol}^{\text{out}}(S) \leq \nu$, or
- a set $S \ni x$ where $S \neq V$, $|E(S, V - S)| < \lfloor (1 + \epsilon)k \rfloor$ and $\text{vol}^{\text{out}}(S) \leq 10\nu/\epsilon$.⁷

By setting $\epsilon < \frac{1}{k}$, we have that $\lfloor (1 + \epsilon)k \rfloor = k$. In particular, we obtain an algorithm for the exact problem:

Corollary A.2. *There is a randomized (Monte Carlo) algorithm that takes as input a vertex $x \in V$ of an n -vertex m -edge graph $G = (V, E)$ represented as adjacency lists, a volume parameter ν , and a cut-size parameter $k \geq 1$ where $\nu < m/8k$ and runs in $O(\nu k^2)$ time and outputs either*

⁷We note that the factor 10 in Theorem A.1 can be improved. We only use this factor for simplifying the analysis.

- the “ \perp ” symbol indicating that, with probability $1/2$, there is no $S \ni x$ where $|E(S, V - S)| < k$ and $\text{vol}^{\text{out}}(S) \leq \nu$, or
- a set $S \ni x$ where $S \neq V$, $|E(S, V - S)| < k$ and $\text{vol}^{\text{out}}(S) \leq 10\nu k$.

Algorithm 2: LocalEC(x, ν, k, ϵ)

```

1 repeat  $\lfloor (1 + \epsilon)k \rfloor$  times
2   Grow a DFS tree  $T$  starting from  $x$  and stop once exactly  $8\nu/\epsilon$  edges have been visited.
3   Let  $E_{\text{DFS}}$  be the set of edges visited.
4   if  $|E_{\text{DFS}}| < 8\nu/\epsilon$  then return  $V(T)$ .
5   else
6     Sample an edge  $(y', y) \in E_{\text{DFS}}$  uniformly.
7     Reverse the direction of edges in the path  $P_{xy}$  in  $T$  from  $x$  to  $y$ .
8 return  $\perp$ .
```

The algorithm for Theorem A.1 is described in Algorithm 2. We start with the following important observation.

Lemma A.3. *Let $S \subset V$ be any set where $x \in S$. Let P_{xy} be a path from x to y . Suppose we reverse the direction of edges in P_{xy} . Then, we have $|E(S, V - S)|$ and $\text{vol}^{\text{out}}(S)$ are both decreased exactly by one if $y \notin S$. Otherwise, $|E(S, V - S)|$ and $\text{vol}^{\text{out}}(S)$ stay the same.*

It is clear that running time of Algorithm 2 is $\lfloor (1 + \epsilon)k \rfloor \times O(\nu/\epsilon) = O(\nu k/\epsilon)$ because the DFS tree only requires $O(\nu/\epsilon)$ for visiting $O(\nu/\epsilon)$ edges. The two lemmas below imply the correctness of Theorem A.1

Lemma A.4. *If a set S is returned, then $S \ni x$, $S \neq V$, $|E(S, V - S)| < \lfloor (1 + \epsilon)k \rfloor$ and $\text{vol}^{\text{out}}(S) \leq 10\nu/\epsilon$.*

Proof. If S is returned, then the DFS tree T get stuck at $S = V(T)$. That is, $|E(S, V - S)| = 0$ and $\text{vol}^{\text{out}}(S) \leq 8\nu/\epsilon$ at the end of the algorithm. Note that $x \in S$ and $S \neq V$ because $8\nu/\epsilon < m$. Observe that the algorithm has reversed strictly less than $\lfloor (1 + \epsilon)k \rfloor$ many paths P_{xy} , because the algorithm did not reverse a path in the iteration that S is returned. So Lemma A.3 implies that, initially, $|E(S, V - S)| < \lfloor (1 + \epsilon)k \rfloor$ and, $\text{vol}^{\text{out}}(S) < 8\nu/\epsilon + \lfloor (1 + \epsilon)k \rfloor \leq 10\nu/\epsilon$. \square

Lemma A.5. *If \perp is returned, then, with probability at least $1/2$, there is no $S \ni x$ where $|E(S, V - S)| < k$ and $\text{vol}^{\text{out}}(S) \leq \nu$.*

Proof. Suppose that such S exists. We will show that \perp is returned with probability less than $1/2$. Suppose that no set S' is returned before the last iteration. It suffices to show that at the beginning of the last iteration, $|E(S, V - S)| = 0$ with probability at least $1/2$. If this is true, then the DFS tree T in the last iteration will not be able to visit more than ν edges and so will return the set $V(T)$.

Let $k' = \lfloor (1 + \epsilon)k \rfloor - 1$ denote the number of iterations excluding the last one. Let X_i be the random variable where $X_i = 1$ if the sampled edge (y', y) in the i -th iteration of the algorithm is such that $y \in S$. Otherwise, $X_i = 0$. As $\text{vol}^{\text{out}}(S)$ never increases, observe that $E[X_i] \leq \frac{\text{vol}^{\text{out}}(S)}{|E_{\text{DFS}}|} \leq \frac{\nu}{8\nu/\epsilon} = \epsilon/8$ for each $i \leq k'$. Let $X = \sum_{i=1}^{k'} X_i$. We have $E[X] \leq \epsilon k'/8$ by linearity of expectation and $\Pr[X \leq \epsilon k'/4] \geq 1/2$ by Markov's inequality. So $\Pr[X \leq \lfloor \epsilon k'/4 \rfloor] \geq 1/2$ as X is integral.

Let $Y = k' - X$. Notice that Y is the number of times before the last iteration where the algorithm samples $y \notin S$. We claim that $k' - \lfloor \epsilon k'/4 \rfloor \geq k - 1$ (see the proof at the end). Hence, with probability at least $1/2$, $Y \geq k' - \lfloor \epsilon k'/4 \rfloor \geq k - 1 \geq |E(S, V - S)|$. By Lemma A.3, if $Y \geq |E(S, V - S)|$, then $|E(S, V - S)| = 0$ at the beginning of the last iteration. This concludes the proof.

Claim A.6. $k' - \lfloor \epsilon k'/4 \rfloor \geq k - 1$ for $\epsilon \in [0, 1]$

Proof. If $\epsilon < 4/k'$, then $\lfloor \epsilon k'/4 \rfloor = 0$, so $k' - \lfloor \epsilon k'/4 \rfloor = \lfloor (1 + \epsilon)k \rfloor - 1 \geq k - 1$. If $\epsilon \geq 4/k'$, then⁸

$$\begin{aligned}
k' - \lfloor \epsilon k'/4 \rfloor &\geq (1 - \epsilon/4)k' \\
&\geq (1 - \epsilon/4)((1 + \epsilon)k - 2) \\
&\geq (1 - \epsilon/4)(1 + \epsilon)k - 2 \\
&\geq (1 + \epsilon/2)k - 2 \\
&\geq k - 1.
\end{aligned}$$

where the last inequality is because $\epsilon k/2 \geq \frac{4}{k'} \cdot \frac{k}{2} \geq 1$ as $k' \leq \lfloor (1 + \epsilon)k \rfloor \leq 2k$. □

□

⁸The main reason we choose the factor 8 in the number $8\nu/\epsilon$ of visited edges by the DFS is for simplifying the following inequalities.